

Top 100
Global
Innovator
for 10 years

XGT Series

Programmable Logic Controller



LS ELECTRIC

XGT series, innovative solutions for system integration
from field to information level.

Open Network System Integration



neXt Generation Technology
XGT Series



FEATURES 4 ~ 13



CPU 14 ~ 31



SYSTEM 32 ~ 43



NETWORK 44 ~ 93



SPECIAL 94 ~ 125



SOFTWARE 126 ~ 147

FEATURES

CPU

SYSTEM

NETWORK

SPECIAL

SOFTWARE

Welcome to XGT World!

XGT series will meet your needs and expectations, enabling the highest possible productivity and performance levels and more.



XGK // CPUU CPU5
CPUH CPUE
CPUA




Features

XGT series is the next-generation solution with a new concept providing advanced engineering environment based on open network, fastest processing speed, compact size and user-friendly software.



Also, LS ELECTRIC has been certified with IEC 62443-4-1:
Secure product development lifecycle requirements for industrial
automation and control systems by TÜV SÜD

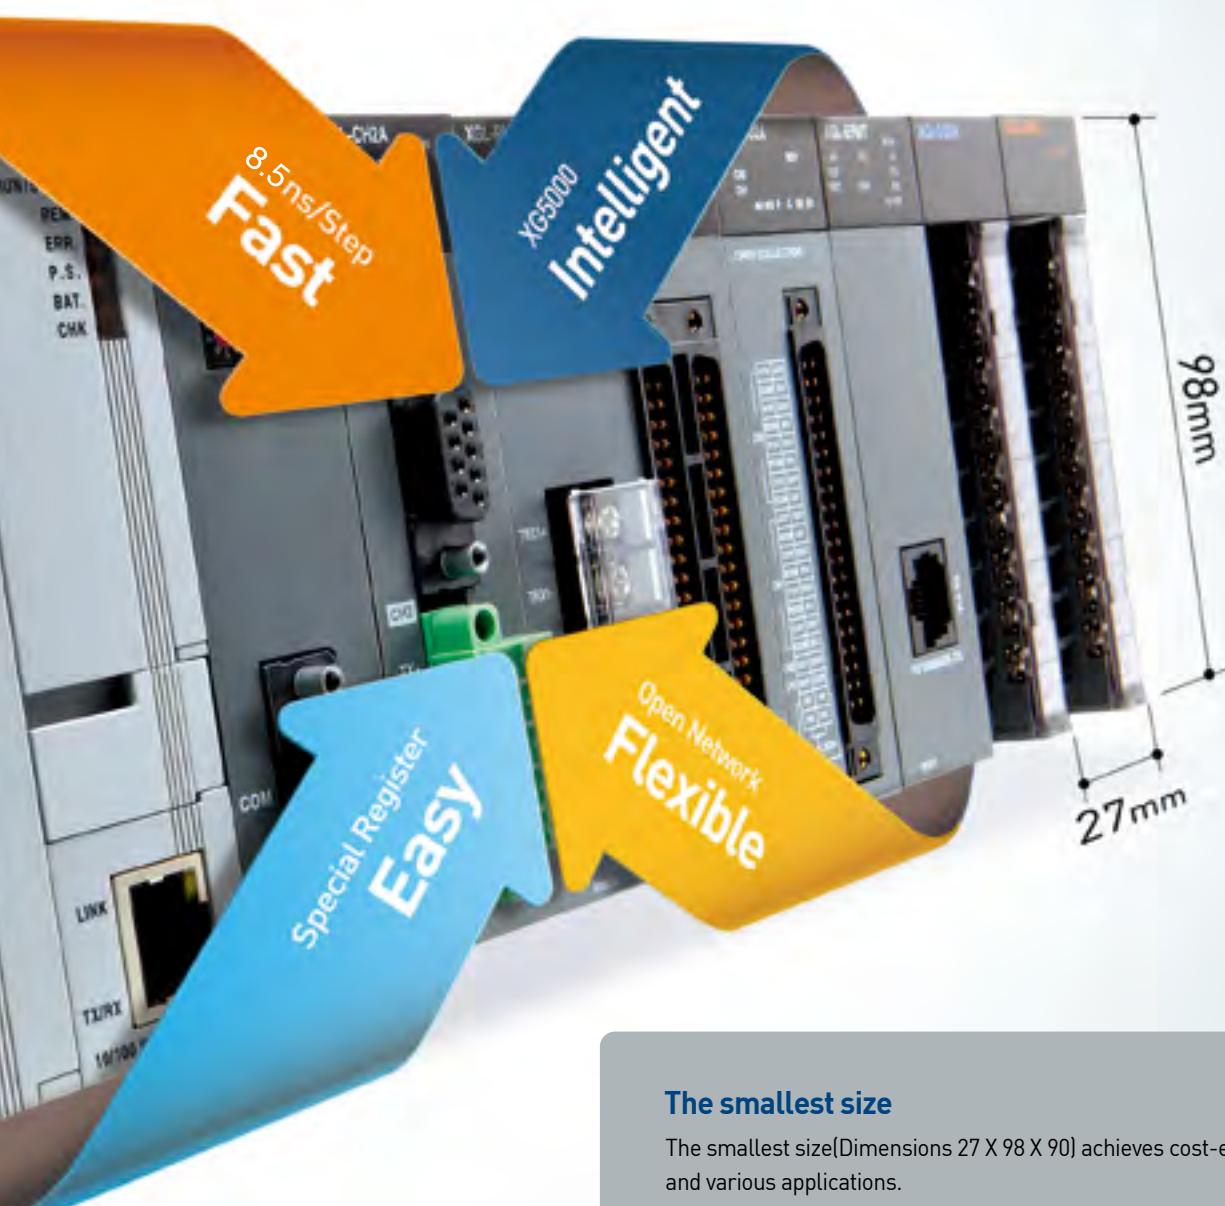

The smallest size

The smallest size(Dimensions 27 X 98 X 90) achieves cost-efficiency and various applications.

Item	Power Supply	CPU	8-slot Base
Size (WxHxD)	55x98x90	27x98x90	318x98x17


Features

XGT series, neXt Generation Technology for easier, faster and smarter automation, will provide you with future-oriented solutions, bringing greener, safer and more convenient life for you...

System Integration of Open Network

XGT series support various communication solutions ranging from field control to information level with Fast Ethernet, Profibus-DP, DeviceNet, Modbus, etc.




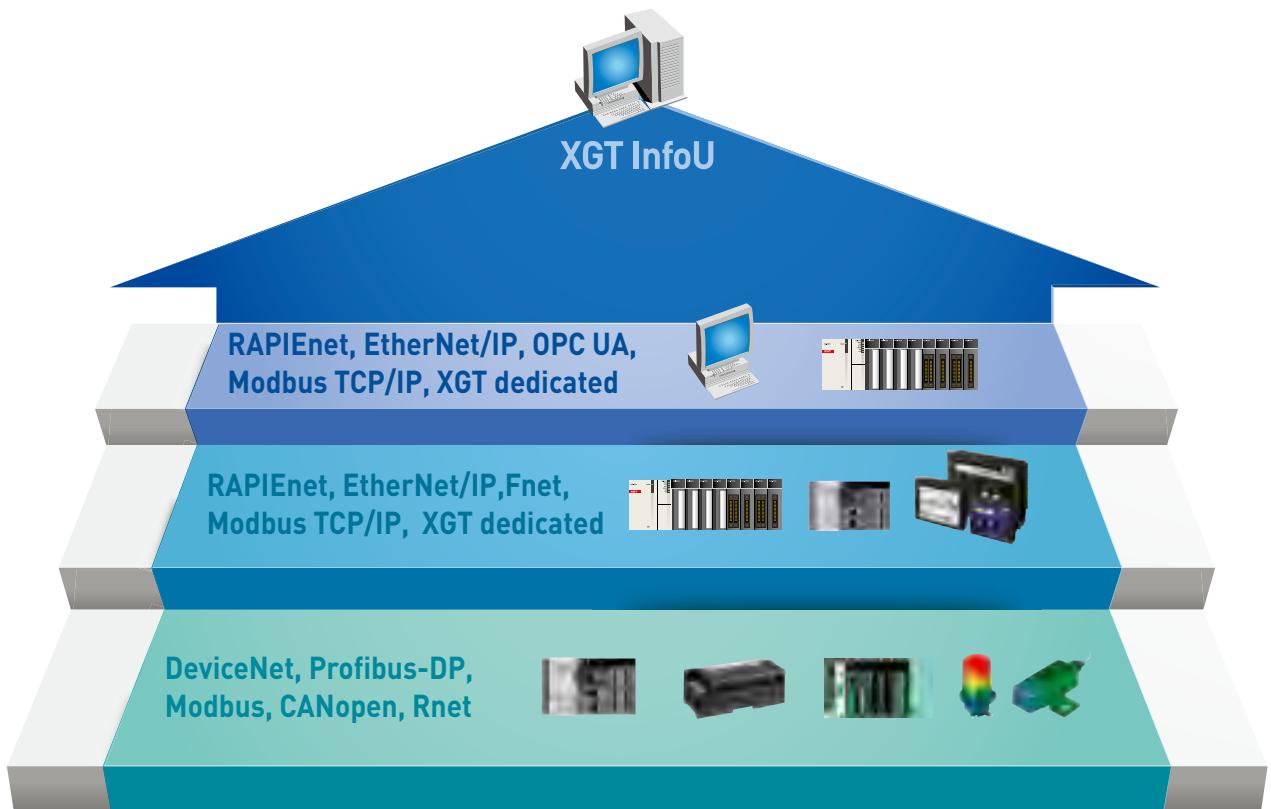

Do you want more
powerful features and performance?
answer is LS ELECTRIC

XGT New CPU


New XGT CPU has 3 times faster cpu processing speed,
2 times larger memory capacity and built in ethernet port.

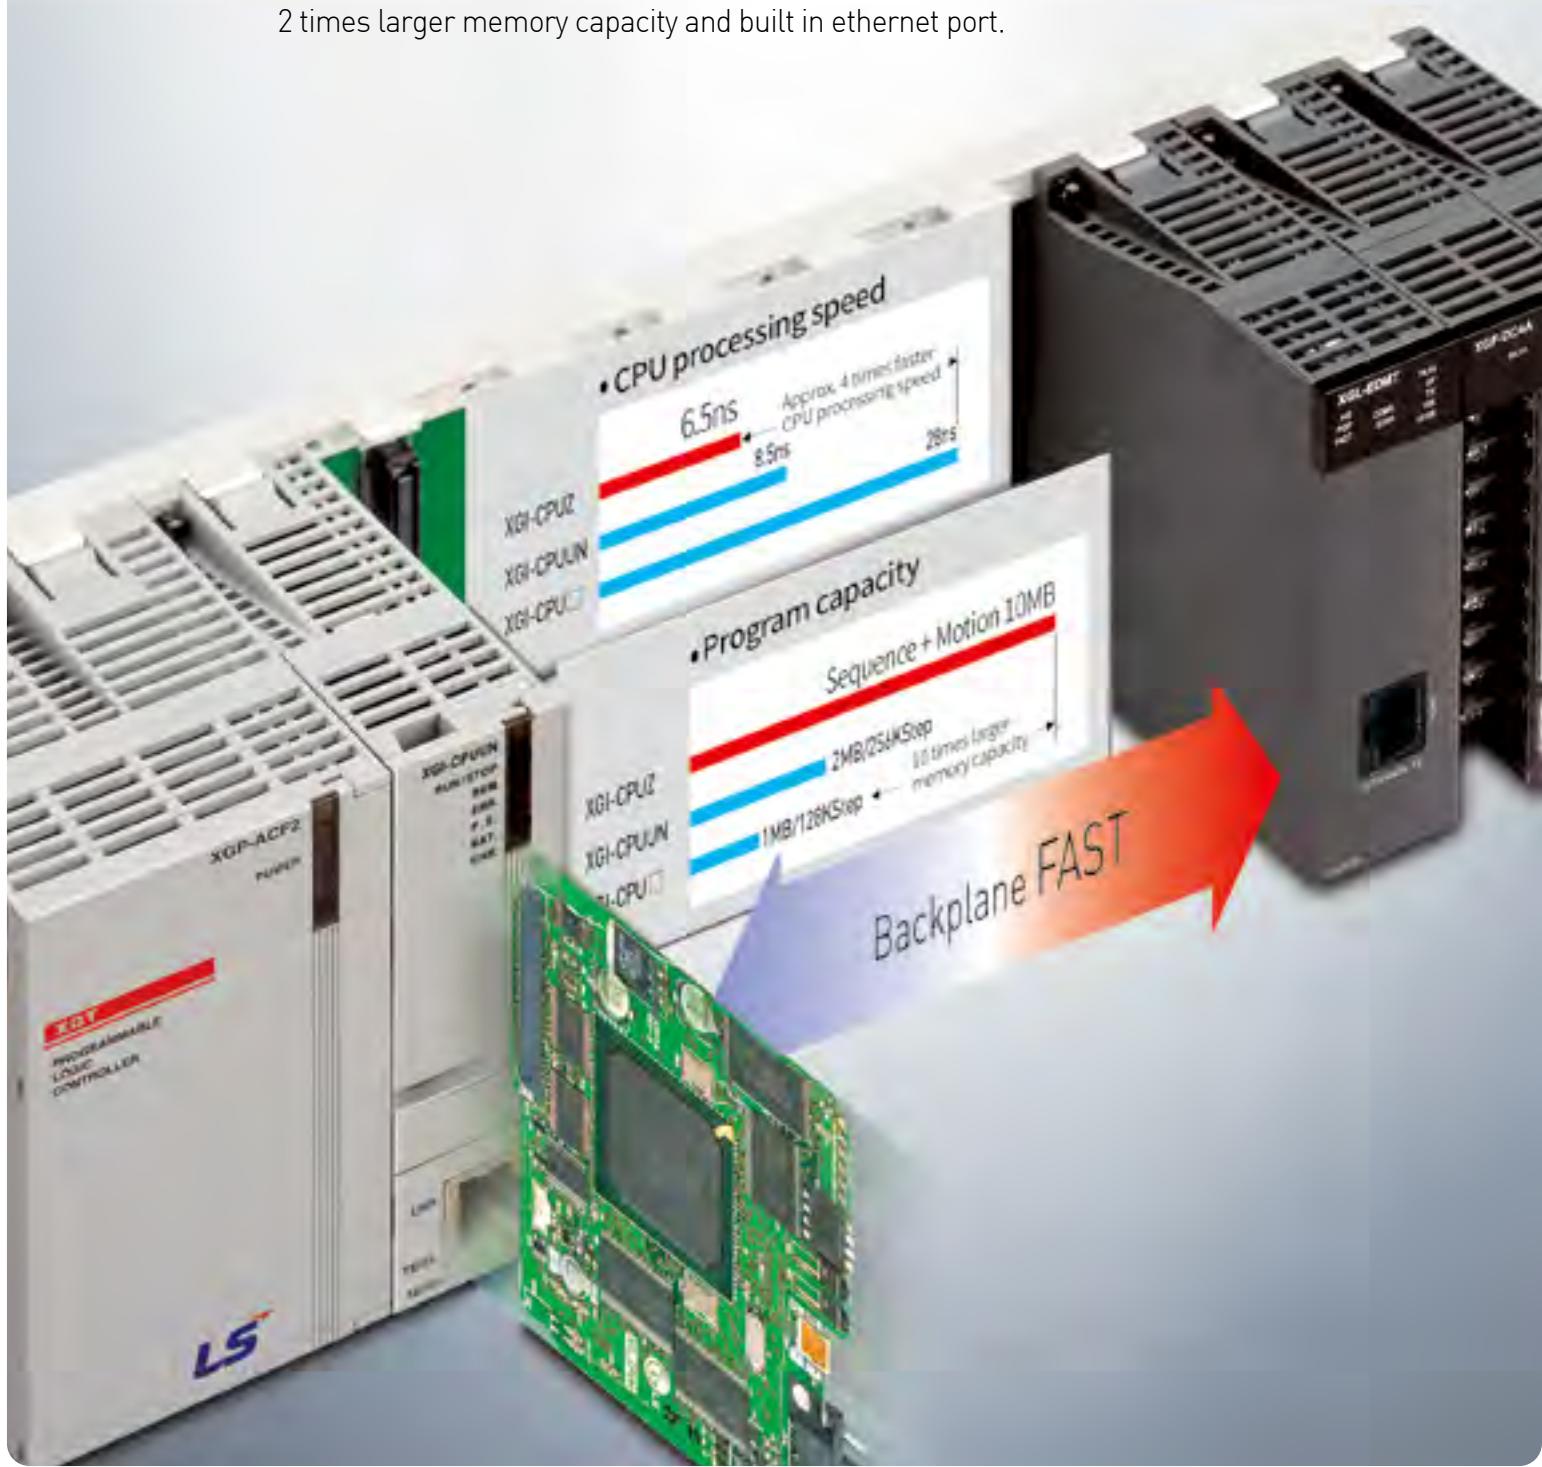

Compare of scan time between XGI-CPUU and XGI-CPUUN


Using 1 MOVE word

Item	XGI-CPUZ	XGI-CPUUN	XGI-CPUU/D	XGI-CPUU	XGI-CPUH	XGI-CPUS
Current scan time	0.4ms	1.0ms	0.5ms	0.9ms	0.9ms	0.8ms
Min. scan time	0.3ms	0.8ms	0.4ms	0.8ms	0.8ms	0.7ms
Max. scan time	0.5ms	1.1ms	0.7ms	1.4ms	2.2ms	2.1ms

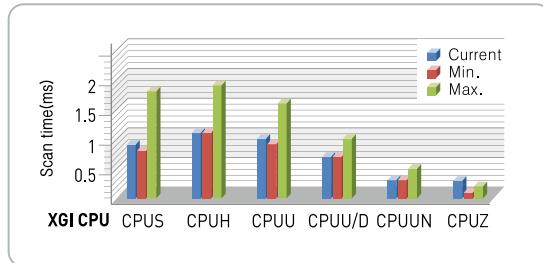


Using 1,000 MOVE word

Item	XGI-CPUZ	XGI-CPUUN	XGI-CPUU/D	XGI-CPUU	XGI-CPUH	XGI-CPUS
Current scan time	0.5ms	1.0ms	0.6ms	1.0ms	1.0ms	1.0ms
Min. scan time	0.4ms	0.9ms	0.6ms	1.0ms	10.ms	0.9ms
Max. scan time	0.8ms	1.2ms	0.9ms	1.6ms	2.4ms	2.3ms

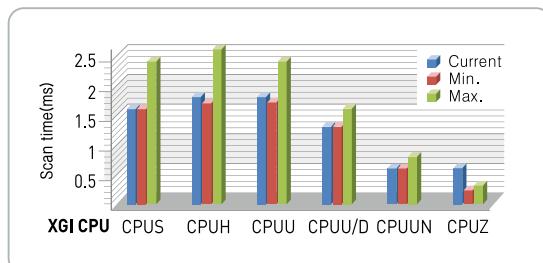


Device memory range

CPU	Device memory	Existing		New	
		A	M		
XGI CPUZ	A	-	-	1024KB(CPUZ3) 2048KB(CPUZ5) 4096KB(CPUZ7)	
	M	-	-	512KB(CPUZ3) 1024KB(CPUZ5) 2048KB(CPUZ7)	
XGI CPU	A	512KB		1024KB	
	M	256KB		512KB	
XGK CPU	P/M/K	32,768 point		65,5356 point	
	T	T000-T2047		T000-T8191	
	C/S/Z, R/ZR	2~8 times larger			

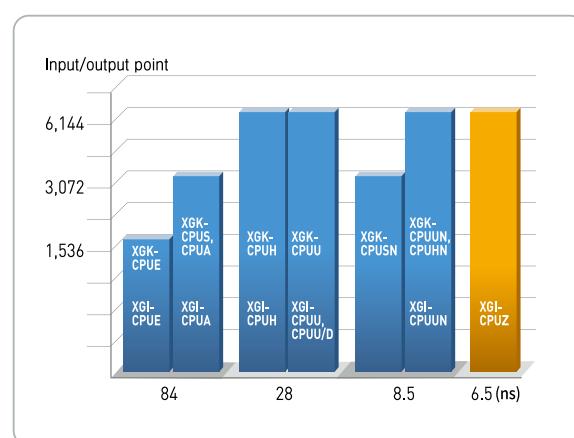

Easy connection

- Local ethernet connect with XG5000
- Program upload / download
- Set parameter

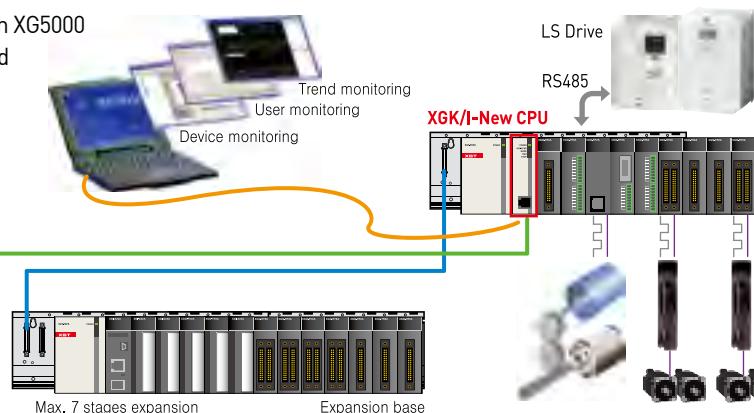

Engineering & Programming

Innovation Easy

Special Register

XGT series expand device memory and support advanced programming environment with Index register (Z), File register (U), and Analog register (U).



File register

As a non-volatile memory type, data are secured even in times of blackout or CPU reset.



Analog register



Assigning base, slot and memory buffer of an analog module to device, A/D conversion data can be accessed without analog commands.



Index register


Index register is used in the sequence program for array operation.

Example of Analog Register

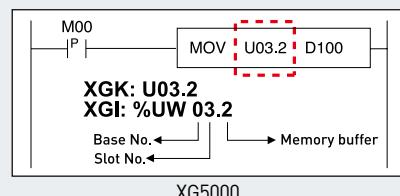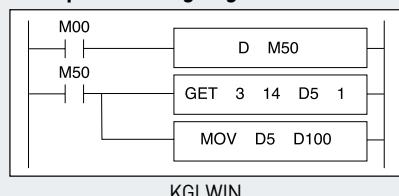

Analog Operation without Programming

Special module setup and operation is achieved by just parameter setting without additional program.



Set up high-speed



Set up analog module counter module


Program Modularization and Task Operation

Available to run multiful programs through medulization of scan programs based on functions and author, and to operate task programs triggered by specific conditions.


Program type	Description		Number
Scan program	Scan	Executed in every scan	256-task
	Initialization task	Executed only one time when power turns on	1
Task program	Time driven task	Executed with a constant time interval specified in parameter setting	32
	Internal task	Executed by internal condition	32
	External interrupt task	Executed by external interrupt input	32

IEC standard language (XGI): LD, SFC, ST

Ladder Diagram

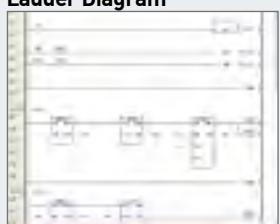

SFC


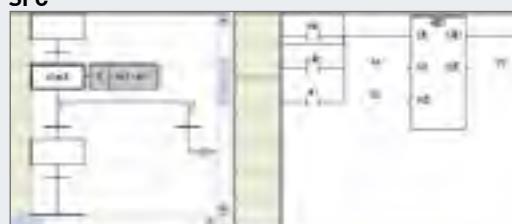


ST

ST features

- High-level Language
 - Fit for the complicate algorithm
 - Various open source (Compatibility)
 - Easy data processing
 - Convenient text editor

User defined Function block (XGI)

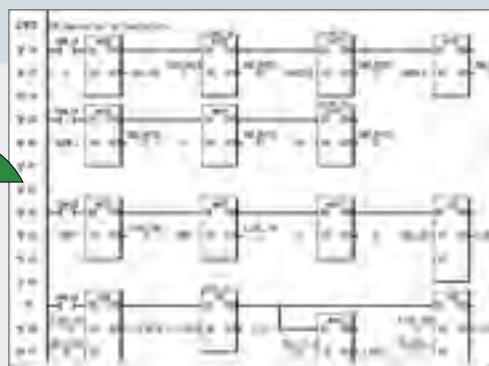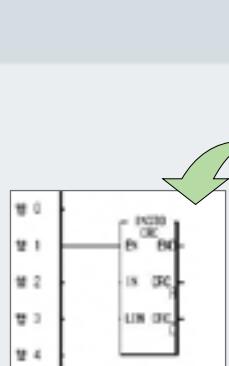

- Standardize the program using function or function block
 - Register the standardized program as a library file and reuse the library for another project





CPU & System Configuration

XGT series contain variety of CPU types for customized solutions which support wide coverage from small / middle- to large size-system control.

Contents 16 CPU module
25 I/O module



XGK CPU (LS Standard)

Premium CPU for high-speed and large scale application

**XGK-CPUUN**

- Program capacity: 256K steps
- I/O points: 6,144
- I/O device point: 65,536
(Remote I/O)
- Processing speed: 8.5ns/step

**XGK-CPUHN**

- Program capacity: 128K steps
- I/O points: 6,144
- I/O device point: 65,536
(Remote I/O)
- Processing speed: 8.5ns/step

**XGK-CPUSN**

- Program capacity: 64K steps
- I/O points: 3,072
- I/O device point: 65,536
(Remote I/O)
- Processing speed: 8.5ns/step

**XGK-CPUUU (Ultra capacity)**

- Program capacity: 128K steps
- I/O points: 6,144
- I/O device point: 32,768
(Remote I/O)
- Processing speed: 28ns/step

**XGK-CPUH (High performance)**

- Program capacity: 64K steps
- I/O points: 6,144
- I/O device point: 32,768
(Remote I/O)
- Processing speed: 28ns/step

**XGK-CPUA (Advanced)**

- Program capacity: 32K steps
- I/O points: 3,072
- I/O device point: 32,768
(Remote I/O)
- Processing speed: 28ns/step

General sequence controller PLC CPU

**XGK-CPUS (Standard)**

- Program capacity: 32K steps
- I/O points: 3,072
- I/O device point: 32,768
(Remote I/O)
- Processing speed: 84ns/step

**XGK-CPUE (Economic)**

- Program capacity: 16K step
- I/O point: 1,536
- I/O device point: 32,768
(Remote I/O)
- Processing speed: 84ns/step

XGI CPU (IEC Standard)

Premium CPU for high-speed and large scale application

**XGI-CPUZ**

- Program Capacity
- I/O points
- I/O device point
- Processing speed

**XGI-CPUUN**

- Program capacity: 2MBytes
- I/O points: 6,144
- I/O device point: 131,072
(Remote I/O)
- Processing speed: 8.5ns/step

**XGI-CPUU**

- Program capacity: 1MBytes
- I/O points: 6,144
- I/O device point: 131,072
(Remote I/O)
- Processing speed: 28ns/step

**XGI-CPUH**

- Program capacity: 512KBytes
- I/O points: 6,144
- I/O device point: 131,072
(Remote I/O)
- Processing speed: 28ns/step


**XGI-CPUS (IEC Standard)**

- Program capacity: 128KBytes
- I/O points: 3,072
- I/O device point: 32,768
(Remote I/O)
- Processing speed: 28ns/step


**XGI-CPUE (IEC Standard)**

- Program capacity: 64KBytes
- I/O points: 1,536
- I/O device point: 32,768
(Remote I/O)
- Processing speed: 84ns/step

CPU Module System composition

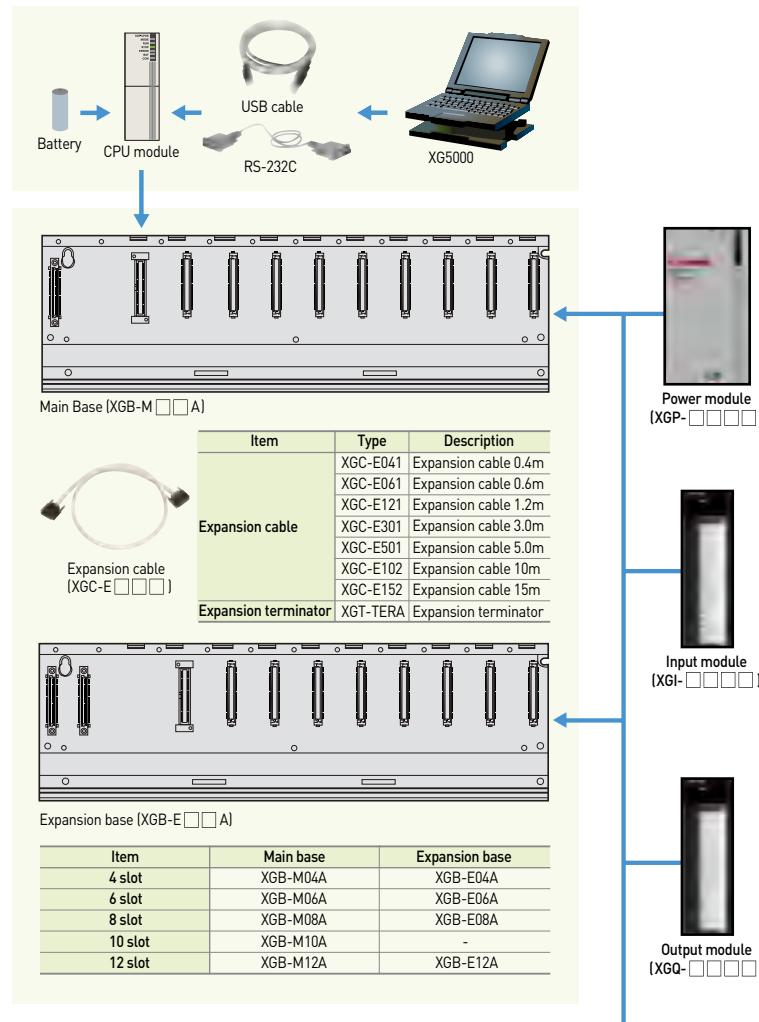

XG5000 Cable (RS-232C)

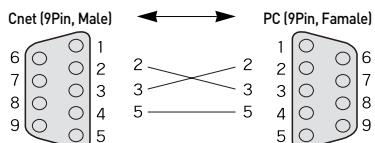

	CPU module	I/O point
XGK	XGK-CPUU,CPUU,CPUHN,CPUUN	6,144
	XGK-CPUS,CPUA,CUPSN	3,072
	XGK-CPUE	1,536
XGI	XGI-CPUUN,CPUU/D,CPUU,CPUH	6,144
	XGI-CPUS	3,072
	XGI-CPUE	1,536

CPU Connecting Cable

USB 301A	USB downloading cable
K1C-050A	RS-232C downloading cable

Item	Type	Description
USB cable	USB-301A	USB downloading cable
RS-232C cable	KIC-050A	RS-232C downloading cable

Item	Input module		
	AC110V	AC220V	DC24V
8 points	-	XGI-A21A	XGI-D21A
16 points	XGI-A12A	-	XGI-D22A
32 points	-	-	XGI-D24A
64 points	-	-	XGI-D28A

Power module		
XGP-ACF1	AC110/220V	DC5V 3A, DC24V 0.6A
XGP-ACF2	AC110/220V	DC5V 6A
XGP-AC23	AC220V	DC5V 8.5A
XGP-AC24	AC220V	DC5V 10A
XGP-DC42	DC24V	DC5V 6A

Item	Output module		
	Relay	Triac	Transistor
8 points	XGQ-RY1A	-	XGQ-TR1C
16 points	XGQ-RY2A	XGQ-SS2A	XGQ-TR2A
32 points	XGQ-RY2B	-	XGQ-TR2B
64 points	-	-	XGQ-TR4A
-	-	-	XGQ-TR4B
-	-	-	XGQ-TR8A
-	-	-	XGQ-TR8B

Special module		
XGF-AV8A	Voltage input type, 8Ch	
XGF-AC8A	Current input type, 8Ch	
XGF-AD8A	Voltage/ Current input, 8Ch	
XGF-AD4S	Voltage/ Current input, 4Ch [Isolated]	
XGF-AD16A	Voltage/ Current input, 16Ch	
XGF-AW4S	2-wire, Voltage/ Current input, 4Ch [Isolated]	

Analog input		
XGF-DV4A	Voltage output type, 4Ch	
XGF-DC4A	Current output type, 4Ch	
XGF-DV8A	Voltage output type, 8Ch	
XGF-DC8A	Current output type, 8Ch	
XGF-DV4S	Voltage output, 4Ch [Isolated]	
XGF-DC4S	Current output, 4Ch [Isolated]	
XGF-DA4S	Voltage/Current output, 4Ch [Isolated]	

Analog Output		
XGF-AH6A	Input: 4ch, Voltage/ Current	
	Output: 2Ch Voltage/ Current	
XGF-H02A	Pulse [OC] input type, 2Ch	
XGF-HD2A	Pulse [LD] input type, 2Ch	

Positioning		
XGF-P01H-P04H	Open collector, 1-4axes	
XGF-PD1H-PD4H	Line drive, 1-4axes	

Positioning (Network Type)		
XGF-PN8A	LS Standard EtherCAT Net. 8axes	
XGF-PN4B	Standard EtherCAT Net. 4axes	
XGF-PN8B	Standard EtherCAT Net. 8axes	

Motion Module		
XGF-M32E	Standard EtherCAT Net. 8axes	
XGF-XM32E	Standard EtherCAT Net. 16axes	

Temperature control		
XGF-TC4S	Thermocouple input, 4Ch	
XGF-RD4A	RTD input, 4Ch	
XGF-RD4S	RTD input, 4Ch [Insulated]	

Temperature controller		
XGF-TC4UD	Input: 4ch.(Voltage/Current, RTD/TC) Output: 8ch.[TR/Current] Controller: 4 loops	
XGF-TC4RT	Input: 4ch.(RTD) Output: 4ch.[TR] Controller: 4 loops	

Event input		
XGF-SOEA	DC24V, 32points	

Data log		
XGF-DL16A	USB2.0,CF2001,Max16Gbyte, 32 points 1 slot[Input 22 points, output 10 points]	

Communication module		
OPC UA	XGL-EOPCT	OPC UA, Twisted fair 2Ch
	XGL-EPMTB	Master/Client, Twisted fair 2ch.
	XGL-EFMFB	Master/Client, Fiber optic 2ch.
RAPIEnet+ - RAPIEnet v2 - EtherNet/IP - Modbus TCP/IP - Dedicated XGT Network	XGL-EFMHB	Master/Client, Twisted fair/fiber optic
	XGL-DBDT	Expansion driver - Twisted pair 2ch.
	XGL-DBDF	Expansion driver - Fiber optic 2ch.
	XGL-DBDH	Expansion driver - Fiber optic / Twisted pair
	XOL-ES4T	Stand alone switch twisted pair 4ch.
	XOL-ES4H	Stand alone switch twisted 2ch. fiber 2ch.
	XGL-EH5T	Open Ethernet switching hub
	XGL-CH2B	RS-232C 1ch, RS-422/485 1ch
	XGL-C22B	RS-232C 2ch
	XGL-C42B	RS-422/485 2ch
DeviceNet(Dnet)	XGL-DMEB	DeviceNet, Master
	XGL-DSEB	DeviceNet, Slave
Profibus-DP (Pnet)	XGL-PMEB	Profibus-DP, Master
	XGL-PSRA	Profibus-DP Slave, Remote interface
	XGL-PSEA	Profibus-DP Slave
Rnet	XGL-RMEB	Rnet, Master, TP
Fnet	GOL-RR8T	Rnet stand alone repeater hub
BACnet/IP	XGL-BIPT	BACnet client/server
	XGL-EIMT	RAPIEnet, Twisted fair 2Ch
RAPIEnet v1	XGL-EIMF	RAPIEnet, Fiber optic 2Ch
	XGL-EIMH	RAPIEnet, Twisted fair, Fiber optic
EtherNet/IP	XGL-EIPT	Industrial Ethernet, Twisted fair 2Ch

Specifications

Item	Description			Standard		
Ambient temperature	0 ~ 55 °C					
Storage temperature	-25 ~ +70 °C					
Ambient humidity	5 ~ 95%RH, (Non-condensing)					
Storage humidity	5 ~ 95%RH, (Non-condensing)					
Vibration resistance	Occasional vibration			-		
	Frequency	Acceleration	Pulse width			
	10 ≤ f < 57Hz	-	0.075mm			
	57 ≤ f < 150Hz	9.8m/s ² {1G}	-			
	Frequency	Acceleration	Pulse width			
	10 ≤ f < 57Hz	-	0.035mm			
	57 ≤ f < 150Hz	4.9m/s ² {0.5G}	-			
Shock resistance	• Peak acceleration: 147 m/s{15G} • Duration: 11ms • Half-sine, 3 times each direction per each axis			IEC 61131-2		
	Square wave impulse noise	± 1,500 V		LSIS Standard		
Noise resistance	Electrostatic discharge	± 4kV		IEC 61131-2, IEC 61000-4-2		
	Radiated electromagnetic field noise	27 ~ 500 MHz, 10 V/m		IEC 61131-2, IEC 61000-4-3		
	Fast transient / Burst noise	0.25kV		IEC 61131-2, IEC 61000-4-4		
Operating Ambience	Free from corrosive gases and excessive dust					
Altitude	Up to 2,000m					
Pollution degree	Less than equal to 2					
Cooling	Air-cooling					

* Pollution degree 2 is nonconductive pollution of the sort where occasionally a temporary conductivity caused by condensation must be expected.

XGK

Item	Description			Remarks
	XGK-CPUUN	XGK-CPUHN	XGK-CPUSN	
Operation method	Cyclic execution of stored program, Time-driven interrupt, Process-driven interrupt			
I/O control method	Batch processing by scan synchronization (Refresh), Direct input/output by instruction			
Program language	Ladder diagram, Instruction list, SFC[Sequential Function Chart], ST[Structured Text]			
Number of instructions	Basic	40		
	Application	700		
Processing speed	LD	0.0085μs/Step		
	MOVE	0.255μs/Step		
	Real number operation	±: 182.2ns {S}, 327.3ns {D} × : 336ns {S}, 427ns {D} ÷ : 345ns {S}, 808ns {D}		
Program capacity	256Kstep [2,048KB]	128Kstep [1,024KB]	64Kstep [512KB]	
I/O points (available to install)	6,144	6,144	3,072	
Data area	P	P00000 ~ P4095F{65,536 points }		
	M	M00000 ~ M4095F{65,536 points }		
	K	K00000 ~ K4095F{65,536 points }		
	L	L0000 ~ L11263F{180,224 points }		
	F	F0000 ~ F4095F{65,536 points }		
	T	100ms : T0000 - T2999 10ms : T3000 - T5999 1ms : T6000 - T7999 0.1ms : T8000 - T8191		Timer (Adjustable)
	C	C0000 ~ C4095		
	S	S00.00 ~ S255.99		
	D	D0000 ~ D524287	D0000 ~ D262143	
	U	U0.0-U7F.31	U0.0-U3F.31	Special module data refresh area
Z	256 points			
N	N00000 ~ N21503			
R	16 block	8 block	2 block	32K word per 1 block(R0 ~ R32767)
Flash area	2M byte, 32 blocks			Controllable by R device
Program type	Total program	256		
	Initialization	1 {_INT}		
	Time-driven	32		
	Internal	32		
Operation mode	RUN, STOP, DEBUG			
Self-diagnosis	Execution, Delay, Memory error, I/O error, Battery error, Power error			Modbus slave
Programming port	RS-232C {1Ch}, USB {1Ch}			
Data retention at power failure	Set "retain" at data declaration			
Max. expansion stage	7		3	Total length 15m
Current consumption (mA)	960			
Weight (Kg)	0.12			

XGK

Item		Description					Remarks				
		XGK-CPUU	XGK-CPUH	XGK-CPUA	XGK-CPUS	XGK-CPUE					
Operation method		Cyclic execution of stored program, Time-driven interrupt, Process-driven interrupt					-				
I/O control method		Batch processing by scan synchronization (Refresh), Direct input/output by instruction					-				
Program language		Ladder diagram, Instruction list, SFC[Sequential Function Chart], ST[Structured Text]					-				
Number of instructions	Basic	40					-				
	Application	700					-				
Processing speed	LD	0.028 μ s/Step		0.084 μ s/Step		-					
	MOVE	0.084 μ s/Step		0.252 μ s/Step		-					
Real number operation		$\pm : 0.602\mu$ s [S], 1.078 μ s [D] $\times : 1.106\mu$ s [S], 2.394 μ s [D] $\div : 1.134\mu$ s [S], 2.66 μ s [D]		$\pm : 1.442\mu$ s [S], 2.87 μ s [D] $\times : 1.948\mu$ s [S], 4.186 μ s [D] $\div : 1.442\mu$ s [S], 4.2 μ s [D]		S: Single real number D: Double real number					
		128Kstep(512KB) 64Kstep(256KB)		32Kstep(128KB)		16Kstep(64KB)					
Program capacity		6,144		3,072		1,536					
I/O points (available to install)											
Data area	P	P00000 ~ P2047F(32,768 points)									
	M	M00000 ~ M2047F(32,768 points)									
	K	K00000 ~ K2047F(32,768 points)									
	L	L0000 ~ L11263F(180,224 points)									
	F	F0000 ~ F2047F(32,768 points)									
	T	10ms : T1000 - T1499 1ms : T2000 - T2047		100ms : T0000 - T0999 1ms : T1500 - T1999		Change area is available by Parameter setting					
	C	C0000 ~ C2047									
	S	S00.00 ~ S127.99									
	D	D0000 ~ D32,767		D0000 ~ D19,999							
	U	U0.0~U7F.31		U0.0~U3F.31		U0.0~U3F.31					
	Z	128 points									
	N	N00000 ~ N21503									
	R	2 block		1 block		32Kword per 1 block(R0~R32767)					
Flash area		2M byte, 32 blocks									
Program type	Total program	256									
	Initialization	1 [INT]									
	Time-driven	32									
	Internal	32									
Operation mode		RUN, STOP, DEBUG									
Self-diagnosis		Execution, Delay, Memory error, I/O error, Battery error, Power error									
Programming port		RS-232C [1Ch], USB [1Ch]									
Data retention at power failure		Set "retain" at data declaration									
Max. expansion stage		7		3		1					
Current consumption (mA)		960		940							
Weight (Kg)		0.12									

XGI-CPUZ

Item	XGI-CPUZ7	XGI-CPUZ5	XGI-CPUZ3	Note	
Operation method	Main task/Cycle task: Fixed period and cyclic operation Initialization task: Only once at the time of entering the RUN				
Control cycle	Main task time: 1ms ~ 1,000ms (1ms unit setting) Cycle task time: Multiple setting of main task (2~4,000ms)				
I/O control method	Synchronism with main task cyclic (Refresh method)				
Program language	Ladder diagram SFC (Sequential Function Chart) ST (Structured Text), G code				
Calculation processing speed (Basic Instructions)	Default(LD)	6.5 ns/command		6.5 ns/command	
	MOVE	5.2 ns/command		5.2 ns/command	
	Real calculation	±: 31 ns (S), 121 ns (D) ×: 31 ns (S), 119 ns (D) ÷: 34 ns (S), 142 ns (D)			S: Short real D: Long real Maximum performance condition
Program memory	Capacity	10MB: sequence+motion 10MB: NC control	4MB: sequence+motion 5MB: NC control	2MB: sequence+motion 5MB: NC control	
	Quantity		Max. 256		
Configuration of program		Initial program, main task program, periodic task program, NC program			
I/O Point(Installation available)		6,144 points			
Max. I/O memory contact		131,072 points			
Command	Operator	18			
	Basic function	202			
	Basic function block	174			
	Expansion function block	Socket, file function block			
	Dedicated function block	Dedicated function blocks by special modules, dedicated function block for communication module (P2P)			
Data memory	Automatic variable(A)	4MB (2MB retain)	2MB (1MB retain)	1MB (512KB retain)	
	Input variable(I)		20KB		
	Output variable(Q)		20KB		
	Direct variable	M	2MB (1MB retain)	1MB (512KB retain)	512KB (256KB retain)
		R		64KB x 32 block	
	Flag variable	W	2MB		Same area as
		F	128KB		System flag
		K	18KB		PID operation area
		L	22KB		High speed link flag
		N	49KB		P2P parameter
U	8KB		Analog data refresh area		
FLASH area		4 MB, 64 block		Control by R device	
Timer		No restriction on points Time range: 0.001~4,294,967.295sec (1,193hour)		Occupying 20 Byte of automatic variable area per point	
Counter		No restriction on points Coefficient range: 64 bit range		Occupying 20 Byte of automatic variable area per point	
Operation mode		RUN, STOP			
Restart mode		Cold, Warm			
Self-diagnosis function		Cyclic error monitoring, time share over detection of task program, detection of operation delay, memory error, input and output error, power error, etc.			
How to preserve data in case of power failure		Retain area setting in basic parameters or retain setting when setting variables			
Maximum extension base		7			
Motion control	Real/Virtual axes	Axis 32	Axis 16	Axis 8	
	Dedicated virtual axis	Axis 4	Axis 2	Axis 1	
	Slave (Real axis)	64 Slave	32 Slave	16 Slave	
	Communication		EtherCAT (CoE: CANopen over EtherCAT, FoE: File Access over EtherCAT)		
	Communication period		Same as the main task cycle		
	Servo drive support		Servo drive to support EtherCAT CoE		
	Control unit		pulse, mm, inch, degree		
	Control method		Position/velocity/torque (Servo drive support), synchronous, interpolation control		
	Position address range		± LREAL, 0		
	Speed range		± LREAL, 0		

Item		XGI-CPUZ7	XGI-CPUZ5	XGI-CPUZ3	Note		
Motion control	Torque unit	Rated torque % designation					
	Acc./Dec. processing	Trapezoid type, S-type (Setting by specifying Jerk at a function block)					
	Rage of Acc./Dec.	+ LREAL ^{*note1)} , 0					
	Manual Operation	Manual operation					
	Cam operation	32 profiles/32,768 points	16 profiles/16,384 points	8 profiles/8,192 points			
	Absolute position system	Available (When using an absolute encoder type servo drive)					
	Communication	Protocol	EtherCAT				
		Support specification	CoE (CANopen over EtherCAT), FoE (File Access over EtherCAT)				
		Physical layer	100BASE-TX				
		Communication speed	100Mbps				
		Topology	Daisy chain				
		Communication cable	Cat. 5 STP (Shielded twisted-pair) cable				
		Synchronous jitter between slaves	Less than 1 μs				
		Constant period communication	PDO (Process Data Object) Mapping through CoE				
		Non-synchronous communication	SDO (Service Data Object) communication through CoE				
		Max.transmission distance	100 m				
		Indicates the communication status	Front LED				
External memory	External input/output (EtherCAT Remote I/O)	Max. 64 slave supported	Max. 32 slave supported	Max. 16 slave supported			
	Coordinate system function (Robot)	Support robot	Cartesian, delta				
		Setting	XG5000				
		Control language	Function Block				
Built-in communication port	Memory type	Micro SD/SDHC					
	File system	FAT32					
	Maximum capacity	Mountable maximum capacity: Up to 512GB					
	Service	Program back-up/restoration, booting operation					
Built-in communication port	USB device	Characteristics	USB2.0, 1ch				
		Service	Loader service (XG5000)				
	USB host	Characteristics	USB 2.0, 1ch				
		Service	Supported devices: Wi-Fi Dongle				
	Wi-Fi	Characteristics	IEEE 802.11b/g/n		USB Wi-Fi Dongle function Provided by		
		Service	Loader service (XG5000) Web Server				
	Ethernet	Characteristics	1 Port				
			100/1000BASE-TX				
			Auto negotiation (Full-duplex and half duplex)				
			Auto MDIX crossover				
			Up to 100M distance between nodes				
			Use UTP, STP, FTP cable				
			Service setting in local Ethernet parameter of XG5000				
			Loader service (XG5000) (Multi-connection support, up to 4 people including USB)	Remote relay service supported Remote access service not supported			
			XGT server - dedicated communication	TCP supported UDP not supported			
			Third-party protocol support (MODBUS TCP server) FTP server NTP client Web Server				
			Socket service (LS electric and third-party client service correspondence)	Socket function block			
Security		Project password TLS support: Loader service, Web server, FTP server					
Screen display		Character display					
Internal consumption current		1.3A					
Weight		230g					

*Note1) LREAL range: 2.2250738585072e-308 ~ 1.79769313486232e+308

Long real number(+LREAL) positive range: 0 < x ≤ 1.79769313486232e+308

XGI

Item	XGI-CPUUN	XGI-CPUU/D	XGI-CPUU	XGI-CPUH	XGI-CPUS	XGI-CPUE	Remarks																																																																																								
Operation system	Reiterative operation, fixed cycle operation, constant scan																																																																																														
I/O Control system	Scan synchronous batch processing system(refresh system), direct system by command																																																																																														
Program language	Ladder Diagram, SFC (Sequential Function Chart), ST (Structured Text)																																																																																														
Operation processing speed (basic command)	<table border="1"> <tr><td>Operator</td><td>18</td></tr> <tr><td>Basic function</td><td>136 types + real number operation function</td></tr> <tr><td>Basic function block</td><td>43</td></tr> <tr><td>Dedicated function block</td><td>Dedicated function blocks by special function modules, communication dedicated function block(P2P)</td></tr> <tr><td>Basic</td><td>0.0085μs /step</td><td>0.028μs /step</td><td>0.084μs /step</td><td></td><td></td><td></td><td></td></tr> <tr><td>MOVE</td><td>0.255μs /step</td><td>0.084μs /step</td><td>0.252μs /step</td><td></td><td></td><td></td><td></td></tr> <tr><td>Real number operation</td><td> $\pm : 0.119\mu$s[S], 0.281μs[D] $\times : 0.272\mu$s[S], 0.680μs[D] $\div : 0.281\mu$s[S], 0.685μs[D] </td><td> $\pm : 0.392\mu$s[S], 0.924μs[D] $\times : 0.896\mu$s[S], 2.240μs[D] $\div : 0.924\mu$s[S], 2.254μs[D] </td><td> $\pm : 1.442\mu$s[S], 2.87μs[D] $\times : 1.948\mu$s[S], 4.186μs[D] $\div : 1.442\mu$s[S], 4.2μs[D] </td><td></td><td></td><td></td><td>S: Single real number D: Double real number</td></tr> </table>							Operator	18	Basic function	136 types + real number operation function	Basic function block	43	Dedicated function block	Dedicated function blocks by special function modules, communication dedicated function block(P2P)	Basic	0.0085 μ s /step	0.028 μ s /step	0.084 μ s /step					MOVE	0.255 μ s /step	0.084 μ s /step	0.252 μ s /step					Real number operation	$\pm : 0.119\mu$ s[S], 0.281μ s[D] $\times : 0.272\mu$ s[S], 0.680μ s[D] $\div : 0.281\mu$ s[S], 0.685μ s[D]	$\pm : 0.392\mu$ s[S], 0.924 μ s[D] $\times : 0.896\mu$ s[S], 2.240 μ s[D] $\div : 0.924\mu$ s[S], 2.254 μ s[D]	$\pm : 1.442\mu$ s[S], 2.87μ s[D] $\times : 1.948\mu$ s[S], 4.186μ s[D] $\div : 1.442\mu$ s[S], 4.2μ s[D]				S: Single real number D: Double real number																																																								
Operator	18																																																																																														
Basic function	136 types + real number operation function																																																																																														
Basic function block	43																																																																																														
Dedicated function block	Dedicated function blocks by special function modules, communication dedicated function block(P2P)																																																																																														
Basic	0.0085 μ s /step	0.028 μ s /step	0.084 μ s /step																																																																																												
MOVE	0.255 μ s /step	0.084 μ s /step	0.252 μ s /step																																																																																												
Real number operation	$\pm : 0.119\mu$ s[S], 0.281μ s[D] $\times : 0.272\mu$ s[S], 0.680μ s[D] $\div : 0.281\mu$ s[S], 0.685μ s[D]	$\pm : 0.392\mu$ s[S], 0.924 μ s[D] $\times : 0.896\mu$ s[S], 2.240 μ s[D] $\div : 0.924\mu$ s[S], 2.254 μ s[D]	$\pm : 1.442\mu$ s[S], 2.87μ s[D] $\times : 1.948\mu$ s[S], 4.186μ s[D] $\div : 1.442\mu$ s[S], 4.2μ s[D]				S: Single real number D: Double real number																																																																																								
Program memory capacity	2M	1M	512KB	128KB	64KB																																																																																										
I/O points (installable)	6,144 points			3,072 points	1,536 points																																																																																										
Max. I/O memory contact	131,072 points					32,768 points																																																																																									
Data memory	<table border="1"> <tr><td>Symbolic variable area(A)</td><td>1024KB (max. 512KB retain settable)</td><td>512KB (max. 256KB retain settable)</td><td>128KB (max. 64KB retain settable)</td><td>64KB (max. 32KB retain settable)</td><td></td><td></td><td></td></tr> <tr><td>I variable(I)</td><td colspan="5">16KB</td><td>4KB</td><td></td></tr> <tr><td>Q variable(Q)</td><td colspan="5">16KB</td><td>4KB</td><td></td></tr> <tr><td>Direct variable</td><td>M</td><td>512KB (max. 256KB retain settable)</td><td>256KB (max. 128KB retain settable)</td><td>64KB (max. 32KB retain settable)</td><td>32KB (max. 16KB retain settable)</td><td></td><td></td></tr> <tr><td></td><td>R</td><td>64KB × 16block</td><td>64KB × 2block</td><td>64KB × 1block</td><td>32KB × 1block</td><td></td><td></td></tr> <tr><td></td><td>W</td><td>1,024KB</td><td>128KB</td><td>64KByte</td><td>32KByte</td><td>R</td><td></td></tr> <tr><td>Flag variable</td><td>F</td><td>8KB</td><td colspan="4">4KB</td><td>System flag</td></tr> <tr><td></td><td>K</td><td colspan="3">16KB</td><td colspan="2" rowspan="3">4KB</td><td>PID flag</td></tr> <tr><td></td><td>L</td><td colspan="5">22KB</td><td>High speed link flag</td></tr> <tr><td></td><td>N</td><td colspan="5">42KB</td><td>P2P Parameters</td></tr> <tr><td></td><td>U</td><td colspan="2" rowspan="4">8KB</td><td>4KB</td><td>2KB</td><td></td><td>Analog data Refresh</td></tr> </table>							Symbolic variable area(A)	1024KB (max. 512KB retain settable)	512KB (max. 256KB retain settable)	128KB (max. 64KB retain settable)	64KB (max. 32KB retain settable)				I variable(I)	16KB					4KB		Q variable(Q)	16KB					4KB		Direct variable	M	512KB (max. 256KB retain settable)	256KB (max. 128KB retain settable)	64KB (max. 32KB retain settable)	32KB (max. 16KB retain settable)				R	64KB × 16block	64KB × 2block	64KB × 1block	32KB × 1block				W	1,024KB	128KB	64KByte	32KByte	R		Flag variable	F	8KB	4KB				System flag		K	16KB			4KB		PID flag		L	22KB					High speed link flag		N	42KB					P2P Parameters		U	8KB		4KB	2KB		Analog data Refresh
Symbolic variable area(A)	1024KB (max. 512KB retain settable)	512KB (max. 256KB retain settable)	128KB (max. 64KB retain settable)	64KB (max. 32KB retain settable)																																																																																											
I variable(I)	16KB					4KB																																																																																									
Q variable(Q)	16KB					4KB																																																																																									
Direct variable	M	512KB (max. 256KB retain settable)	256KB (max. 128KB retain settable)	64KB (max. 32KB retain settable)	32KB (max. 16KB retain settable)																																																																																										
	R	64KB × 16block	64KB × 2block	64KB × 1block	32KB × 1block																																																																																										
	W	1,024KB	128KB	64KByte	32KByte	R																																																																																									
Flag variable	F	8KB	4KB				System flag																																																																																								
	K	16KB			4KB		PID flag																																																																																								
	L	22KB					High speed link flag																																																																																								
	N	42KB					P2P Parameters																																																																																								
	U	8KB		4KB	2KB		Analog data Refresh																																																																																								
Flash area	2MB, 32block																																																																																														
Timer	No point limit Time range: 0.001~ 4,294,967.295 second(1,193 hours)																																																																																														
Counter	No point limit Coefficient range : 64 bit expression																																																																																														
Program structure	Total no. of programs	256																																																																																													
	Initialization task	1																																																																																													
	Fixed cycle task	32																																																																																													
	Internal device task	32																																																																																													
Operation mode	RUN, STOP, DEBUG																																																																																														
Restart mode	Cold, Warm																																																																																														
Self diagnosis	Operation delay monitoring, memory fault, I/O fault, battery fault, power fault and etc																																																																																														
Data protection in case of power failure	Retain area setting by basic parameters																																																																																														
Max. base extension	7			3	1	Total length 15m																																																																																									
Current consumption (mA)	960mA			940mA																																																																																											
Weight (kg)	0.12kg																																																																																														

XGK/XGI
CPU built-in
Ethernet
specification

Item	XGK-CPUSN, CPUHN, CPUUN / XGI-CPUUN	Remarks
Ethernet Feature	1 Port	-
	10/100BASE-TX	-
	Auto negotiation (Full-duplex and half duplex)	-
	Auto MDIX Crossover	-
	Max. Support 4 channel	Support 8Kbyte each send and receive channel
	Max. Distance between nodes : 100m	-
	Max. Protocol size : 1500Byte	IP Fragmentation is not supported.
Ethernet Service	Cable	UTP, STP, FTP cables is available Setting communication parameters with XG5000
	Service	Loader service (XG5000 connection) supported LS protocol(XGT) supported.
		Remote stage 1 connection with PLC is available Other company's protocol (Modbus TCP/IP) supported
		Server & TCP supported. Client & UDP not supported.

XGK system configuration

Item	XGK-CPUE	XGK-CPUS, CPUSN	XGK-CPUA	XGK-CPUH, CPUHN	XGK-CPUU, CPUUN																																																																
Max. expansion stage	1 Stage	3 Stage	3 Stage	7 Stage	7 Stage																																																																
Max. installation of module	24 Module	48 Module	48 Module	96 Module	96 Module																																																																
Max. number of I/O point	1,536 Points	3,072 Points	3,072 Points	6,144 Points	6,144 Points																																																																
Max. expansion distance			15m																																																																		
Assignment of I/O number (Fixed)		<ul style="list-style-type: none"> 64 points are assigned to each slot of base regardless of installation of module. I/O numbers equivalent to 12 slots are assigned to a base. The starting number of base 0 is P0000. <p>Refer to the following figure regarding the I/O number assignment of 12 slots</p> <table border="1"> <thead> <tr> <th>Slot number:</th><th>0</th><th>1</th><th>2</th><th>3</th><th>4</th><th>5</th><th>6</th><th>7</th><th>8</th><th>9</th><th>10</th><th>11</th><th>32 points</th> </tr> <tr> <th>Power</th><th>CPU</th><th>16 points</th><th>16 points</th><th>32 points</th><th>64 points</th><th>16 points</th><th>32 points</th><th>32 points</th><th>64 points</th><th>32 points</th><th>16 points</th><th>32 points</th><th>32 points</th> </tr> </thead> <tbody> <tr> <td>P00</td><td>P40</td><td>P80</td><td>P120</td><td>P160</td><td>P200</td><td>P240</td><td>P280</td><td>P320</td><td>P360</td><td>P400</td><td>P440</td><td>P480</td> </tr> <tr> <td>-</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td> </tr> <tr> <td>P2F</td><td>P7F</td><td>P11F</td><td>P15F</td><td>P19F</td><td>P23F</td><td>P27F</td><td>P31F</td><td>P35F</td><td>P39F</td><td>P43F</td><td>P47F</td><td>P51F</td> </tr> </tbody> </table>	Slot number:	0	1	2	3	4	5	6	7	8	9	10	11	32 points	Power	CPU	16 points	16 points	32 points	64 points	16 points	32 points	32 points	64 points	32 points	16 points	32 points	32 points	P00	P40	P80	P120	P160	P200	P240	P280	P320	P360	P400	P440	P480	-	-	-	-	-	-	-	-	-	-	-	-	-	P2F	P7F	P11F	P15F	P19F	P23F	P27F	P31F	P35F	P39F	P43F	P47F	P51F
Slot number:	0	1	2	3	4	5	6	7	8	9	10	11	32 points																																																								
Power	CPU	16 points	16 points	32 points	64 points	16 points	32 points	32 points	64 points	32 points	16 points	32 points	32 points																																																								
P00	P40	P80	P120	P160	P200	P240	P280	P320	P360	P400	P440	P480																																																									
-	-	-	-	-	-	-	-	-	-	-	-	-																																																									
P2F	P7F	P11F	P15F	P19F	P23F	P27F	P31F	P35F	P39F	P43F	P47F	P51F																																																									
I/O assignment (Variable)		<ul style="list-style-type: none"> I/O point is assigned automatically according to the installed module. I/O parameter is used to install modules. The starting number of base 0 is P0000. 16 points are assigned automatically to the slot of special or communication module <p>Refer to the following figure regarding the I/O number assignment of 12 slots</p> <table border="1"> <thead> <tr> <th>Slot number:</th><th>0</th><th>1</th><th>2</th><th>3</th><th>4</th><th>5</th><th>6</th><th>7</th><th>8</th><th>9</th><th>10</th><th>11</th><th>32 points</th> </tr> <tr> <th>Power</th><th>CPU</th><th>16 points</th><th>16 points</th><th>32 points</th><th>64 points</th><th>16 points</th><th>32 points</th><th>32 points</th><th>64 points</th><th>32 points</th><th>16 points</th><th>32 points</th><th>32 points</th> </tr> </thead> <tbody> <tr> <td>P00</td><td>P10</td><td>P20</td><td>P40</td><td>P80</td><td>P90</td><td>P110</td><td>P130</td><td>P170</td><td>P190</td><td>P200</td><td>P220</td><td>P240</td> </tr> <tr> <td>-</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td> </tr> <tr> <td>P0F</td><td>P1F</td><td>P2F</td><td>P7F</td><td>P8F</td><td>P10F</td><td>P12F</td><td>P14F</td><td>P18F</td><td>P19F</td><td>P21F</td><td>P22F</td><td>P51F</td> </tr> </tbody> </table>	Slot number:	0	1	2	3	4	5	6	7	8	9	10	11	32 points	Power	CPU	16 points	16 points	32 points	64 points	16 points	32 points	32 points	64 points	32 points	16 points	32 points	32 points	P00	P10	P20	P40	P80	P90	P110	P130	P170	P190	P200	P220	P240	-	-	-	-	-	-	-	-	-	-	-	-	-	P0F	P1F	P2F	P7F	P8F	P10F	P12F	P14F	P18F	P19F	P21F	P22F	P51F
Slot number:	0	1	2	3	4	5	6	7	8	9	10	11	32 points																																																								
Power	CPU	16 points	16 points	32 points	64 points	16 points	32 points	32 points	64 points	32 points	16 points	32 points	32 points																																																								
P00	P10	P20	P40	P80	P90	P110	P130	P170	P190	P200	P220	P240																																																									
-	-	-	-	-	-	-	-	-	-	-	-	-																																																									
P0F	P1F	P2F	P7F	P8F	P10F	P12F	P14F	P18F	P19F	P21F	P22F	P51F																																																									


XGI system configuration

Item	XGI-CPUU, CPUH, CPUU/D, CPUUN	XGI-CPUS	XGI-CPUE																																																																																				
Max. expansion stage	7 Stage	3 Stage	1 Stage																																																																																				
Max. installation of module	96 Module	48 Module	24 Module																																																																																				
Max. number of I/O point	16 point : 1,536 Points 32 point : 3,072 Points 64 point : 6,144 Points	16 point : 768 Points 32 point : 1,536 Points 64 point : 3,072 Points	16 point : 384 Points 32 point : 768 Points 64 point : 1,536 Points																																																																																				
Max. expansion distance		15m																																																																																					
I/O assignment		<ul style="list-style-type: none"> 64 points are assigned to each slot of base regardless of installation of module. No limit in installation of special module Special module is controlled by function block and the memory assignment is done automatically <p>Refer to the following figure regarding the I/O assignment of 12 slots</p> <table border="1"> <thead> <tr> <th>Slot number:</th><th>0</th><th>1</th><th>2</th><th>3</th><th>4</th><th>5</th><th>6</th><th>7</th><th>8</th><th>9</th><th>10</th><th>11</th><th>32 points</th> </tr> <tr> <th>Power</th><th>CPU</th><th>16 points</th><th>16 points</th><th>32 points</th><th>64 points</th><th>16 points</th><th>32 points</th><th>32 points</th><th>64 points</th><th>32 points</th><th>16 points</th><th>32 points</th><th>32 points</th> </tr> </thead> <tbody> <tr> <td>% I x 0.8.0-31</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>%Qx 0.9.0-15</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>%Qx 0.10.0-31</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>%Qx 0.11.0-31</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> </tbody> </table>	Slot number:	0	1	2	3	4	5	6	7	8	9	10	11	32 points	Power	CPU	16 points	16 points	32 points	64 points	16 points	32 points	32 points	64 points	32 points	16 points	32 points	32 points	% I x 0.8.0-31														%Qx 0.9.0-15														%Qx 0.10.0-31														%Qx 0.11.0-31														
Slot number:	0	1	2	3	4	5	6	7	8	9	10	11	32 points																																																																										
Power	CPU	16 points	16 points	32 points	64 points	16 points	32 points	32 points	64 points	32 points	16 points	32 points	32 points																																																																										
% I x 0.8.0-31																																																																																							
%Qx 0.9.0-15																																																																																							
%Qx 0.10.0-31																																																																																							
%Qx 0.11.0-31																																																																																							

CPU

Expansion system composition

1. The following figure is the example of expansion system with the fixed I/O point type of XGK-CPUH.
2. The address of I/O point is adjustable by XG5000 parameter.

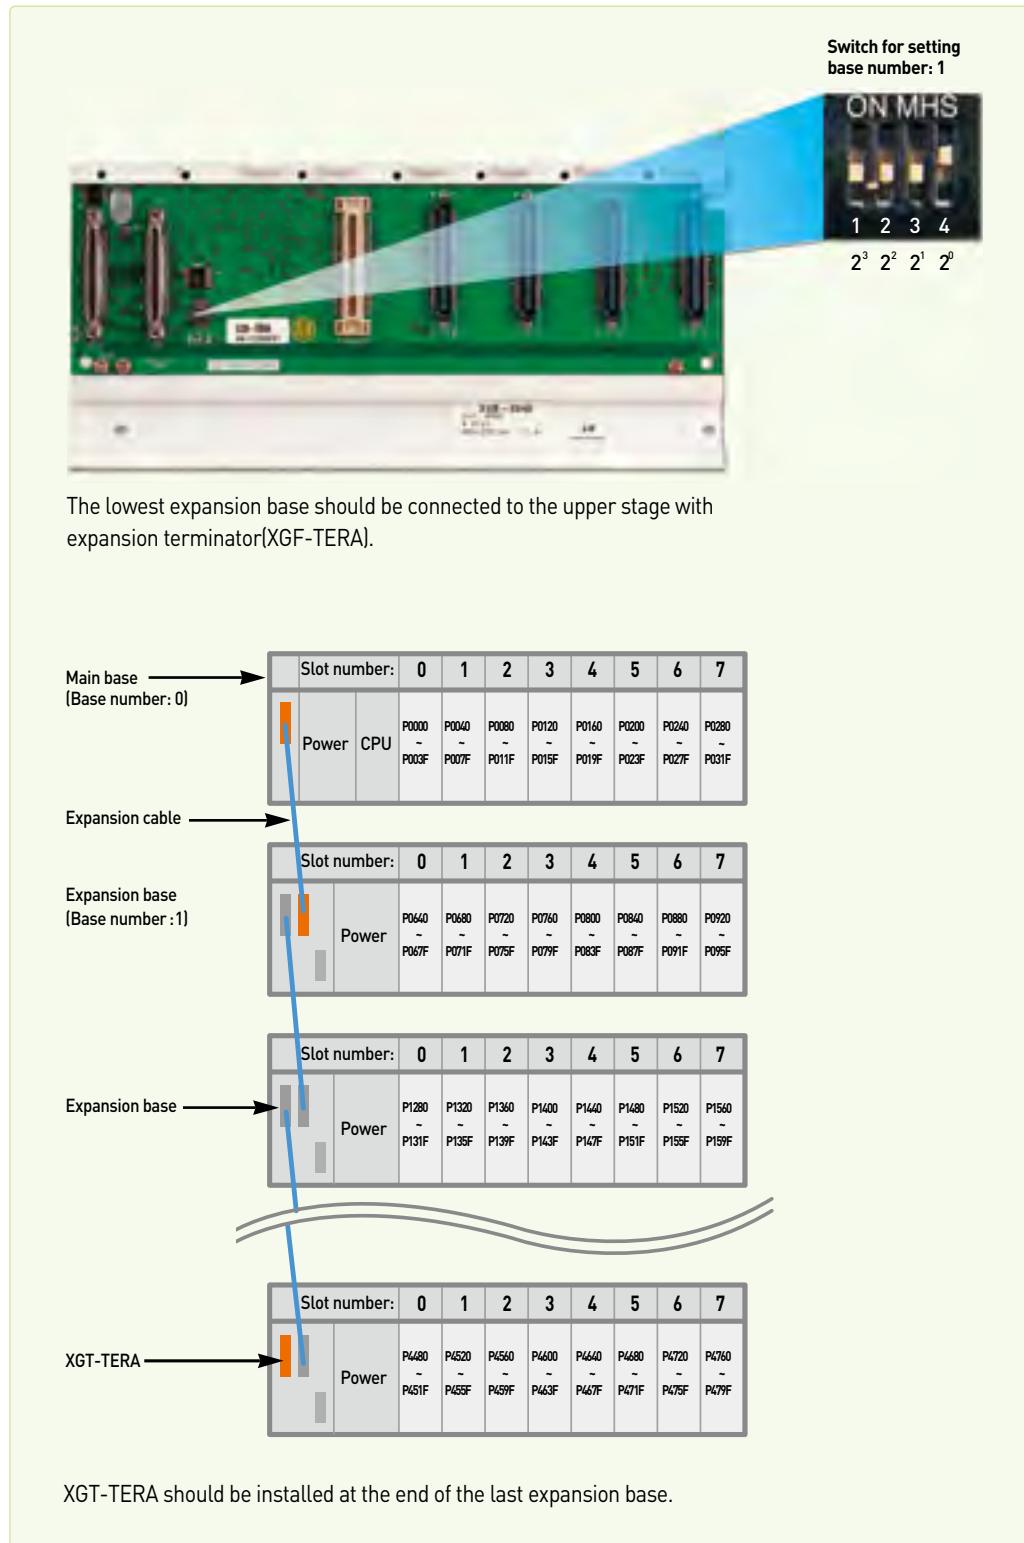

Features

- 8, 16, 32, 64 points I/O module
- Operation monitoring by LED display
- Easy maintenance: Terminal block type, one-touch installation of module



CPU

Input module specifications

Item		DC input						AC input		
Type	XGI-D21A	XGI-D22A	XGI-D22B	XGI-D24A	XGI-D24B	XGI-D28A	XGI-D28B	XGI-A12A	XGI-A21A	XGI-A21C
Input point	8	16		32		64		16	8	8
Rated input voltage				DC24V				AC100-120V	Free voltage	DC100/240V
Rated input current					4mA			8mA	17mA	17mA
ON voltage/current				19V or more / 3mA or less				AC80V or more / 5mA or less	AC130V or more / 10mA or less	AC80V or more / 5mA or less
OFF voltage/current				DC11V or more / 1.7mA or less				AC80V or more / 5mA or less	AC60V or more / 2mA or less	AC30V or more / 1mA or less
Response	Off→On	1ms/5ms/10ms/20ms/70ms (set by CPU parameter) Initial value: 3ms						15mA or less		
	On→Off	1ms/5ms/10ms/20ms/70ms (set by CPU parameter) Initial value: 3ms						25mA or less		
Common (COM)	8 points/COM	16 points/COM			32 points/COM			16 points/COM	8 points/COM	1 points/COM
Insulation method	Photocoupler						Photocoupler			
Current consumption (mA)	20	30		50		60		30	20	20
Weight (Kg)	0.1	0.12		0.1		0.15		0.13	0.13	0.13

Output module specifications












Item		Relay			Transistor			Triac				
Type		XGQ-RY1A	XGQ-RY2A	XGQ-RY2B	XGQ-TR1C	XGQ-TR2A	XGQ-TR2B	XGQ-TR4A	XGQ-TR4B	XGQ-TR8A	XGQ-TR8B	XGQ-SS2A
Ouput point		8	16		8	16		32		64		16
Rated input voltage		DC12/24V, AC110/220V					DC12/24V				AC110/220V	
Rated input current	1 Point	2A		2A	0.5A	0.1A			0.6A			
	Common	5A		0.1A	4A	2A			4A			
Response time	Off→On	10ms or less		3ms or less		1ms or less			1ms or less			
	On→Off	12ms or less		10ms or less		1ms or less			0.5cycle +1ms or less			
Common (COM)	1 point/COM	16 points/COM	1 points/COM		32 points/COM				16 points/COM			
Insulation method	Relay			Photocoupler								
Current consumption (mA)	260	500		100	70	130		230		300		
Weight (Kg)	0.13	0.17	0.19	0.11	0.11	0.1		0.15		0.2		
Surge killer	-	Varistor			Zener diode			Varistor				
External power supply	-		DC12/24V			DC			-			

Note] B1, B2 of 32, 62 points terminal [connector] are shorted inside of the product.

Wiring diagram for input modules

XGI-D21A	XGI-D22A	XGI-D22B	XGI-D24A
XGI-D24B	XGI-D28A	XGI-D28B	
XGI-A12A	XGI-A21A	XGI-A21C	


Wiring diagram for output modules

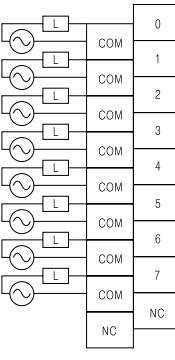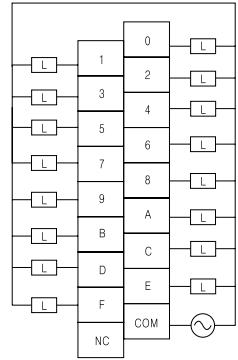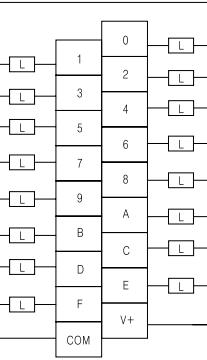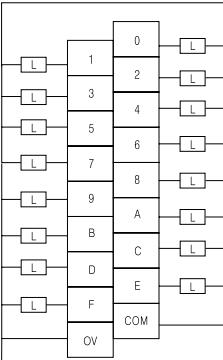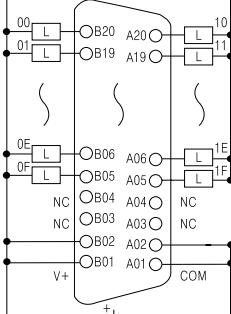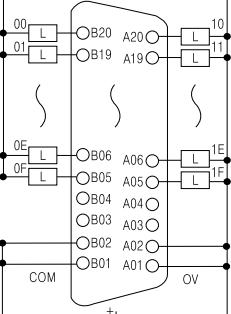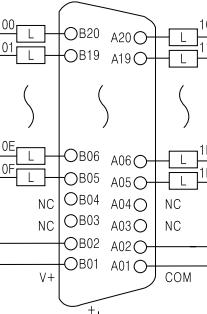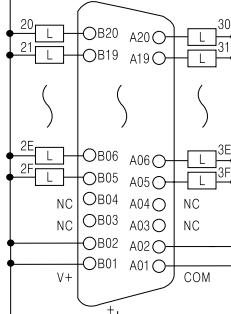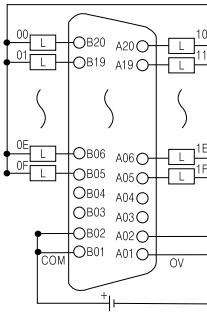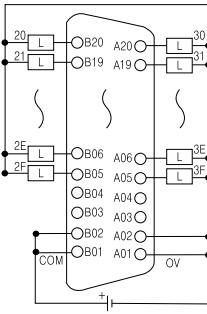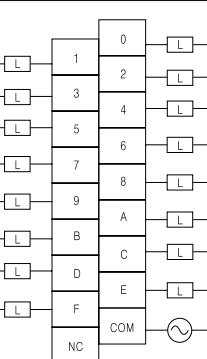XGQ-RY1A	XGQ-RY2A/B	XGQ-TR2A	XGQ-TR2B
			
XGQ-TR4A	XGQ-TR4B	XGQ-TR8A	
			
XGQ-TR8B	XGQ-SS2A	XGF-TR1C	
			


CPU

Diagnostic Digital Input Module(XGI-D21D)

- Diagnostic Digital Input module receives and processes DC 24V input signal.
It has a wire break detection function of each input signal.
- Input signal and wire break detection signal are displayed on the device
of the CPU module, it can be used in the PLC program.

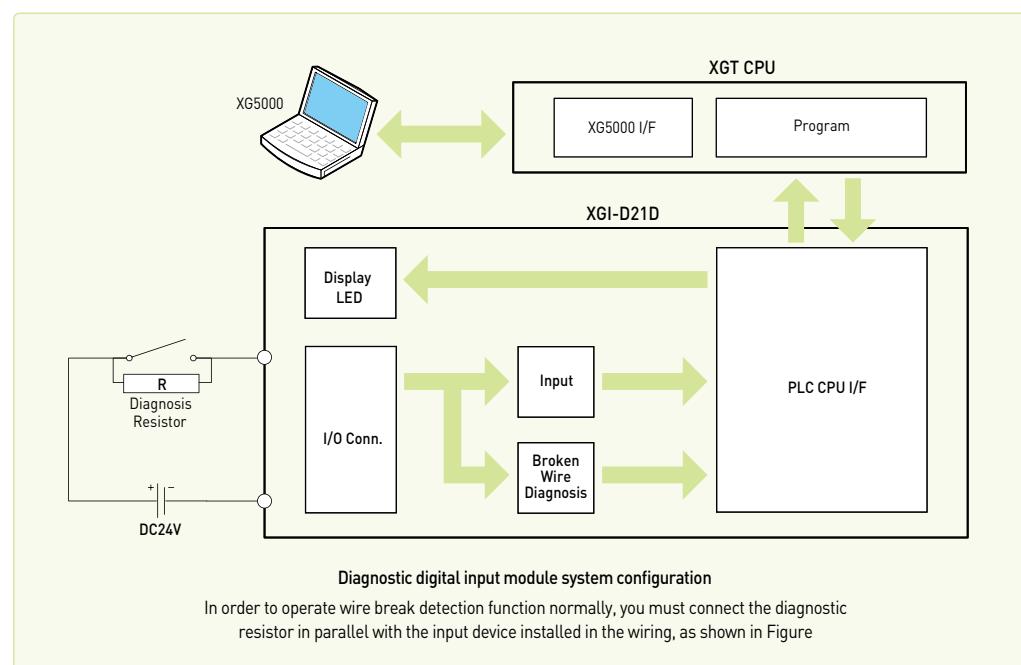

Specifications

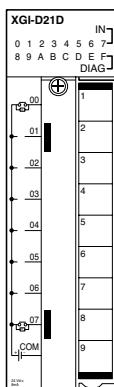


IN: Input status(0-7)

- On: Input On
- Off: Input Off
- DIAG: Diagnosis status(8-F)
- On: broken wire occurs
- Off: Normal state


Item		Specifications
Input point		8 points
Insulation method		Photo coupler insulation
Rated input voltage / current		DC24V / Approx. 8mA
Voltage range		DC20.4~28.8V (5% and lower ripple rate)
On voltage / On current		19V and higher / 5.2mA and higher
Off voltage / On current		11V and lower / 4.7mA and lower
Response time	Off → On (Input filter)	1ms/3ms/5ms/10ms/20ms/70ms/100ms, Initial value:3ms
	On → Off	1ms/3ms/5ms/10ms/20ms/70ms/100ms, Initial value:3ms
Insulation withstand voltage		DC 500V
Insulation resistance		10 ¹¹ and higher by Insulation ohmmeter
Diagnosis function		Wire break detection
Common method		8 point / 1COM
Suitable cable size		Stranded cable between 0.3-0.75mm ² (2.8mm and smaller outer dia.)
Suitable clamped terminal		R1.25-3 (Sleeve built-in clamped terminal is not available)
Current consumption(mA)		60mA
Operation display		LED On with input On LED On during wire break
External connection method		9 point Terminal strip connector (M3 X 6 screws)
Weight		95g

Diagnostic Digital Output Module(XGQ-RY1D)

- Diagnostic digital output module outputs output signal via the relay to the outside.
It has a diagnostic function of the internal signal and wire break detection for each output signal.
- Diagnostic signals are displayed on the device of the CPU module, it can be used in the PLC program.

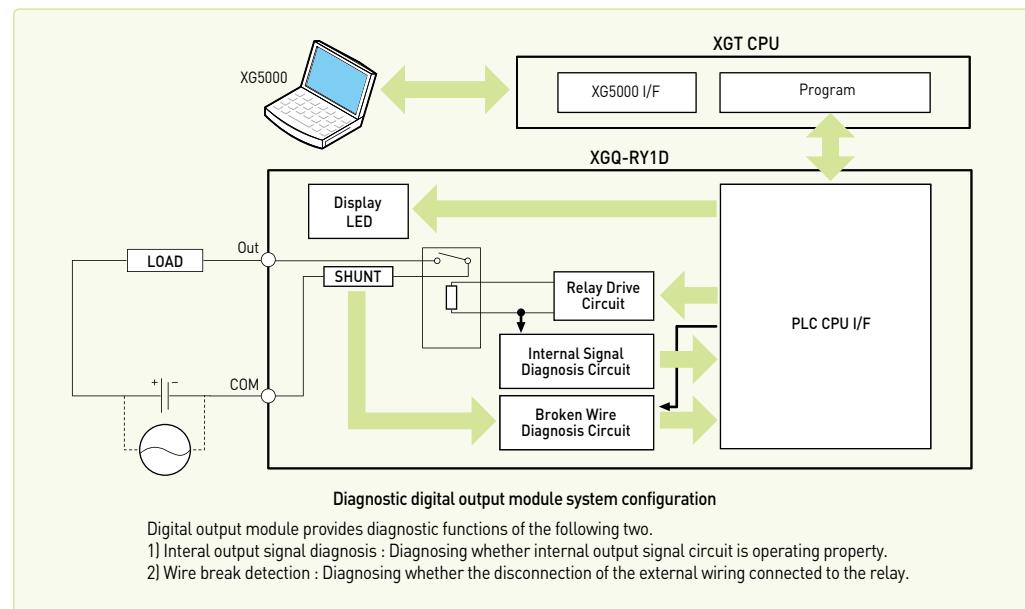

Specifications

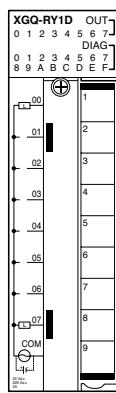

- OUT:** Output status [0 ~ 7]
- On: Relay output On
 - Off: Relay output Off
- DIAG :** Diagnosis status
Internal output signal diagnosis [0 ~ 7]
- On: Internal output signal fail
 - Off: Normal state
- Wire break detection(8~F)**
- On: broken wire occurs
 - Off: Normal state


Item		Specifications
Output point		8 points
Insulation method		Relay insulation Photo coupler insulation
Rated load voltage		DC24V (resistance load) / AC220V [$\cos \phi = 1$]
Rated load current	1point	2A
	Common	5A
Min. load voltage / current		DC5V / 1mA
Max. load voltage / current		AC250V, DC125V / 2A
Leakage current at Off		0.1mA (AC220V, 60Hz)
Max. switching frequency		1,800 times/hour
Surge killer		None
Life	Mechanical	20 million and more times
	Electrical	Rated load voltage/current 100 thousand and more times
		AC200V / 1.5A, AC240V / 1A [$\cos \phi = 0.7$] 100 thousand and more times
		AC200V / 1A, AC240V / 0.5A [$\cos \phi = 0.35$] 100 thousand and more times
Response time	Off → On	10ms and lower
	On → Off	12ms and lower
Diagnosis function		Wire break detection Internal output signal diagnosis
Common method		8 point/1COM
Current consumption(mA)		Max. 400mA
Operation display		LED On with output On LED On during wire break LED On when the internal output signal fail
External connection method		9 point Terminal strip connector (M3 X 6 screws)
Weight		145g

CPU

Input/output mixed Type (XGH-DT4A)

Input		Output			
Input points	16 points	Input points	16 points		
Insulation method	Photo coupler	Insulation method	Photo coupler		
Rated input voltage	DC24V	Rated input voltage	DC12/24V		
Rated input current	4mA	Rated input current	DC10.2~26.4V		
Input voltage range	DC20.4~28.8V	Input voltage range	0.1A/point, 1.6A/COM		
Insulation pressure	AC560Vrms / 3Cycle	Insulation pressure	0.1mA or less		
On voltage/current	DC19V or more / 3mA or more	On voltage/current	0.7A/10ms or less		
Off voltage/current	DC11V or more / 1.7mA or more	Off voltage/current	Zener diode		
Input resistance	5.6 Ω	Input resistance	DC 0.2V or less		
Response	Off → On [Setting by CPU parameter] Initial value: 3ms	Off → On	1ms or less		
On → Off	1ms/3ms/5ms/10ms/20ms/70ms/100ms [Setting by CPU parameter] Initial value: 3ms	On → Off	1ms or less (rated load, resistance load)		
Common (COM)	16 points/COM				
Operation display	LED lighting when output is ON				
Internal current consumption	100mA				
External connection	40-point connector				
Weight (kg)	0.1				


Wiring diagram for mixed type

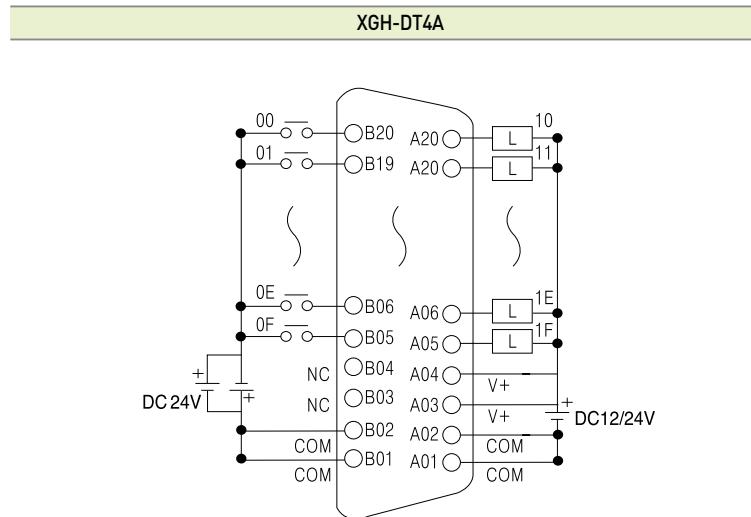


NOTE) Input address for XGK CPU is P00-P0F and Output address is P10-P1F when it is installed on the slot 0.
Input address for XGI CPU is %IX0.0.0-%IX0.0.15 and Output address is %QX0.0.16-%QX0.0.31

Precaution during installation of I/O module

- XGT has 2 kinds of digital input type: Current sink input, Current source input. For DC input module has different wiring depending on the input type, digital input type should be selected with consideration about connected input device.
- Max. number of simultaneous input point differs according to the module type. Therefore, review specification of input module before its application.
- Use an interrupt module when a response of high-speed input is demanded. But only one interrupt module can be installed per CPU module.
- If switching frequency is high or inductive switching load is used, the lifespan of relay output module will be reduced. Therefore, it is recommended to use transistor output module or triac output module.
- When driving an inductive load with output module, set the maximum switching frequency as 'ON' for 1 second and 'OFF' for 1 second.
- When using counter or timer with DC/DC converter, it is possible to have inrush current which cause a break down. Therefore to reduce an effect of inrush current, connect resistor or inductor to load or use the module whose max. load current is high.

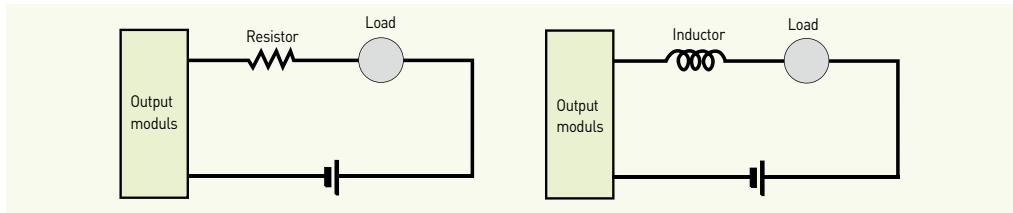

- Fuse of output module is not exchangeable to prevent a damage of external wiring when output module has a short-circuit.
- The number of simultaneous 'ON' points varies depending on input voltage, ambient temperature. Refer to the specification of input module.
- The following graph presents the relay lifespan of relay output module. It shows the maximum lifespan of relay which is used in the relay output.

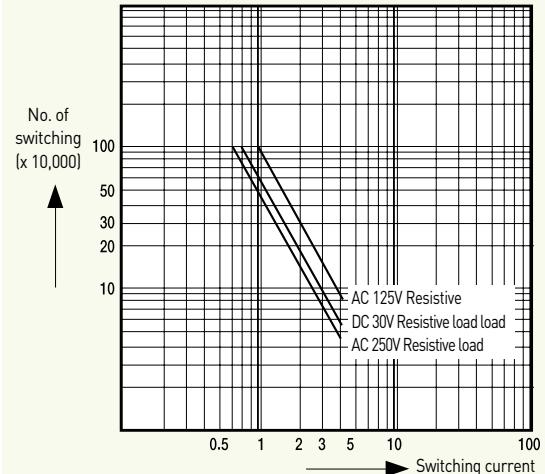

- Compressed terminal attaching sleeve cannot be mounted to XGT terminal block. The following picture shows appropriate compressed terminals for terminal block.



- Use 0.3~0.75mm twisted pair, below 2.8mm thickness cable for connecting to terminal block.
- Be careful when choosing and using the cable since the permissible current differs according to the insulation thickness.
- Joint torque of fixed screw and terminal block screw of the module needs to be within the range in the following table.

Joint	Joint torque range
I/O module terminal block screw (M3)	42~58 N·cm
I/O module terminal block fixed screw (M3)	68~89 N·cm

- Thermal protector is built in transistor module. Thermal protector is a function that protects PLC from an overload and overheating.





XGR Redundancy System

Redundancy system for high-speed process control based on IEC


- Processing speed: 42ns/step
- I/O Points: Max. 131,072
- Total memory: 25MB (Program 7MB, Data 2MB, Flash 16MB)
- Switching over time: Min 4.3ms, Max 22ms
- Built-in 256 PID loops control

Contents
34 XGR Configuration
36 System configuration
38 Application




XGR Configuration

- Base, Power, CPU, Network redundancy
- Dual port and 3 kinds of media (Twisted-Twisted, Optic-Optic, Twisted-Optic)

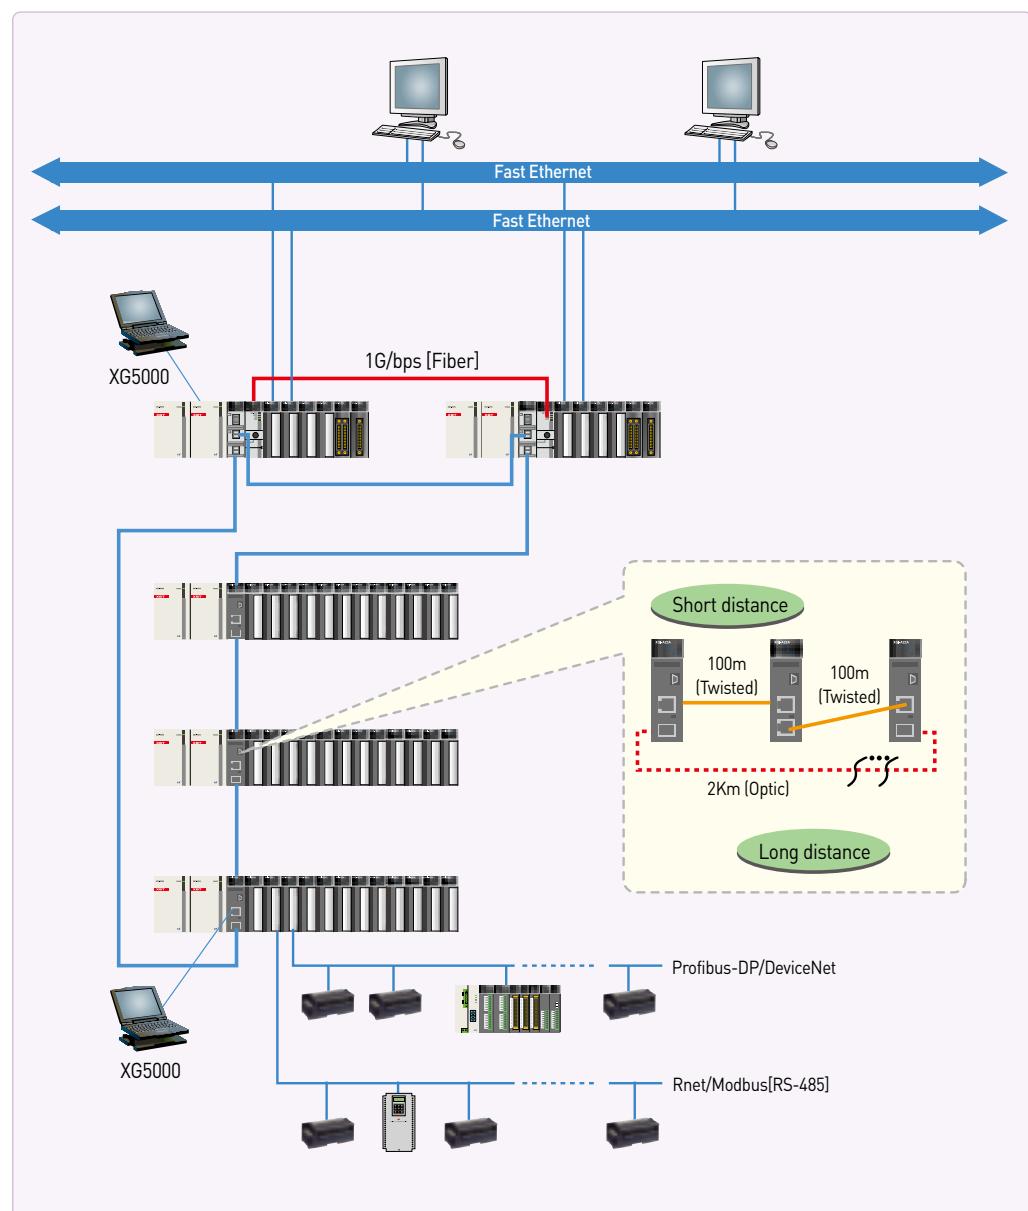


System configuration method


Fiber-optic

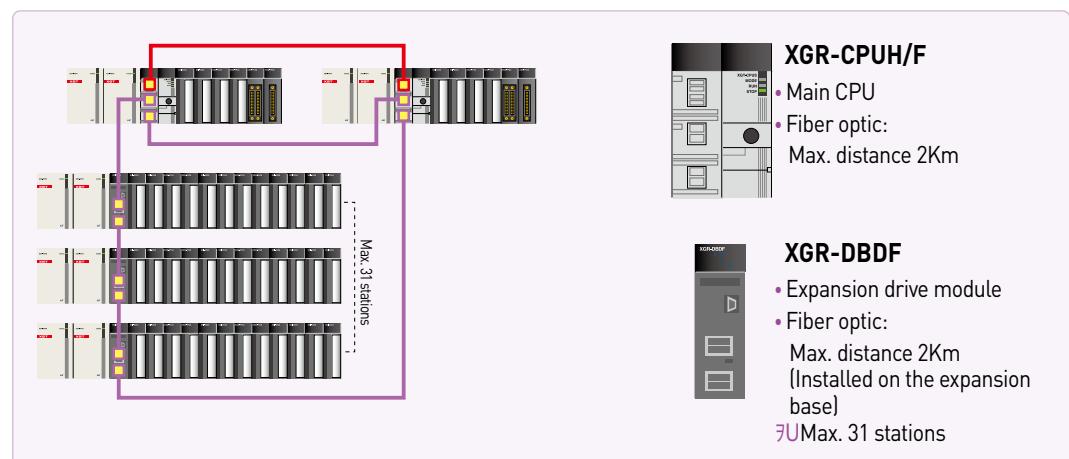

Twisted pair


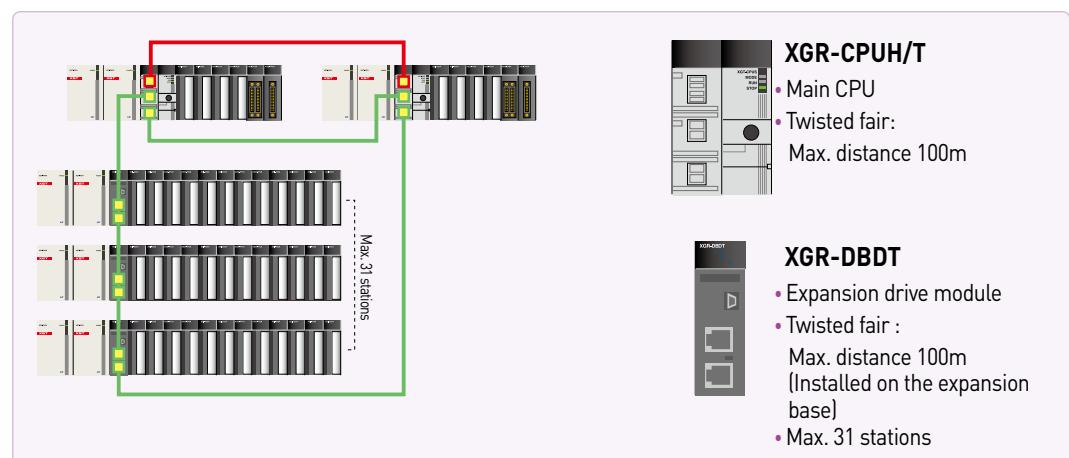


Hybrid (Twisted pair + Fiber Optic)

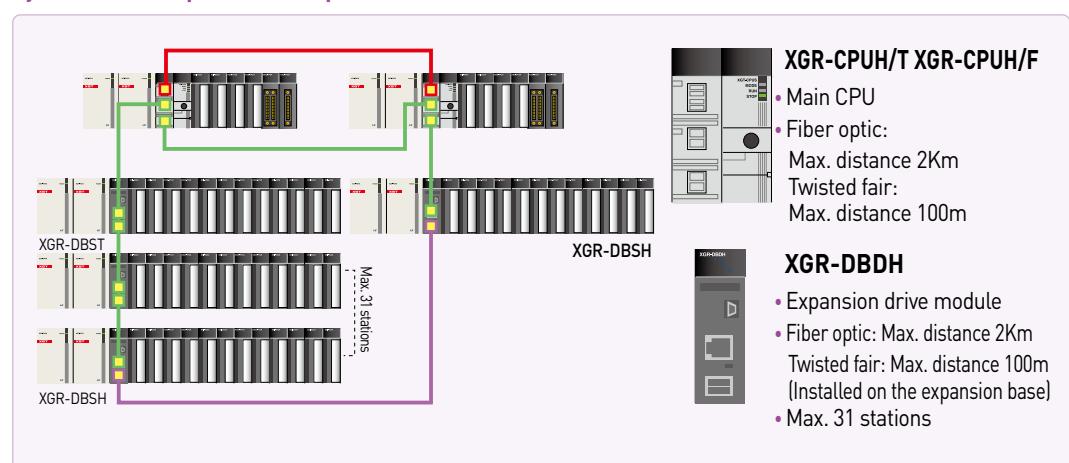


* Max. expandable distance: Fiber optic 60km, Twisted fair 3km
* CPU synchronization cable: 2m, 5m

System configuration

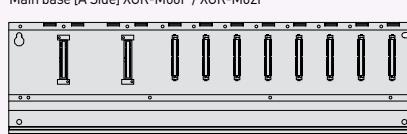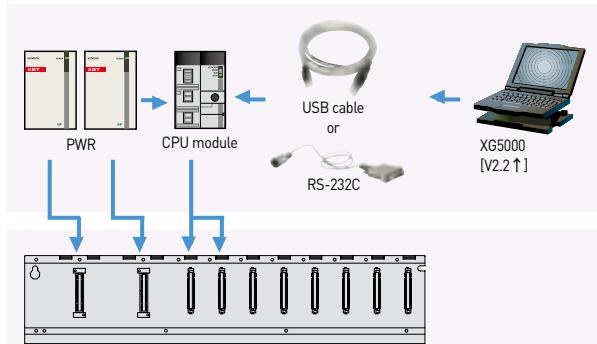

Main base

- 2 types of CPU (Fiber optic, Twisted pair)
- Power: AC110V, AC220V
- 6slot base: enable to install 6 communication modules

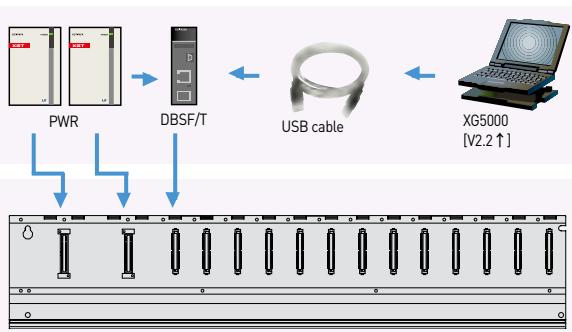

Expansion base

- Power: 8.5A/AC110V, 8.5A/AC220V
- Expansion drive: Fiber optic, Twisted pair, Hybrid
- EFM* and EIM*: not available with 12slot base

XGR module		
Expansion drive redundancy	XGR-DBDT	Twisted pair - Twisted
	XGR-DBDF	Pair Fiber optic - Fiber optic(2km)
	XGR-DBDH	Twisted pair - Fiber optic(2km)
Sync & Expansion cable	XGC-F201	2m [Fiber optic]
	XGC-F501	5m [Fiber optic]

Item	Input module		
	AC110V	AC220V	DC24V
8 points	-	XGI-A21A, XGI-A21C	XGI-D21A
16 points	XGI-A12A	-	XGI-D22A
32 points	-	-	XGI-D24A
64 points	-	-	XGI-D24B
	-	-	XGI-D28A
	-	-	XGI-D28B

Item	Output module		
	Relay	Triac	Transistor
8 points	XQQ-RY1A	-	XQQ-TR1C
16 points	XQQ-RY2A XQQ-RY2B	XQQ-SS2A	XQQ-TR2A XQQ-TR2B
32 points	-	-	XQQ-TR4A
64 points	-	-	XQQ-TR8A XQQ-TR8B

Item	Input/Output mixed module	
	16-point DC input	16-point TR output

Special module		
Analog input	XGF-AV8A	Voltage input type, 8Ch
	XGF-AC8A	Current input type, 8Ch
	XGF-AD8A	Voltage/ Current input, 8Ch
	XGF-AD4S	Voltage/ Current input, 4Ch [Isolated]
	XGF-AD16A	Voltage/ Current input, 16Ch
	XGF-AW4S	2-wire Voltage/ Current input, 4Ch [Isolated]
Analog output	XGF-DV4A	Voltage output type, 4Ch
	XGF-DC4A	Current output type, 4Ch
	XGF-DV8A	Voltage output type, 8Ch
	XGF-DC8A	Current output type, 8Ch
	XGF-DV4S	Voltage output, 4Ch [Isolated]
	XGF-DC4S	Current output, 4Ch [Isolated]
	XGF-DA4S	Voltage/Current output, 4Ch [Isolated]
Analog Input/Output	XGF-AH6A	Input: 4ch, Voltage/ Current Output: 2Ch Voltage/ Current
High-speed counter	XGF-HO2A	Pulse [OC] input type, 2Ch
	XGF-HD2A	Pulse [LD] input type, 2Ch
	XGF-P01H-P04H	Open collector, 1~4axes
Positioning	XGF-P01H-P04H	Line drive, 1~4axes
Positioning [Network Type]	XGF-PN8A	LS Standard EtherCAT Net. 8axes
Motion module	XGF-PN8B	Standard EtherCAT Net. 8axes
Temperature control	XGF-M32E	Standard EtherCAT Nee. 32axes
	XGF-TC4S	Thermocouple input, 4Ch
	XGF-RD4A	RTD input, 4Ch
	XGF-RD4S	RTD input, 4Ch [Insulated]
Temperature controller	XGF-TC4UD	Input: 4ch [Voltage/Current, RTD/TC] Output: 8ch [TR/Current]
	XGF-TC4RT	Controller: 4 loops Input: 4ch [RTD] Output: 4ch [TR] Controller: 4 loops
Event input	XGF-SOEA	DC24V, 32points

XGR module		
CPU	XGR-CPUH/T	Twisted pair
	XGR-CPUH/F	Fiber optic[2km]
	XGR-CPUH/S	Fiber optic[15km]
Power	XGR-AC12	110V, 5.5A(Main base)
	XGR-AC13	110V, 8.5A(Expansion base)
	XGR-AC22	220V, 5.5A(Main base)
	XGR-AC23	220V, 8.5A(Expansion base)
	XGR-DC42	DC24V/DC5V/7A, Main[Expansion base]
Base	XGR-M02P	2Slot[Main base]
	XGR-M06P	6Slot[Main base]
	XGR-E08P	8Slot[Expansion base]
	XGR-E12P	12Slot[Expansion base]
	XGR-E12H	12Slot[Expansion base, Drive Redundancy]
Expansion drive	XGR-DBST	Twisted pair - Twisted
	XGR-DBSF	Pair Fiber optic - Fiber optic[2km]
	XGR-DBSH	Twisted pair - Fiber optic[2km]
	XGR-DBSFS	Pair Fiber optic - Fiber optic[15km]
	XGR-DBSHS	Twisted pair - Fiber optic[15km]

Communication module		
OPC UA	XGL-EOPCT	OPC UA, Twisted fair 2Ch
RAPIEneT+	XGL-EFMTB	Master/Client, Twisted fair 2ch.
-RAPIEneT v2	XGL-EFMB	Master/Client, Fiber optic 2ch.
-EtherNet/IP	XGL-EFMB	Master/Client, Twisted fair/fiber optic
-Modbus TCP/IP	XOL-ES4T	Stand alone switch twisted pair 4ch.
-Dedicated XGT Network	XOL-ES4H	Stand alone switch twisted 2ch. fiber 2ch.
Computer	XGL-EH5T	Open Ethernet switching hub
Link [Cnet]	XGL-CH2B	RS-232C 1ch, RS-422/485 1ch
DeviceNet[Dnet]	XGL-C22B	RS-232C 2ch
	XGL-C42B	RS-422/485 2ch
Profibus-DP (Pnet)	XGL-DMEB	DeviceNet, Master
	XGL-PMEB	Profibus-DP, Master
	XGL-PSRA	Profibus-DP Slave, Remote interface
	XGL-PSEA	Profibus-DP Slave
Rnet	XGL-RMEB	Rnet, Master, TP
	GOL-RR8T	Rnet stand alone repeater hub
Fnet	XGL-FMEA	Fnet, Master
BACnet/IP	XGL-BIPT	BACnet client/server

Specification

Item		Description		Remark
		XGR-CPUH/F	XGR-CPUH/T	
Media		Fiber optic	Twisted pair	
Operation method		Cyclic execution, Periodic operation, Interrupt operation, Fixed scan		
I/O control method		Scan synchronized batch processing method (Refresh method)		
Program language		LD (Ladder Diagram), ST (Structured Text), SFC (Sequential Function Chart), IL (Read only)		
Number of Instructions	Operator	18		
	Standard function	130 + Real type function		
	Standard function block	41		
Special function/ function block		Special function block, Process control function block		
Processing speed	LD	0.042μs/Step		
	MOV	0.126μs/Step		
	Real type	±: 0.602μs(S), 1.078μs(D) × : 1.106μs(S), 2.394μs(D) ÷ : 1.134μs(S), 2.66 μs(D)		S: Real type D: Long real type
I/O points		I: 131,072 points, Q: 131,072 points (Total: 1131,072)		
DRAM	Program memory	7MB		Including Upload, Parameter, System area *Battery back-up memory : 8MB
	Data memory	2MB		
	Reserved memory	7MB		
Flash memory		16MB		
Data memory	Direct variable	256k Byte		
	Auto allocated variable	512k Byte		
	Timer	No limitation, Range: 0.001sec ~ 4,259,967.295sec [1,193hours]		
	Counter	No limitation, Range: -32,768 ~ +32,767		
	System	4k Byte		
	Flag	64k Byte	L, N area	
File register	Communication			
	Special	2k Byte (32 base, 16 slot, 32 channel)	U area: Analog device area	
File register		64k Byte *2	R area: read/write (Command, XG5000)	
Program	Number of program blocks	256		
	Initial task	1 (_INT)		
	Cycle task	32		
	Internal device task	32		
Operation mode		RUN, STOP, DEBUG		
Restart mode		Warm, Cold		
Self diagnostic functions		Watchdog timer, Memory error, I/O error, Battery error, Power Supply error		
Program download		RS-232C (1CH), USB (1CH)		
Data retain		Auto allocated variable: set by variable definition Direct variable: set by parameter		
Max. expansion base		31 stages		


Specification

Item	Hardware		Remark
CPU module	2 slot / Fiber, Twisted fair		
Expansion drive module	1 slot / Fiber, Twisted fair, Hybrid		
Base	Main base: 6 slot, Expansion base: 12 slot		
Power	AC110V	5V-5.5A	
	AC220V	5V-5.5A	
	AC110V	5V-8.5A	
	AC220V	5V-8.5A	
Expansion method and Max. expansion base	31 stages by network		
Base number setting	Rotary switch of expansion drive module		
Distance between expansion bases	Twisted fair: 100m (3km), Fiber: 2km (60km)		
Master/Standby switching over time	50ms or less		


Available modules for each base

Base		Available modules
1	Main base	CPU, Ethernet module (XGL-EFMx), RAPIEnet module (XGL-EIMx) * x: T (Twisted fair), F (Fiber optic), H (Hybrid)
2	Expansion base	I/O modules for XGI (Ethernet based communication module should be installed on Main base) Number of communication module: 12 for High-speed link, 8 for P2P Number of analog module: Analog input (139), Analog output (250)


Water power generation or Dam door control

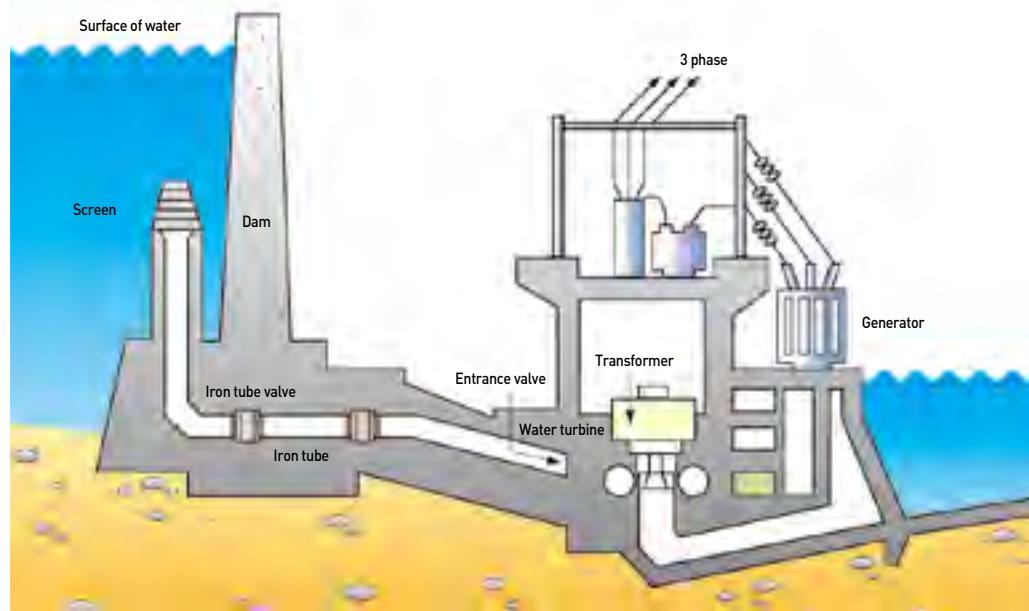


System configuration

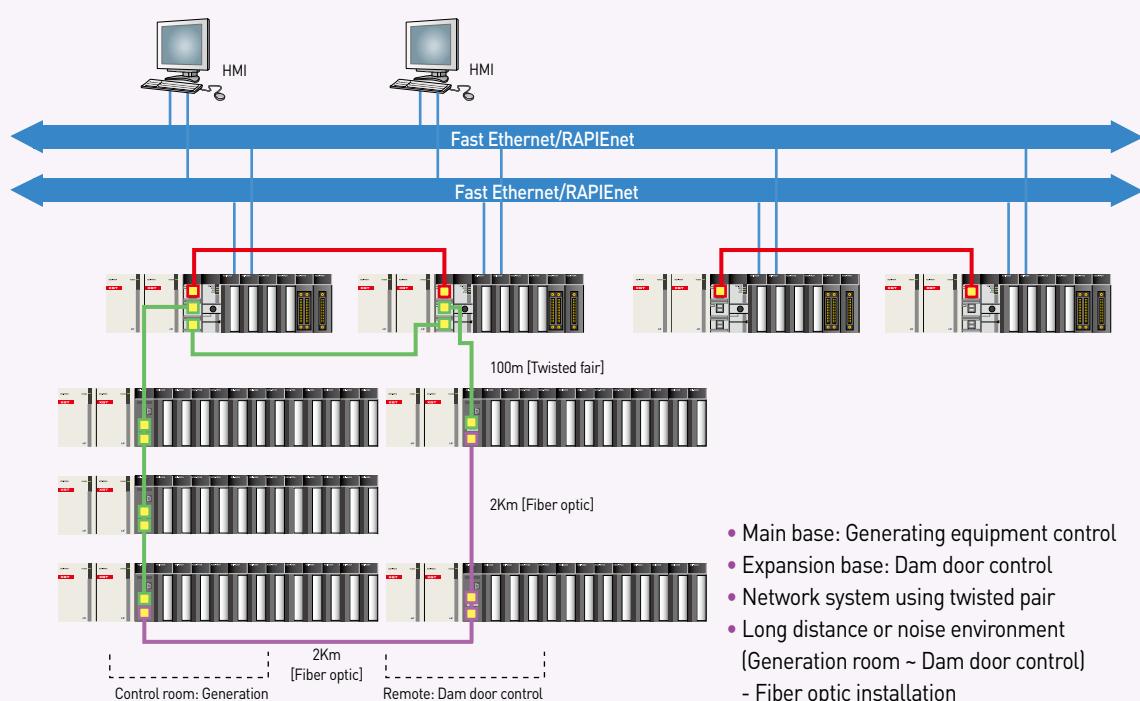


Generating boiler control

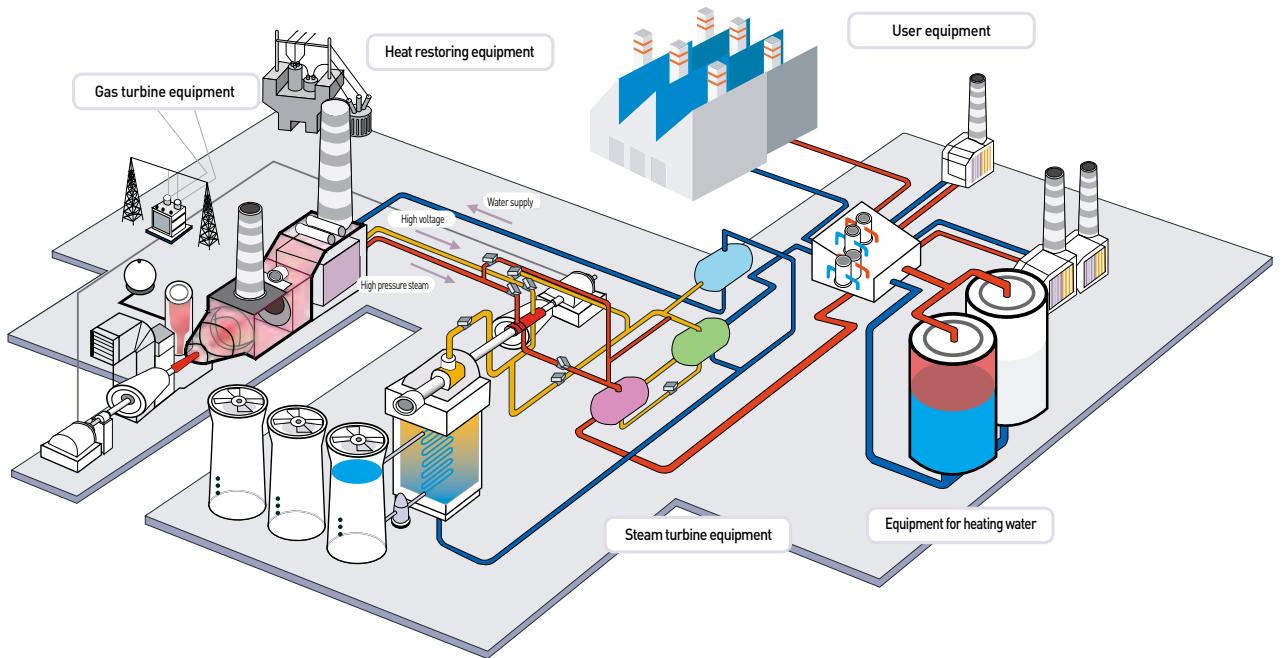


System configuration

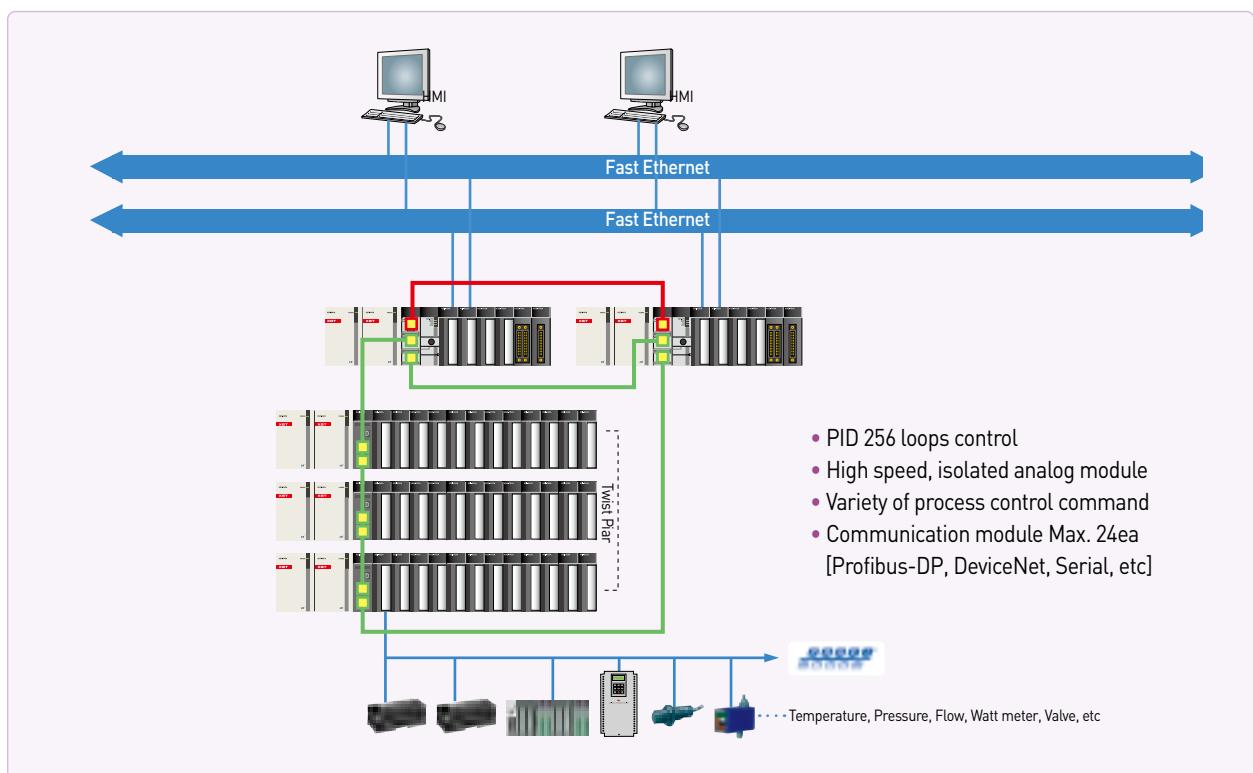


Stage control

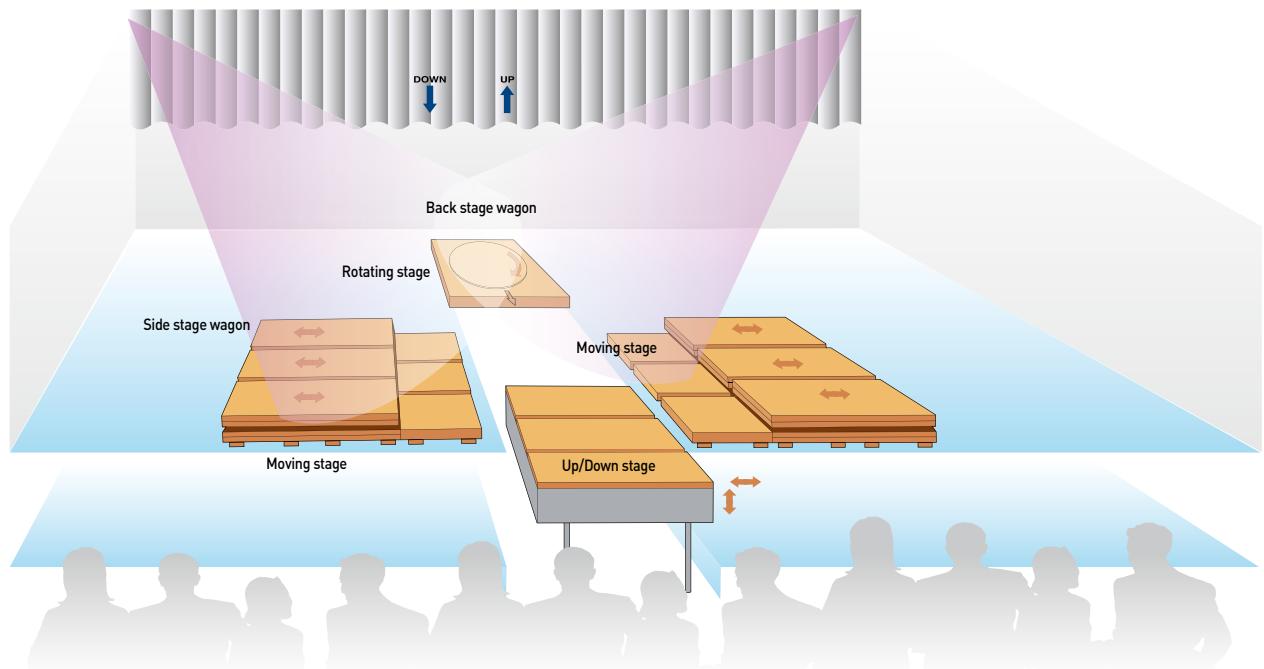


System configuration

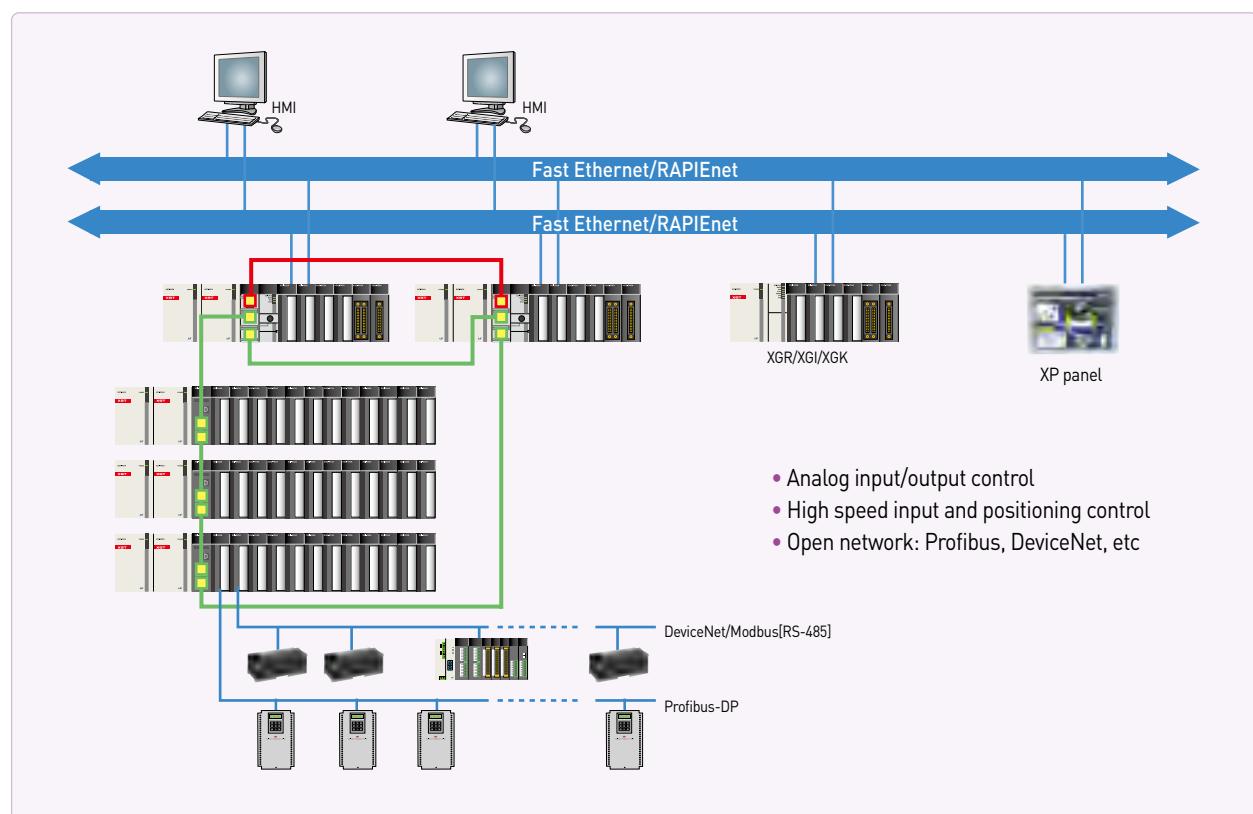


Water processing control

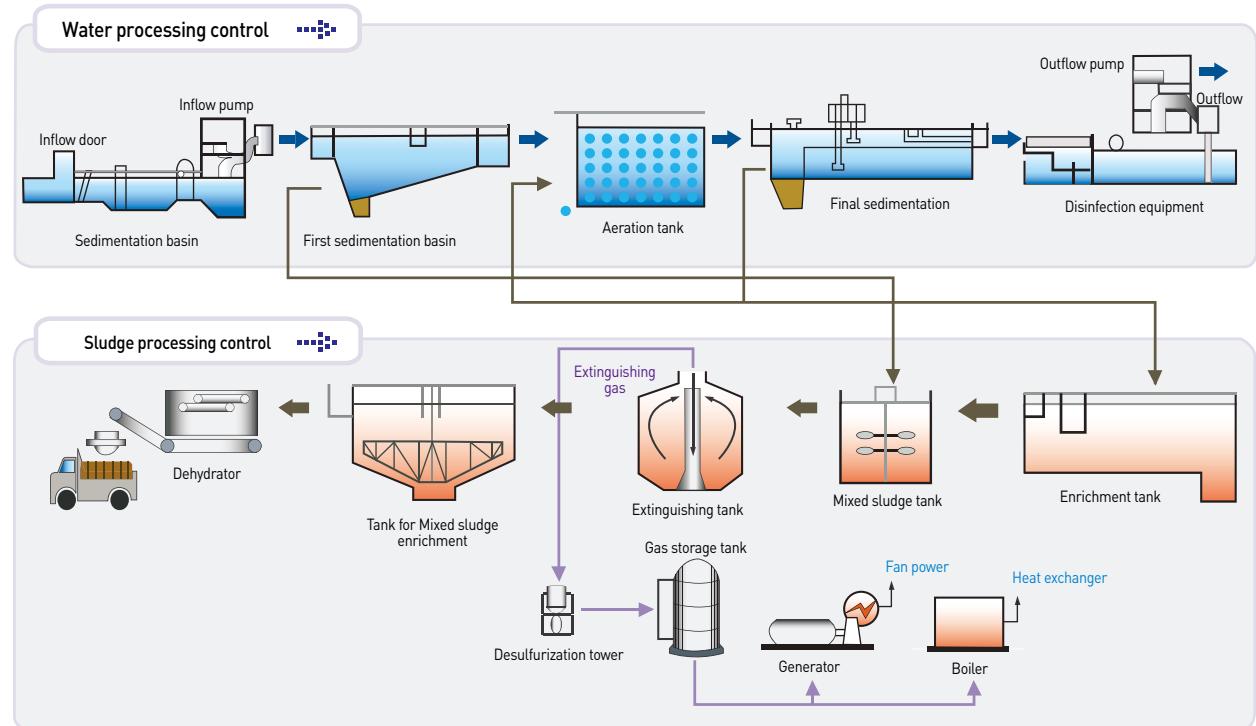


System configuration

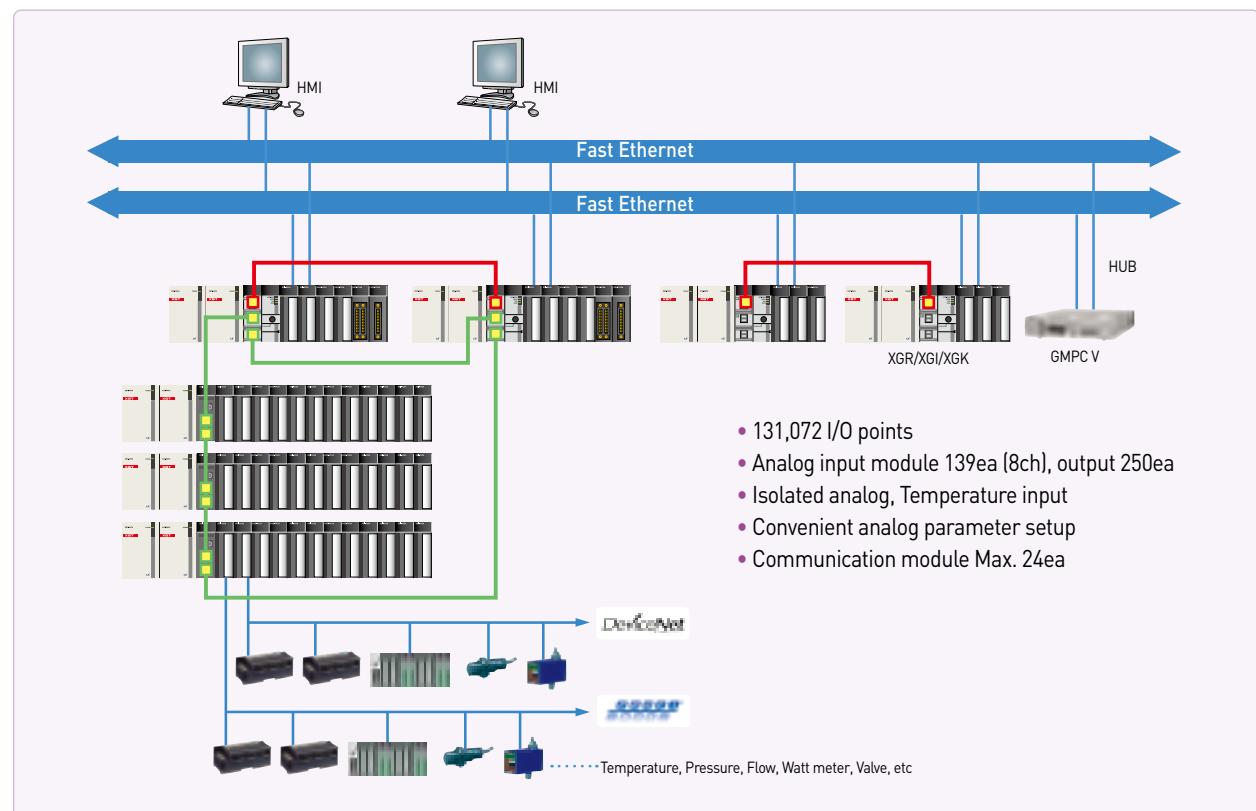


Incinerator control

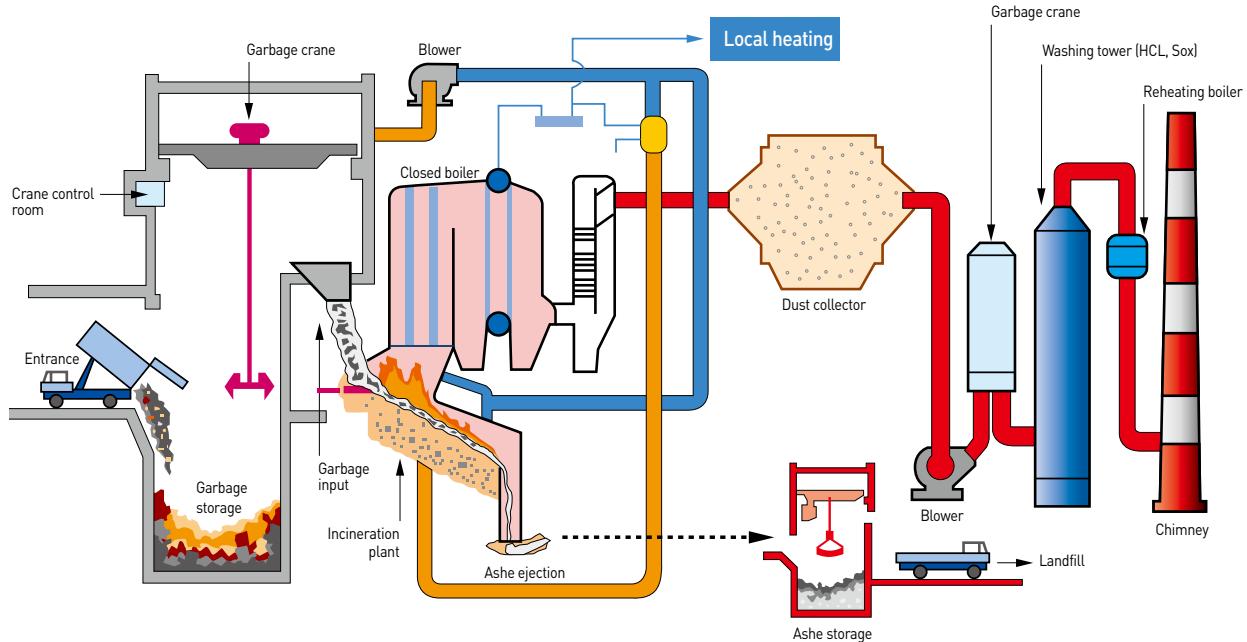

System configuration

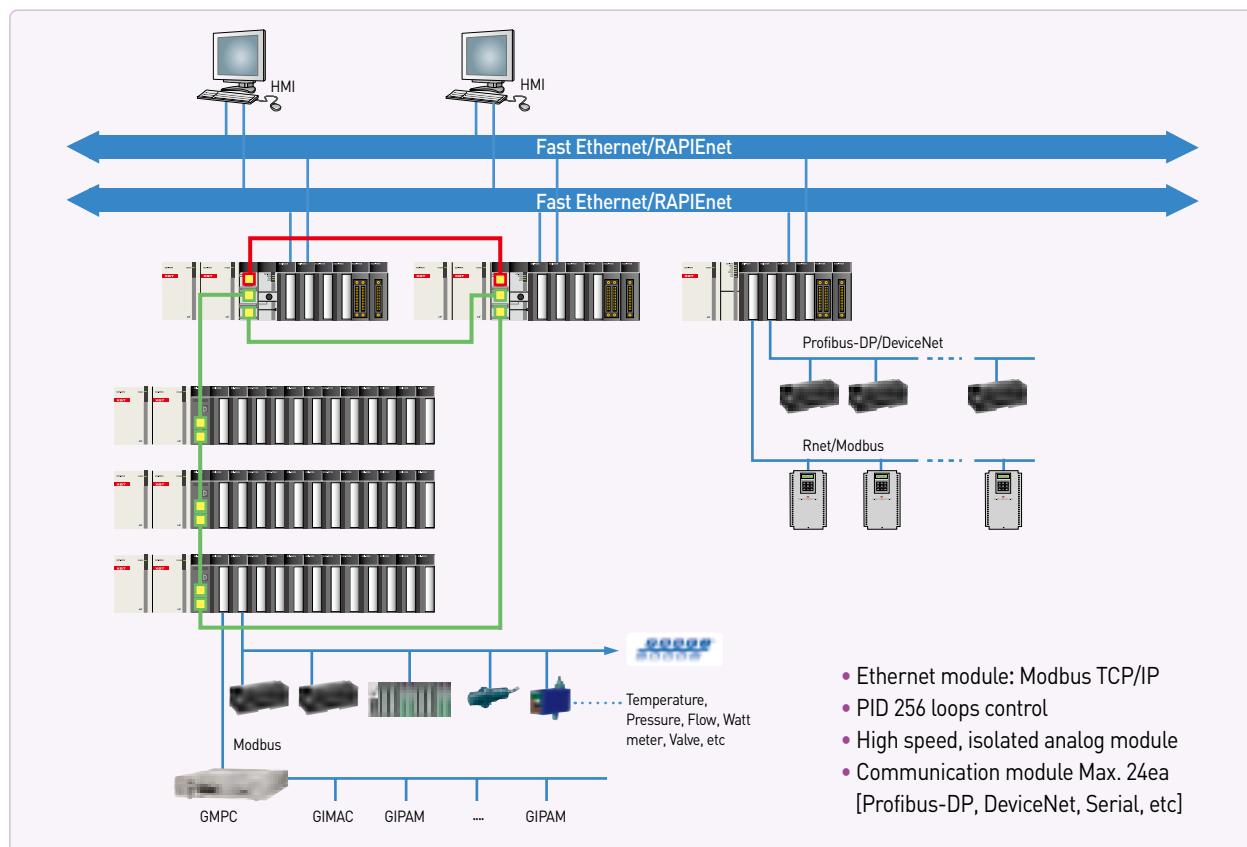



Broad casting system

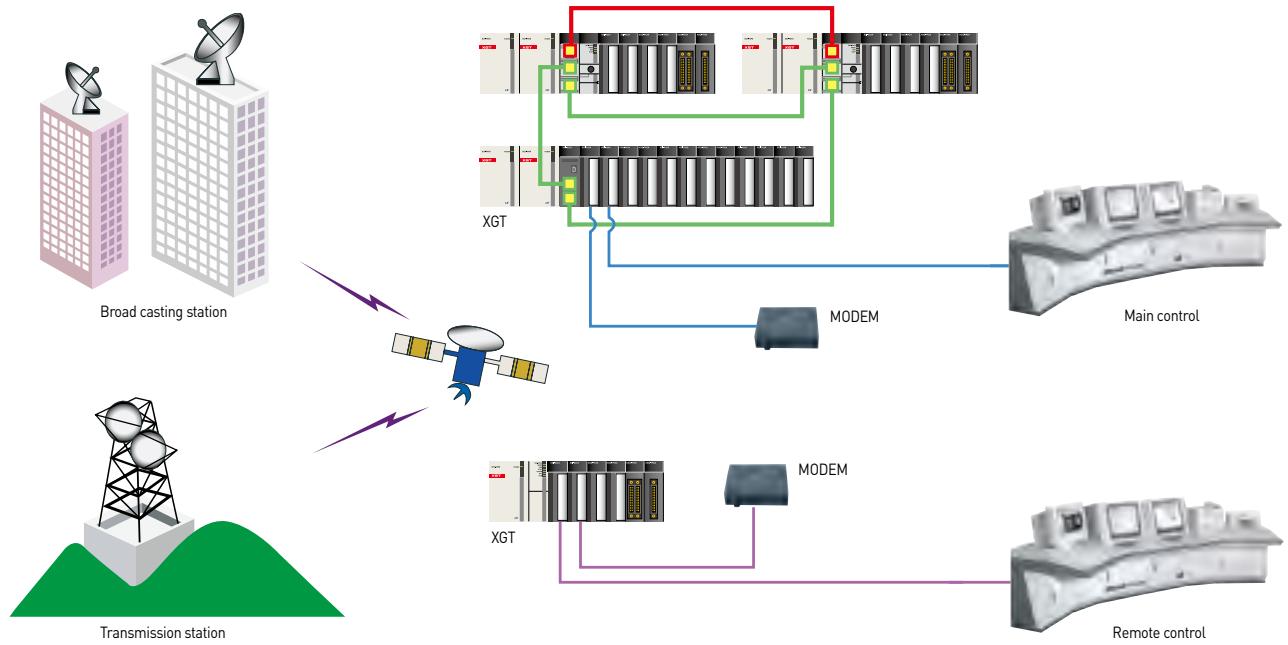

SYSTEM

System configuration

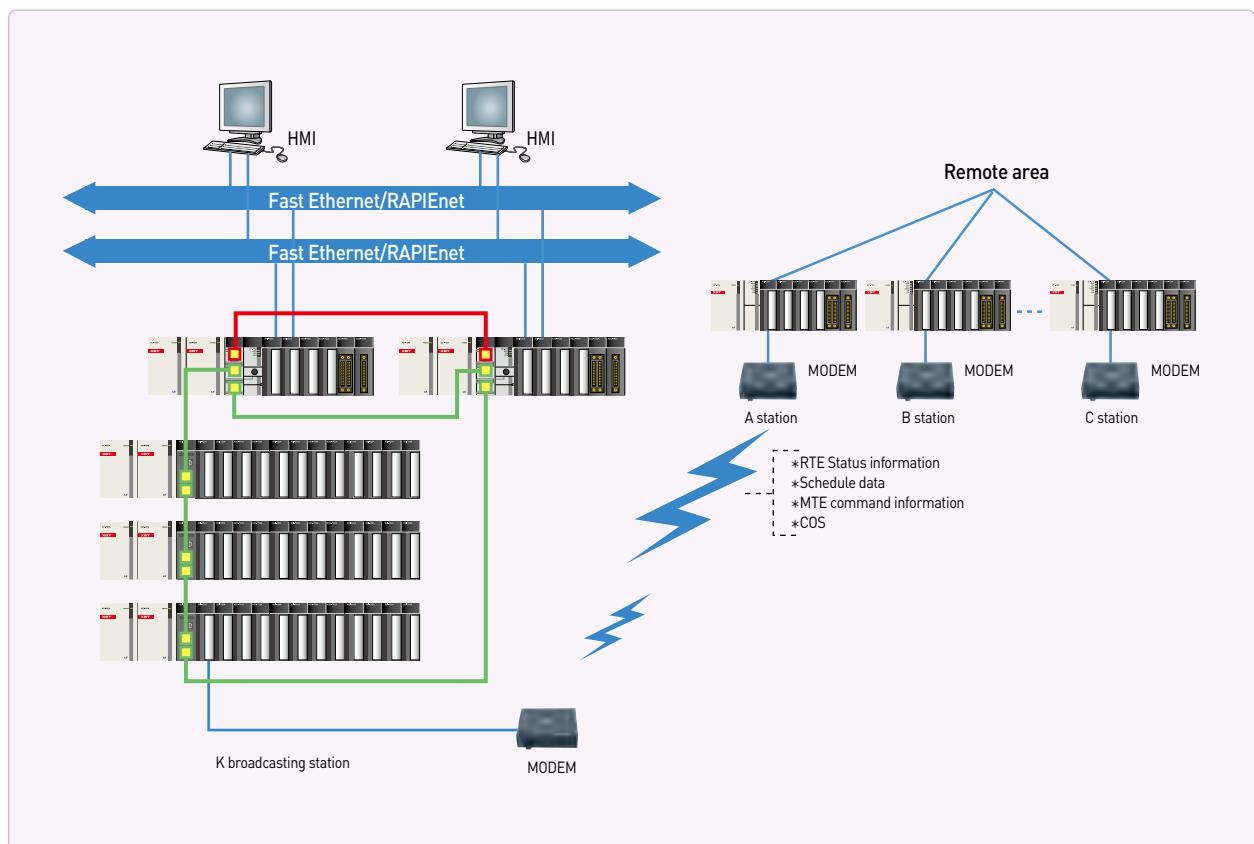

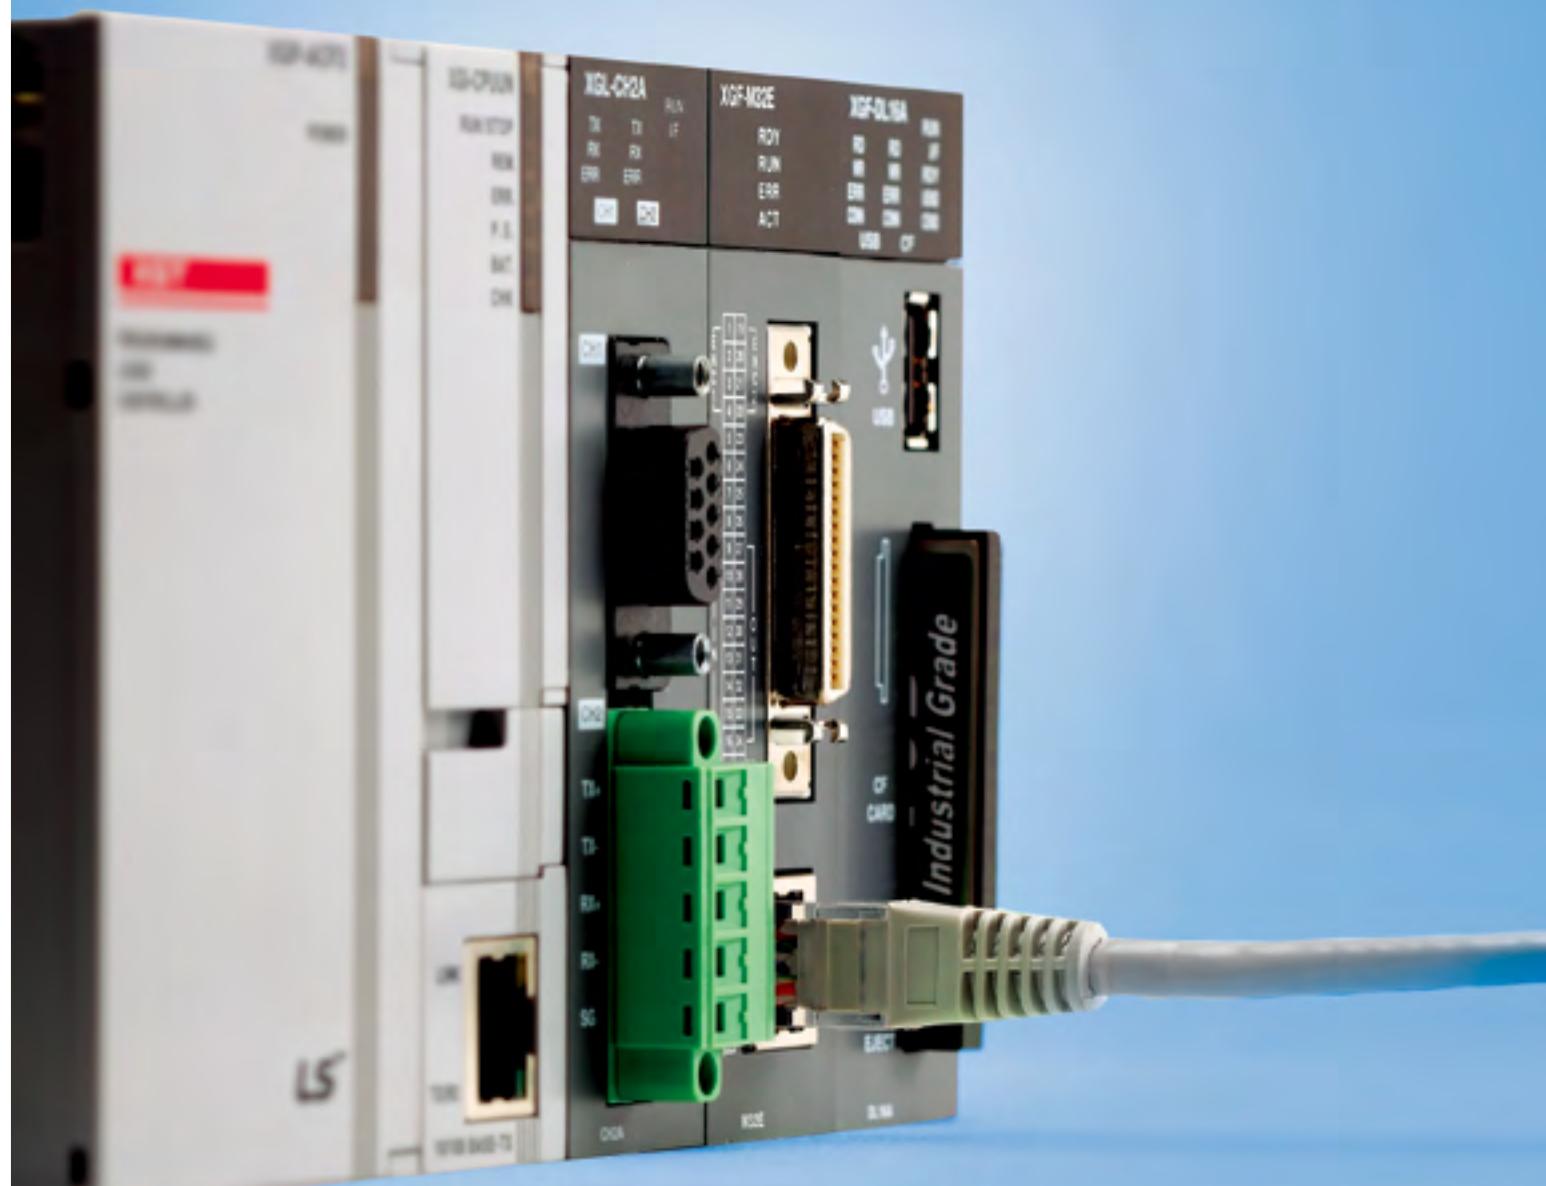



Network

Along with Ethernet, Profibus-DP, and DeviceNet, XGT series provide the maximum in control integration and communication flexibility.

Contents

- | | |
|---|---|
| 46 XGT Network system | 74 Fnet |
| 48 RAPIEnet ⁺ | 76 BACnet/IP |
| 50 RAPIEnet ⁺ System Configuration | 78 Computer-Link |
| 52 RAPIEnet ⁺ Master(Client) module | 80 Communication example [Ethernet] |
| 54 RAPIEnet ⁺ Expansion driver module | 82 Communication example [Rnet] |
| 56 RAPIEnet ⁺ Smart I/O [Stand alone type] | 84 Communication example [DeviceNet]
[SyCon setting Profibus, DeviceNet] |
| 58 RAPIEnet ⁺ Smart I/O [Expandable type] | 85 SMART I/O [Stand alone] |
| 60 RAPIEnet ⁺ Multiport RAPIEnet switch[MRS] | 86 SMART I/O
[Modbus/TCP, Ether Net/IP Adapter] |
| 62 RAPIEnet ⁺ CP Card | 88 SMART I/O [DeviceNet adapter] |
| 64 Computer-Link [Cnet] | 89 SMART I/O [Profibus-DP adapter] |
| 66 DeviceNet [Dnet] | 90 SMART I/O [Rnet adapter] |
| 68 Profibus-DP [Pnet] system | 91 SMART I/O [Features] |
| 70 Profibus-DP[Pnet] Slave I/F system | |
| 71 Profibus-DP [Pnet] Remote I/F system | |
| 72 Rnet | |

Features



※CIM:Computer Integrated Manufacturing

About RAPIEnet⁺

Real-time, hybrid & ring topology-based industrial Ethernet solution, integrating Modbus TCP/IP, EtherNet/IP and RAPIEnet for IoT, future-oriented technology for high performance & efficiency.

RAPIEnet

- IEC standard (RAPIEnet) communication technology applied
- Dedicated network for LS PLC
- Communication speed: 100Mbps, 1Gbps
- Topology : Star, Line, Ring
- Dual port (T.Pair / F.Optic / Hybrid)
- Built-in high performance industrial switch
- Max read/write data size : 1,400 byte
- Max No. of connected stations per network : 64 stations

EtherNet/IP


- Topology : Star, Line
- Communication speed: 100Mbps, 1Gbps
- Dual port (T.Pair / F.Optic / Hybrid)
- Built-in high performance industrial switch
- Max read/write data size : 1,400 byte(Non-periodic tag)
- Max No. of connected stations per network : 64 stations

Modbus TCP/IP

- Eopology : Star, Line
- Communication speed: 100Mbps, 1Gbps
- Dual port (T.Pair / F.Optic / Hybrid)
- Built-in high performance industrial switch
- Max read/write data size : 125/123 Word
- Max No. of connected stations per network : 64 stations

XGT dedicated

- Topology : Star, Line
- Communication speed: 100Mbps, 1Gbps
- Dual port (T.Pair / F.Optic / Hybrid)
- Built-in high performance industrial switch
- Max read/write data size : 1,400 byte
- Max No. of connected stations per network : 64 stations

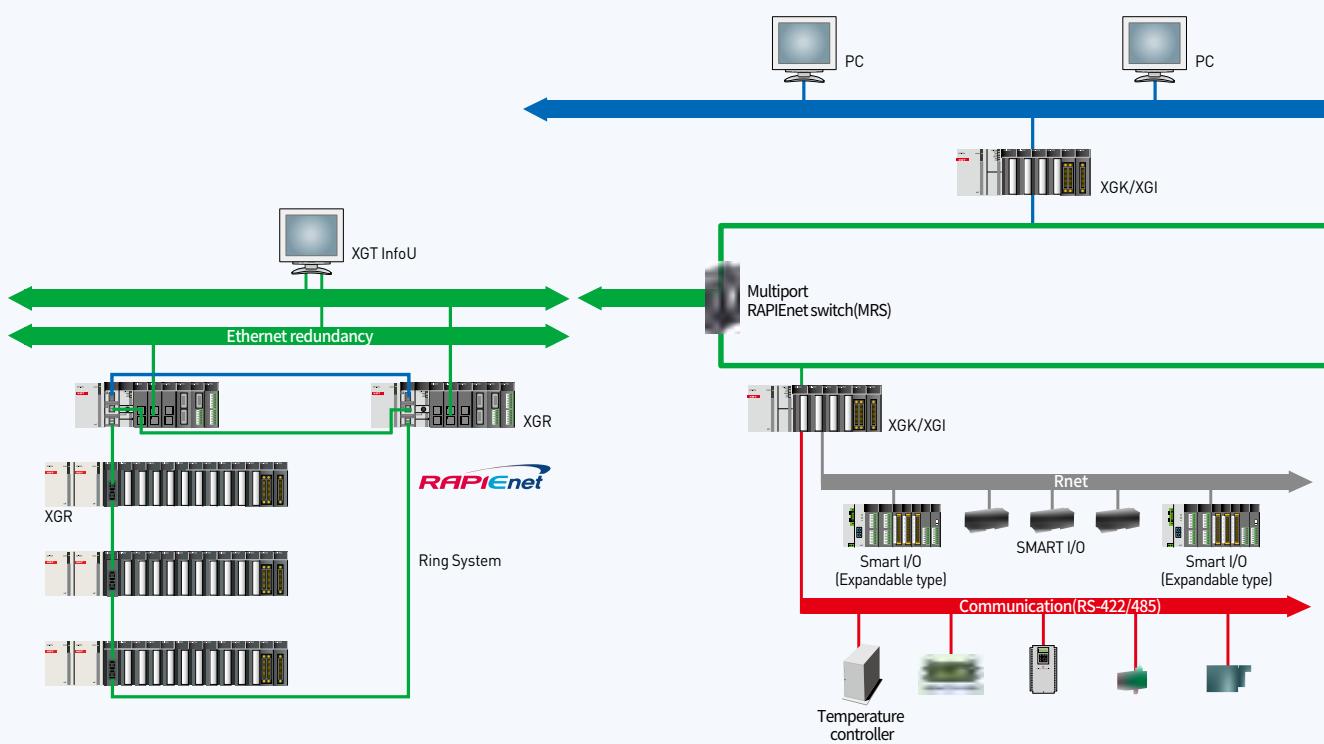

Computer Link(Cnet)

- RS-232C/485/422 communication
- Long-distance communication via modem connection
- Various connection to HMI S/W (XGT, Modbus RTU, Modbus ASCII)
- User-defined communication
- Convenient P2P master (XGT, Modbus)

Fnet

- Dedicated network for LS PLC
- Easy high-speed link parameter setup
- 1Mbps high-speed communication
- Max. 750m
- Max. 6ea repeater available (Max. expansion 5.25km)
- Network management through Auto scan

Rnet

- High-speed communication 1Mbps
- Long communication distance Max.750m
- Max. 6 repeaters (up to 5.25km)
- Network management using Auto-scan (Slave module information)

DeviceNet(Dnet)


- Connectable to other PLCs and control device
- Compliance of the ODVA standard
- Flexible communication speed setting: 125/250/500Kbps
- Multi-drop and T branch connection
- Long communication distance: Max. 500m


Profibus-DP(Pnet)

- Optimum communication for a master automation device and distributed slave I/O devices
- Fast slave communication omitting application layer
- Long communication distance: Max. 1200m
- Communication using High-speed link parameter

Installation number of network module available

Item	XGK/XGI/XGR CPU
Total network module	24
High-speed link module	12
P2P service	8

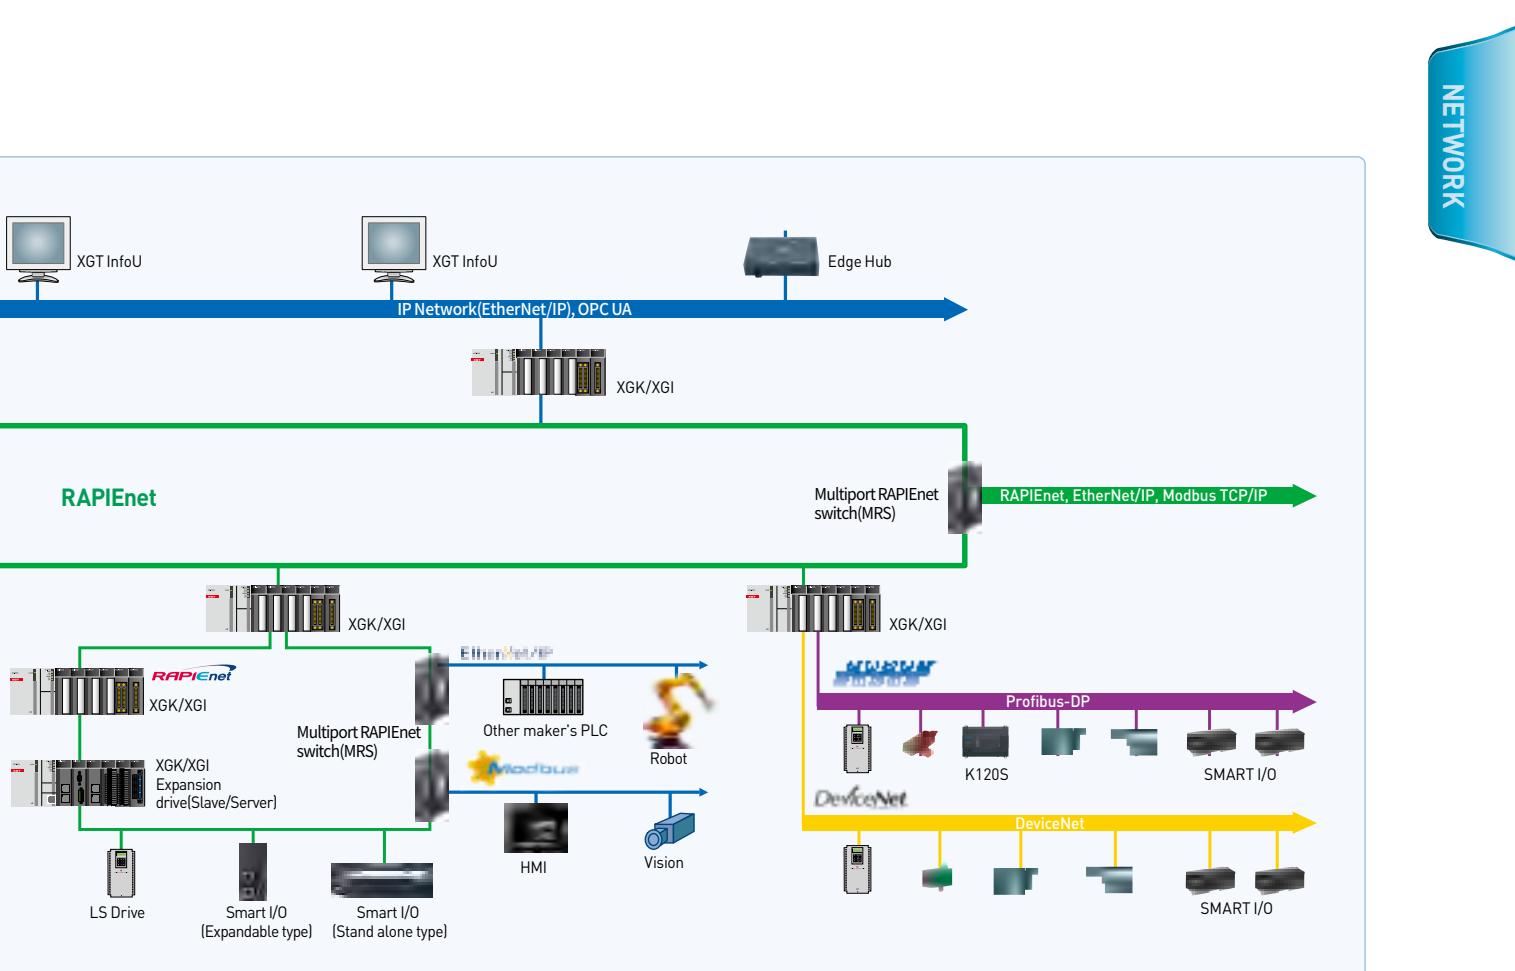

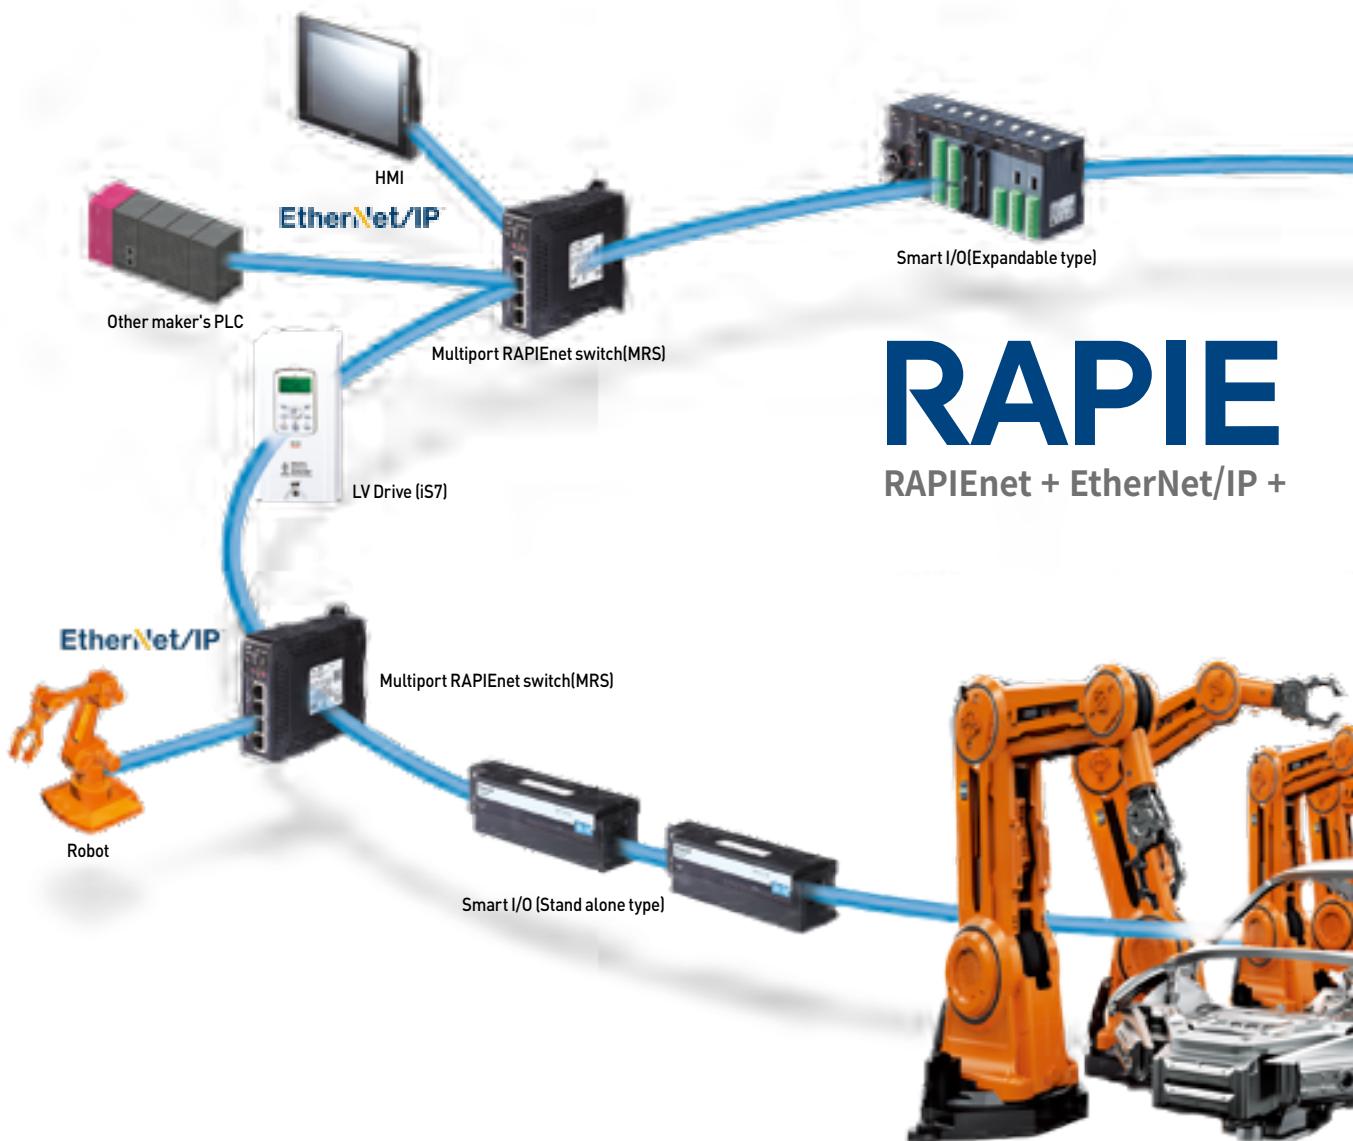


About RAPIEnet+

Real-time, hybrid & ring topology-based industrial Ethernet solution, integrating Modbus TCP/IP, EtherNet/IP and RAPIEnet for IoT and future-oriented technology for high performance & efficiency.



Professional

- Integrated hybrid network solution
- Three protocols in a single product: Modbus TCP/IP, EtherNet/IP, RAPIEnet
- Various and convenient network system configuration with smart extension service
- IEC standard (RAPIEnet) communication technology applied
- Gigabit Ethernet from 100Mbps to 1Gbps for large networks

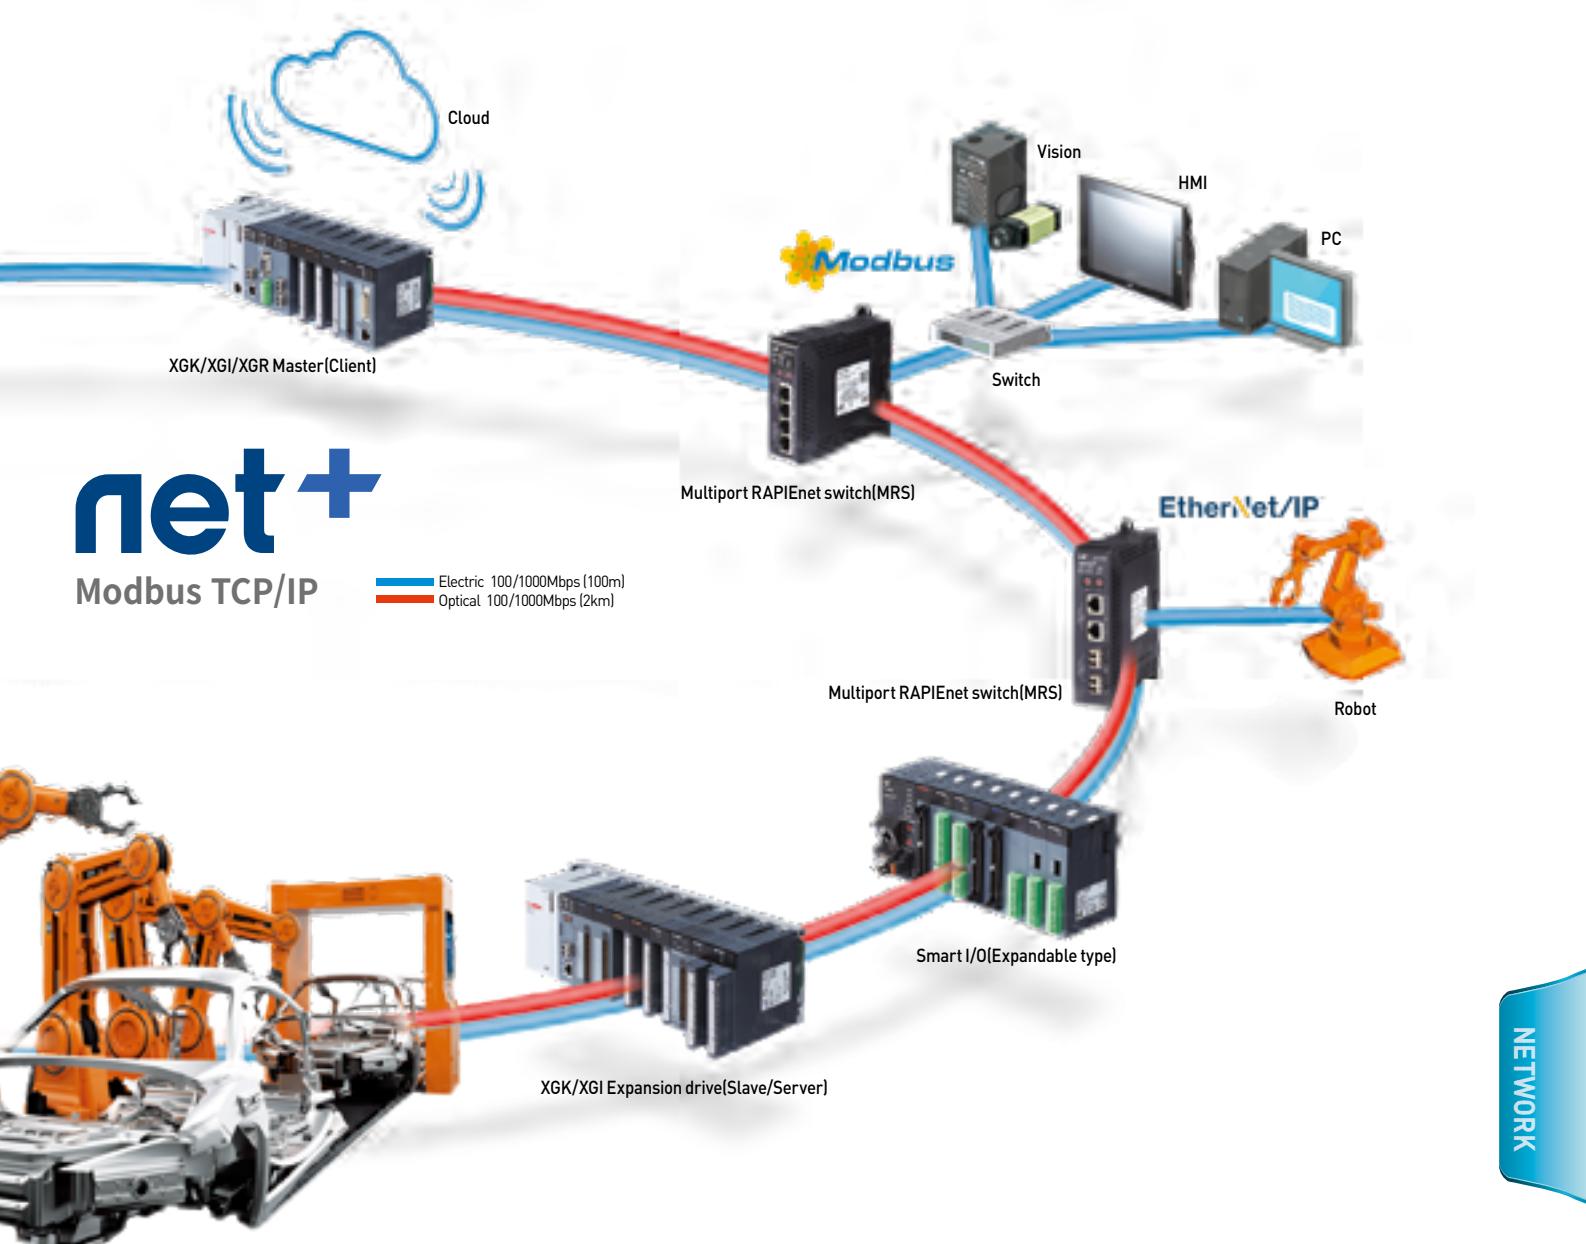

Efficiency

- Efficient network configuration with 2-port Ethernet
- Network cost reduction using electrical to fiber optic cable
- Optimized system configuration with automation products (PLC, remote I/O, Drive, etc.)
- Easy engineering via intuitive and user-friendly programming tool (XG5000)



Convenience

- Autoscan for network registration
- Min. parameter and programming setup
- Simple editing (add/change) for modules of operating system
- Variable maintenance available: service status, diagnosis, comm. history, etc.




Reliability

- Reliability improvement for ring topology network
- Various functions for network monitoring and diagnosis
- Noise reduction by fiber-optic network

Ring Type

- Ring topology and configuration with third-party devices: reliability & product/wiring reduction
- Hybrid network (electric/fiber-optic): system cost reduction


Electric 100/1000Mbps (100m)
 Optical 100/1000Mbps (2km)

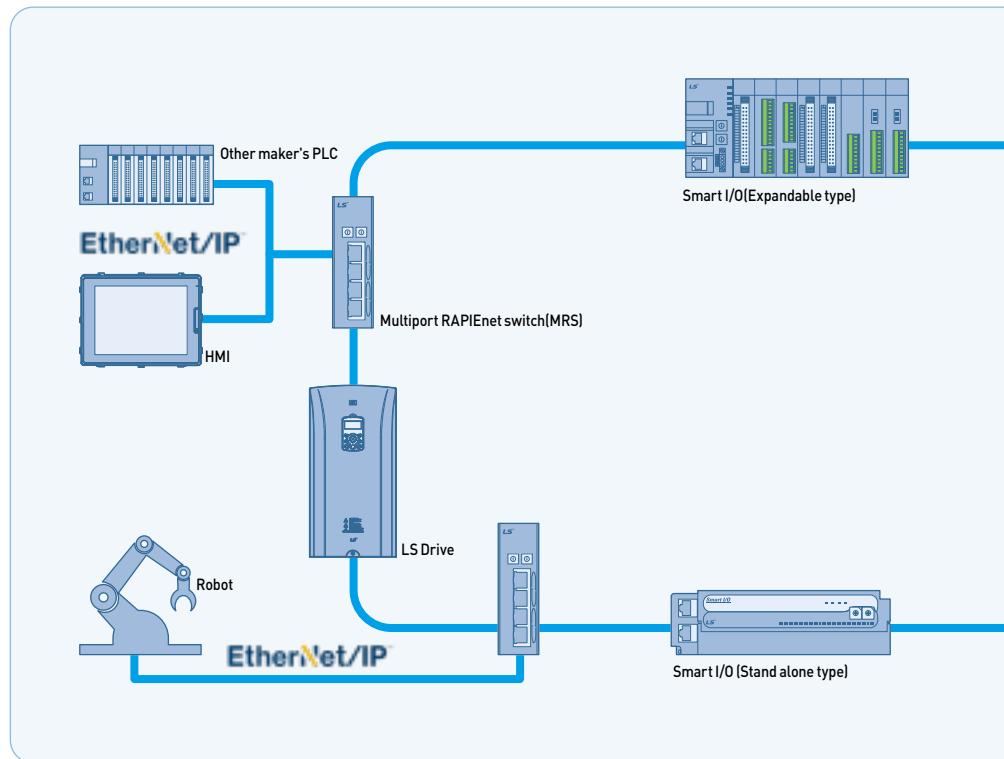

Daisy-chain Type

- Integrated network configuration with third-party devices
- EtherNet/IP and Modbus Hybrid communication: product/wiring reduction


Electric 100/1000Mbps (100m)
 Optical 100/1000Mbps (2km)

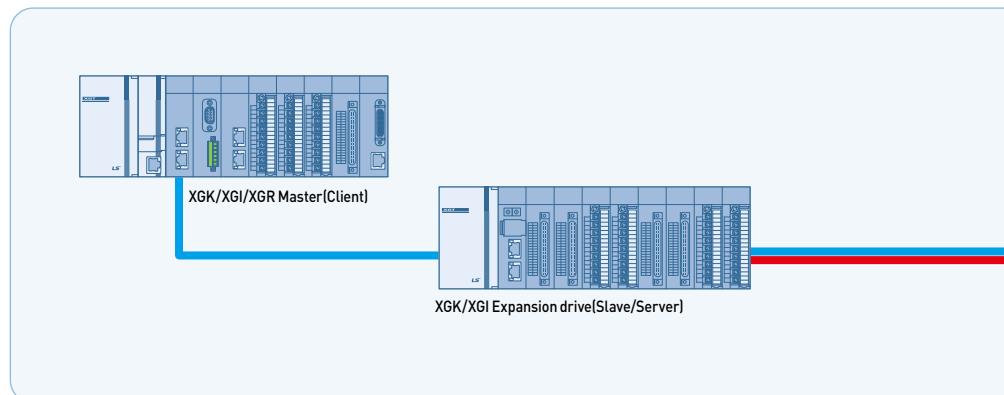




Star Type

- Integrated network configuration with third-party devices
- Various network configuration (general switch application available)

Electric 100/1000Mbps (100m)

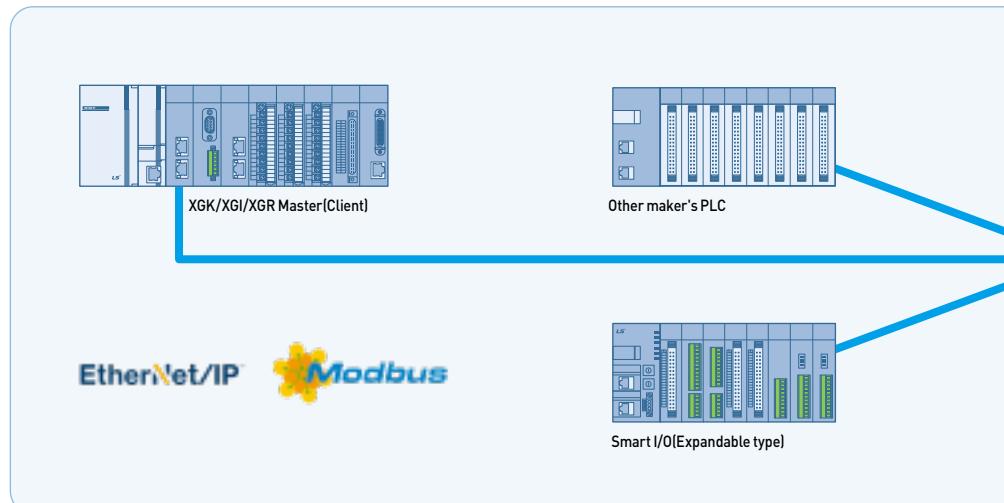

RAPIEnet+

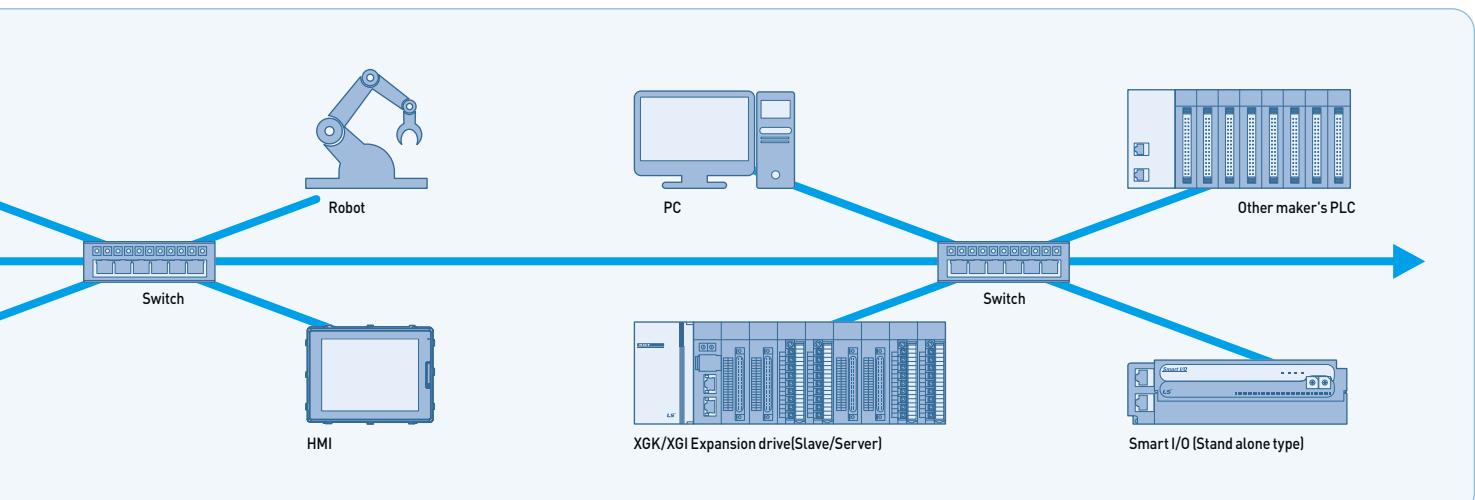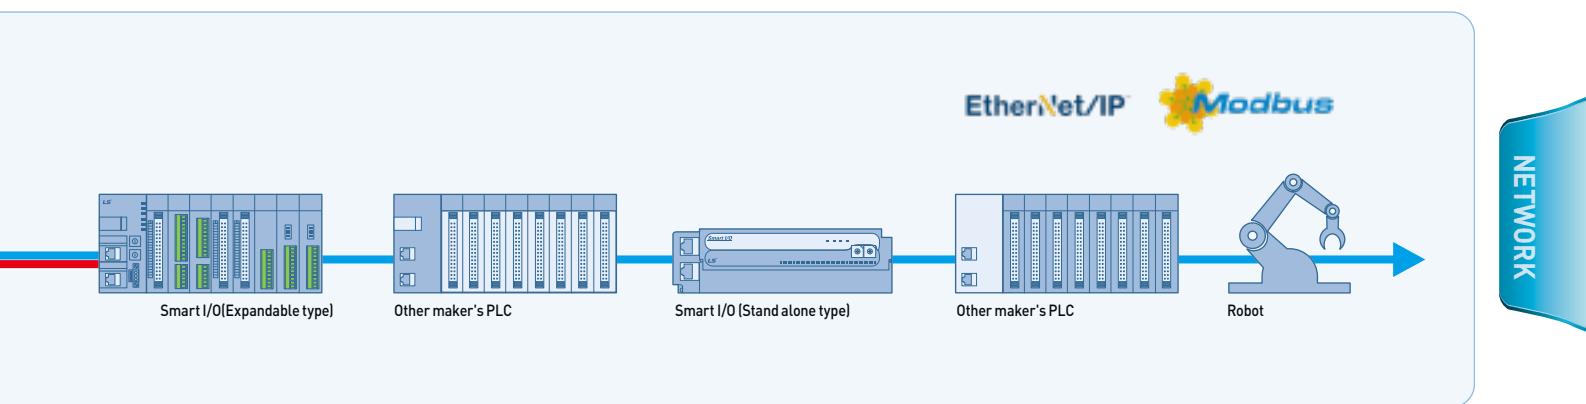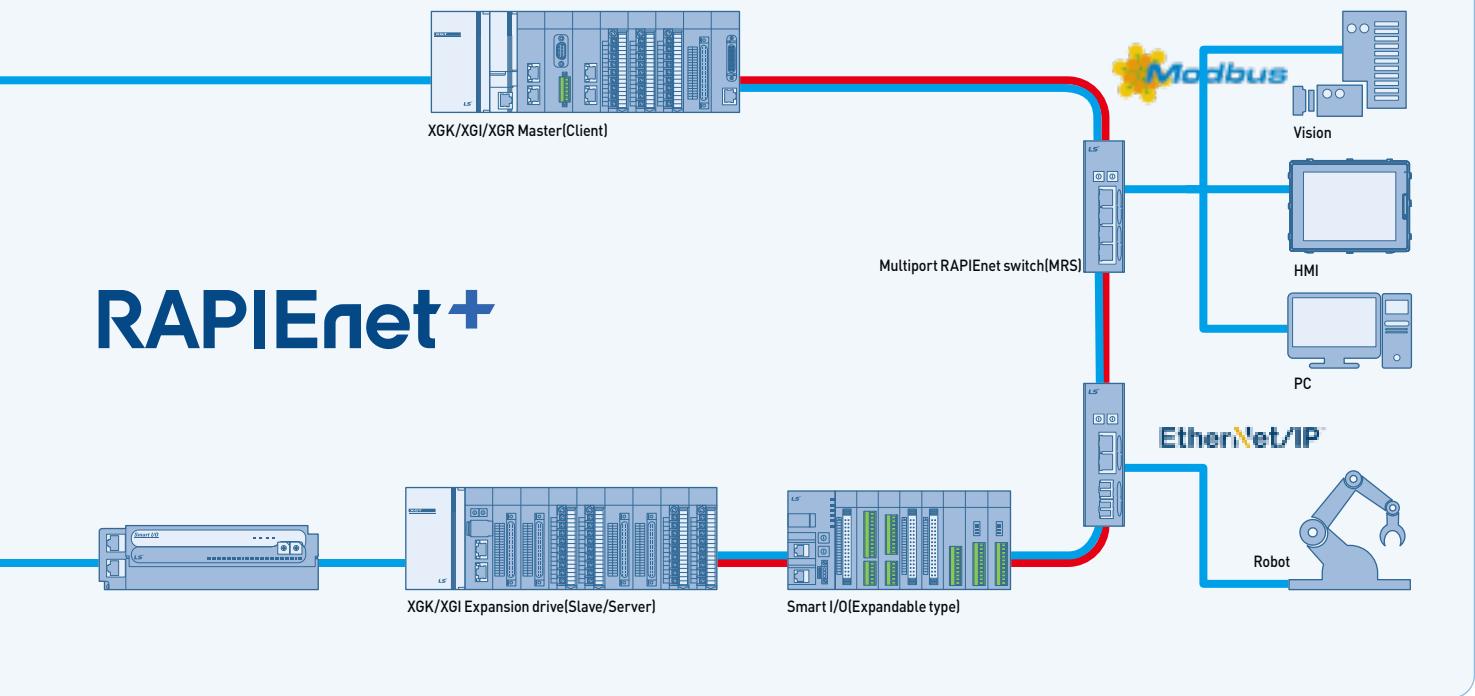

XGL-EFMTB, XGL-EFMFB, XGL-EFMHB

- Gigabit Ethernet (1Gbps)
- Two-port support
- Ring/Line topology configuration support:
no additional switch required
- Modbus TCP/IP, RAPIEnet (v6.0 or higher),
EtherNet/IP (v6.0 or higher) protocol support
- Max 5.000pps network load (based on server operation)
- Data processing speed: 1ms
- Various and convenient network system configuraion with
Smart Extension Service (v8.0 or higher)
- XG5000 network setup and programming (v4.30 or higher)
- User protocol editing and P2P service:
(network with third-party devices)
- Various diagnostic functions and module/
network status information
- Network module check function (Ping test)
- Network service information (HS link, P2P, media status, etc)
- OPC UA Server support (OPC UA Specification v1.03, XGL-EFMxB v7.0)
 - OS replacement for OPC UA Server of XGL-EFMxB in XG5000 is required.
(Please refer to user's manual).

**Specification**

Item			XGL-EFMTB	XGL-EFMFB	XGL-EFMHB		
Transm ission Specific ations	Transmission speed (Mbps)	10/100/1000		100/1000	Electric: 10/100/1000 Optical: 100/1000		
	Transmission method	Baseband					
	Maximum distance between nodes	100m (Node-Switch)	2km (Multi-mode)	Electric: 100m Optical: 2km			
	Send media	Electric: Category 5E or higher STP (Shielded Twisted-pair) cable Optical: Multi mode(MMF)/Single mode(SMF) cable					
	Maximum protocol size	1,500 Byte					
	Communication network access method	CSMA/CD					
	Frame error check method	CRC32					
Max. load			Ethernet: 10,000pps, RAPIEnet: 40,000pps				
Topology			Line, Tree, Star, Ring (RAPIEnet Enable)				
Diagnosis function			Station number / IP collision detection function, Diagnosis using XG5000				
Station number / IP setting method			Rotary switch, XG5000, BOOTP/DHCP				
Station number / IP setting range			Station number setting value set by the tool(XG5000) (0 to 220) - IP: 192.168.1.xx(xx:100 + rotary switch 1~99)				
External connecting terminal			RJ45, SFP : PADT connection, data communication				
Basic Specific	Current consumption (mA)	100Mbps	560	750	670		
		1Gbps	900	740	670		
	Weight(g)		146	130	120		

Network service specification

	Item	XGL-EFMTB	XGL-EFMFB	XGL-EFMHB
RAPIDnet	Data processing unit		Byte(8bit)	
	Max read/write data size		1,400 byte	
	Max No. of connected stations per network		221 stations (However, 64 stations are used for the Smart extension service.)	
EtherNet/IP	Data processing unit		Byte(8bit)	
	Max read/write data size		Non-periodic tag: 1,400 Byte Non-periodic object : 1,024 Byte Cycle 1,024 Byte	
	Available communication type		Connection-type (Cycle) messages: Class1 Non connection type(Non-periodic) message: Tag, Object	
Modbus / TCP	Maximum number of connections		Connection-type (periodic)+ Non connection type(Non-periodic):64	
	Data processing unit		Word(16bit),bit	
	Max read data size		125 Word(2,000 Bits)	
	Max write data size		123 Word(1,968 Bits)	
XGT dedicated	Maximum number of connections		64	
	Data processing unit		Byte(8bit)	
	Max read/write data size		1,400 byte	
	Maximum number of connections		64	

Smart extension master

Smart extension service is network service between LS Automation products to enable users to extend several PLCs and drives without network parameter and programming, including EtherNet/IP client service.

Smart Extension Setup Wizard	Users could do network setup easily with 'Smart Extension Setup Wizard' in XG5000.
Smart Extension Autoscans	Autoscans execution of network & control setting during online.
Remote Device Setting	* Automatic execution of I/O and Basic Parameter Setting via XGL-EFMxB (master) * Hot swap setting for slave module replacement
Smart Extension Diagnosis Flag	Diagnostic information service for network devices and modules of Smart Extension system
Remote network	Device IP/Station No. change Remote network device IP and station no. change during online based on user setting (master)

XGF-EOPCT

- OPC UA Server (OPC Unified Architecture, IEC 62541) communication protocol
- Max. 10 devices can be connected to OPC UA Client (Session)
 - Max. 50 subscription channels can be created, 10 per session
 - Max. 1,000 subscriptions per channel, up to 5,000 variables (MonitoredItem) can be registered
- History function that can store a total of 3,000 histories for up to 64 variables
- Alarm/Event (LimitLevel, OffNormal) function provided for up to 100 variables
- Provides various diagnostic functions and module/network status information
 - Status of communication module
 - Communication service (P2P, dedicated protocol server, OPC UA server) status
 - AutoScan function that provides information on our modules connected within the network
 - PING function to check the connection of other modules
 - Packet type and average packet transmission/reception data received by module (network load can be predicted)
 - Diagnostic function for communication module through network

**Specification**


Item			XGL-EOPCT
Transmission Specifications	Transmission speed (Mbps)		10/100/1000
	Transmission method		Baseband
	Maximum distance between nodes		100m (Node-Switch)
	Minimum distance between nodes		1m or more recommended Note1)
	Send media		Category 5E or higher STP (Shielded Twisted-pair) cable
	Maximum protocol size		1,500 Byte
	Communication network access method		CSMA/CD
	Frame error check method		CRC32
Max. load			10,000pps
Topology			Line, Tree, Star
Diagnosis function			IP collision detection function, Diagnosis using XG5000
Station number / IP setting method			XG5000, DHCP
External connecting terminals			word (16 bit), bit
Modbus/TCP Service Specific			125 word (2,000 bit)
			123 word (1,968 bit)
Basic Specific	Current consumption (mA)	100Mbps	560
		1Gbps	900
	Weight(g)		146

Note 1) When using a cable shorter than 1m, the SNR [Signal to Noise Ratio] may decrease due to the influence of reflected waves, which may result in link down or packing loss.

Communication service specification

Item	XGL-EOPCT		
Supported Security Profiles	Encryption setting (security policy)		<ul style="list-style-type: none"> No Security Basic 128Rsa15 Basic 256 Basic 256Sha256
	Signature setting (security mode)		<ul style="list-style-type: none"> None: no security Sign: add signature Sign & Encrypt: add signature and encryption
	User authentication setting		<ul style="list-style-type: none"> Anonymous User name/password
Max. number of installation	P2P Service	XGK/XGI	8ea
		XGR	6ea
	Server Service	XGK/XGI	24ea(Installed on the expansion base)
		XGR	6ea(Cannot be Installed on the expansion base)
Modbus / TCP	User authentication setting		Approximately 14,000 (Up to 1.5MB)
			10
	Max write data size		10 / 50
	Maximum number of connections		1000 / 5000
	Max read/write data size		20ms~1000ms
Maximum number of connections		20ms~1000ms	

System configuration (Example)

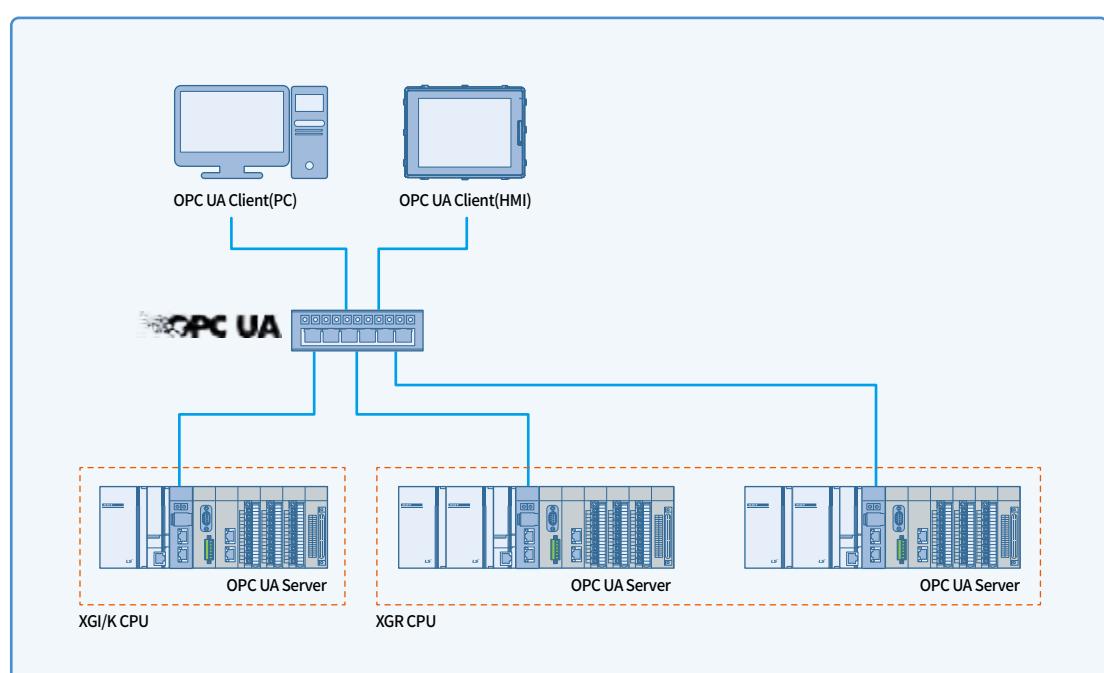

XGL-DBDT, XGL-DBDF, XGL-DBDH

- Large PLC system configuration with XGL-DBDx(slave module) installation on CPU slot of XGK/XGK main base
 - PLC extension system configuration: 63-stage network extension (XGT base extension: 7 stage)
 - Extension distance: electric 100m, fiber-optic 2km (XGT base extension: 15m)
 - I/O point: Max. 49,152 (XGT base extension: 6,144)
- Modbus TCP/IP, RAPIEnet, EtherNet/IP protocol simultaneous support
- Electric/Fiber-optic/Hybrid module comm. speed: Max. 1Gbps
- 2-port (dual port) support
 - No additional switch required for ring/line topology configuration
- Hot swap for base replacement (add/delete available)
 - Base replacement without system in case of extension base error
- Ring-to-line: fast reconfiguration to line topology for a line fault of ring
- Extension base power redundancy (with XGR extension base)
- Diagnostic function for service status

**Specification**

	Item	XGL-DBDT	XGL-DBDF	XGL-DBDH
Transmission Specifications	Transmission speed (Mbps)	100/1000	100/1000	Electric: 100/1000 Optical: 100/1000
	Transmission method	Base band		
	Maximum distance between nodes	100m@CAT5E or higher	2km@100Mbps.MM	Electric: 100m Optical: 2km
	Send media	Electric: Category 5E or higher STP (Shielded Twisted-pair) cable Optical: Multi mode(MMF)/Single mode(SMF) cable		
	Maximum protocol size	1,500Bytes		
	Communication network access method	CSMA/CD		
	Frame error check method	CRC32		
Max. load		Ethernet: 10,000pps, RAPIEnet: 40,000pps		
Topology		When using RAPIEnet : Lines, Ring (using MRS if you use a different topology) When not using RAPIEnet : Line, Tree, Star etc. (with switch)		
Diagnosis function		Station number/IP collision detection function, self-diagnosis service, diagnosis using XG5000		
Station number / IP setting method		Rotary switch, XG5000, BOOTP/DHCP		
Station number / IP setting range		Station number: Rotary switch(1 ~ 99) IP: 192.168.1.xx(xx:100 + rotary switch 1~99)		
External connecting terminal		USB mini B : PADT connection RJ45, SFP : PADT connection, data communication		
Status indication LED		PWR, RUN, SVR, I/F, RELAY, PADT, CHK, ERR, FAULT, LINK, ACT		
Parameter setting		XG5000(USB, Ethernet port)		
Device file		EDS file(Only EtherNet/IP)		
Maximum number of modules to be installed		12		

Network service specification

	Item	XGL-DBDT	XGL-DBDF	XGL-DBDH
RAPIEnet	Data processing unit		Byte(8bit)	
	Max read data size		1,400 Byte	
	Max write data size		1,400 Byte	
	Max No. of connected stations per network		64 station	
EtherNet/IP	Data processing unit		Byte(8bit)	
	Max read data size	Non-periodic tag: 1,400 Byte / Non-periodic object: 1,024 Byte / Cycle: 1,024 Byte		
	Max write data size	Non-periodic tag: 1,400 Byte / Non-periodic object: 1,024 Byte / Cycle: 1,024 Byte		
	Available communication type	Connection-type (Cycle) messages: Class1 Non connection type(Non-periodic) message: Tag, Object		
	Maximum number of connections	Connection-type (Cycle):10 Non connection type(Non-periodic) message(Tag, Object):10		
Modbus TCP/IP	Data processing unit		Word(16bit),bit	
	Max read data size		125 Word(2,000 Bits)	
	Max write data size		123 Word(1,968 Bits)	
	Maximum number of connections		64	

Available Module

	Item	I/O module		Item	I/O module
Digital	Input	XGI-D21A	Input	XGF-AD16A	
		XGI-D22A/B		XGF-AC4H	
		XGI-D24A/B		XGF-AW4S	
		XGI-D28A/B		XGF-DV4A	
		XGI-A12A		XGF-DV8A	
		XGI-A21A/C		XGF-DC4A	
		XGI-D21D		XGF-DC8A	
	Output	XGQ-RY1A	Output	XGF-DV4S	
		XGQ-RY2A/B		XGF-DC4S	
		XGQ-TR1C		XGF-DC4H	
		XGQ-TR2A/B		XGF-HO2A	
		XGQ-TR4A/B		XGF-HD2A	
		XGQ-TR8A/B		XGF-HO8A	
		XGQ-SS2A		XGF-RD4A	
Analog	Input	XGQ-RY1D	High-speed counter	XGF-RD4S	
		XGH-DT4A		XGF-TC4S	
		XGF-AV8A		XGF-RD8A	
		XGF-AC8A		XGF-AH6A	
		XGF-AD4S		XGF-TC4UD	
		XGF-AD8A		XGF-TC4RT	
	Input/Output		RTD & thermocouple		

GEL-D24C, GEL-DT4C1, GEL-TR4C1, GEL-RY2C, GEL-AV8C, GEL-AC8C, GEL-DV4C, GEL-DC4C

- Modbus TCP/IP, RAPIEnet, EtherNet/IP protocol support
- RJ45 connector
- Flexibility in network topology (ring, line)
 - Redundancy support in ring topology
- Simple module setting with station no. setup (No IP setup required)
- Easy & Simple parameter setup: Autoscan for module add, checkbox for parameter setup (No program required)
- High-speed data processing
- Cost reduction in wiring
- Various diagnostic service
 - Station no. collision error
 - Remote batch processing in O/S upgrade via master module
 - Network status check by CRC error flag
 - Enhanced Autoscan function: station collision, module information, etc.
 - Error flag: comm. error between master and Smart I/Os

**Specification**

	Item	Content
Transmission Specifications	Transmission speed	PORT1/2: 100Mbps
	Transmission method	Base band
	Maximum distance between nodes	100m@CAT5E or higher
	Send media	Electric: Category 5E or higher STP (Shielded Twisted-pair) cable
	Maximum protocol size	1,500Bytes
	Communication network access method	CSMA/CD
	Frame error check method	CRC32
Max. load		Ethernet: 10,000pps, RAPIEnet: 40,000pps
Topology		When using RAPIEnet: Lines, Ring (using MRS if you use a different topology) When not using RAPIEnet: Line, Tree, Star etc. (with switch)
Diagnosis function		Station number / IP collision detection function, self-diagnosis service, diagnosis using XG5000
Station number / IP setting method		Rotary switch, XG5000, BOOTP/DHCP
Station number / IP setting range		Station number: Rotary switch(1~99) IP: 192.168.1.xx(xx:100 + rotary switch 1~99)
Status indication LED		STATUS, PORT1, PORT2, LACTH(output Only)
Parameter setting		XG5000(Ethernet)
Device file		EDS file(Only EtherNet/IP)
Protocol		RAPIEnet, EtherNet/IP, Modbus-TCP, BOOTP, DHCP(RAPIEnet, EtherNet/IP can be Smart extension with XGL-EFMxB)
I/O Refresh size	Max inputs: refresh size	64 bytes
	Max outputs: refresh size	64 bytes

Network service specification

Item		Content
RAPIDnet	Data processing unit	Byte(8bit)
	Max read data size	1,400 byte
	Max write data size	1,400 byte
	Max No. of connected stations per network	64 station
EtherNet/IP	Data processing unit	Byte(8bit)
	Max read data size	Non-periodic tag: 1,400 Byte Non-periodic object: 1,024 Byte Cycle: 1,024 Byte
	Max write data size	Non-periodic tag: 1,400 Byte Non-periodic object: 1,024 Byte Cycle: 1,024 Byte
	Available communication type	Connection-type (Cycle) messages: Class1 Non connection type(Non-periodic) message: Tag, Object
	Maximum number of connections	Connection-type (Cycle) :10 Non connection type(Non-periodic) message(Tag, Object):10
Modbus TCP/IP	Data processing unit	Word(16bit),bit
	Max read data size	125 Word(2,000 Bits)
	Max write data size	123 Word(1,968 Bits)
	Maximum number of connections	64

Input/output specification

Item		GEL-D24C	GEL-DT4C1	GEL-TR4C1	GEL-RY2C		
Digital I/O	Points	32(Input)	16/16(In/Out)	32(Output)	16(Outputs)		
	Rated input current	5mA	-	-	-		
	Rated load voltage	-	DC24V	DC24V/AC220V, 2A/point, 5A/COM			
	Max. load current	-	0.5A/point, 3A/COM	AC250V, DC110V, 1,200times/hour			
	On voltage	DC 19V or higher	-	Min. switching load :			
	Off voltage	DC 6V or less	-	DC 5V/1mA			
	Insulation method	Photo coupler insulation					
Item		GEL-AV8C	GEL-AC8C	GEL-DV4C	GEL-DC4C		
Analog I/O	Channels	8		4			
	Input/output type	Voltage	Current	Voltage	Current		
	Input/output range	1 ~ 5V	4 ~ 20mA	1 ~ 5V	4 ~ 20mA		
		0 ~ 5V		0 ~ 5V			
	Accuracy	0 ~ 10V	0 ~ 20mA	0 ~ 10V	0 ~ 20mA		
		-10 ~ 10V		-10 ~ 10V			
	Max. resolution	0.3% (ambient air temperature 0 ~ 55°C)					
Max. conversion rate		1/16,000					
Insulation method		10ms / channels					
		insulation between input / output terminal and PLC power (no insulation between channels)					

XEL-BSSRT, XEL-BSSRF, XEL-BSSRH

- Slave PLC system configuration: XEL-BSSRx (extension Smart I/O adaptor) with XGB I/Os (DI/DO/AI/AO)
 - No. of XGB extension I/O: 8
- Modbus TCP/IP, RAPIEnet, EtherNet/IP protocol support
- Electric/Fiber-optic/Hybrid module comm. speed: Max. 1Gbps
- 2-port (dual port) support
 - No additional switch required for ring/line topology configuration
- Ring-to-line: fast reconfiguration to line topology for a line fault of ring
- Diagnostic function for service status

**Specification**


	Item	XEL-BSSRT	XEL-BSSRF	XEL-BSSRH			
Transm ission Specific ations	Transmission speed (Mbps)	100/1000	100/1000	Electric: 100/1000 Optical: 100/1000			
	Transmission method	베이스밴드					
	Maximum distance between nodes	100m@CAT5E or higher	2km@100Mbps.MM	Electric: 100m Optical: 2km			
	Send media	Electric: Category 5E or higher STP (Shielded Twisted-pair) cable Optical: Multi mode(MMF)/Single mode(SMF) cable					
	Maximum protocol size	1,500Bytes					
	Communication network access method	CSMA/CD					
	Frame error check method	CRC32					
Max. load	Ethernet: 10,000pps, RAPIEnet: 40,000pps						
Topology	When using RAPIEnet : Lines, Ring (using MRS if you use a different topology) When not using RAPIEnet : Line, Tree, Star etc. (with switch)						
Diagnosis function	Station number / IP collision detection function, self-diagnosis service, diagnosis using XG5000						
Station number / IP setting method	Rotary switch, XG5000, BOOTP/DHCP						
Station number / IP setting range	Station number: Rotary switch(1 ~ 99) IP: 192.168.1.xx(xx:100 + rotary switch 1~99)						
External connecting terminal	USB mini B : PADT connection RJ45, SFP : PADT connection, data communication 3pin Push in/Screw fixed type connector : power Input						
Status indication LED	RUN, RMS, RNS, RELAY, LINK/ACT1, LINK/ACT2 6 types						
Parameter setting	XG5000(USB, Ethernet)						
Device file	EDS file(Only EtherNet/IP)						
Maximum number of modules to be installed	8ea						
Protocol	RAPIEnet, EtherNet/IP, Modbus-TCP, BOOTP, DHCP (RAPIEnet, EtherNet / IP can be Smart extension with XGL-EFMxB)						

Network service specification

	Item	XEL-BSSRT	XEL-BSSRF	XEL-BSSRH
RAPIDnet	Data processing unit		Byte(8bit)	
	Max read data size		1,400 Byte	
	Max write data size		1,400 Byte	
	Max No. of connected stations per network		64 station	
EtherNet/IP	Data processing unit		Byte(8bit)	
	Max read data size	Non-periodic tag: 1,400 Byte / Non-periodic object: 1,024 Byte / Cycle: 1,024 Byte		
	Max write data size	Non-periodic tag: 1,400 Byte / Non-periodic object: 1,024 Byte / Cycle: 1,024 Byte		
	Available communication type		Connection-type (Cycle) messages: Class1 Non connection type(Non-periodic) message: Tag, Object	
	Maximum number of connections		Connection-type (Cycle): 10 Non connection type(Non-periodic) message(Tag, Object): 10	
Modbus TCP/IP	Data processing unit		Word(16bit),bit	
	Max read data size		125 Word(2,000 Bits)	
	Max write data size		123 Word(1,968 Bits)	
	Maximum number of connections		64	





Available XGB I/O Module

	Item	Module		Item	Module
Digital	Input	XBE-DC08A	Output	XBF-DV04A	
		XBE-DC16A/B		XBF-DC04A	
		XBE-DC32A		XBF-DC04B	
		XBE-AC08A		XBF-DV04C	
	Output	XBE-TN/TP08A		XBF-DC04C	
		XBE-TN/TP16A		XBF-AH04A	
		XBE-TN/TP32A		XBF-RD04A	
		XBE-RY08A/B		XBF-RD01A	
		XBE-RY16A		XBF-TC04B	
	Input/output	XBE-DR16A	TC	XBF-TC04S	
		XBE-DN32A		XBF-LD02S	
Analog	Input	XBF-AD04A		XBF-HO02A	
		XBF-AD08A		XBF-HD02A	
		XBF-AD04C			
Analog	Output	XBF-AD04A	RTD		
		XBF-AD08A			
		XBF-AD04C			

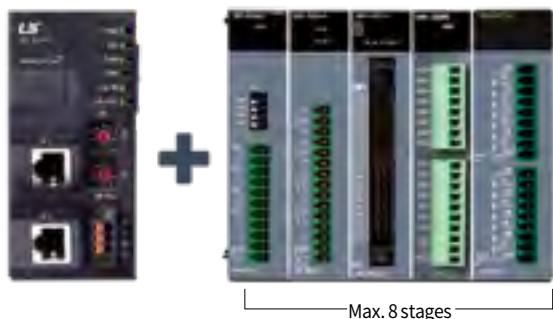

XOL-ES4T, XOL-ES4H

- Multi-port switch to integrate RAPIEnet, Modbus TCP/IP and EtherNet/IP network
- Max. 64 stations including master module
- Simple module setup with station no.: no additional S/W required.
- Module status information in XG5000 (Autoscan)
- Available from RAPIEnet v2.0 or later.

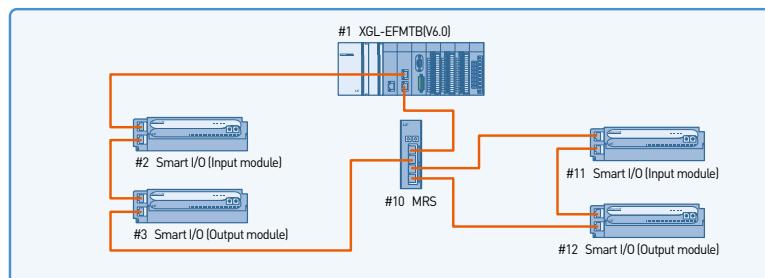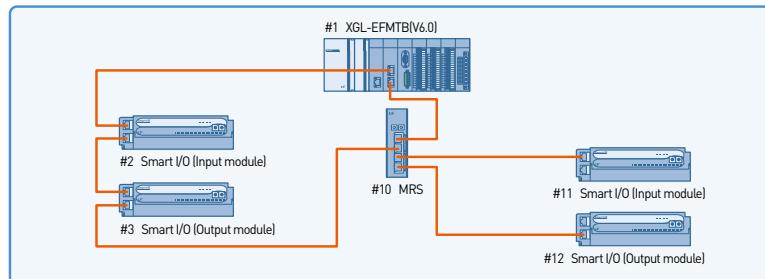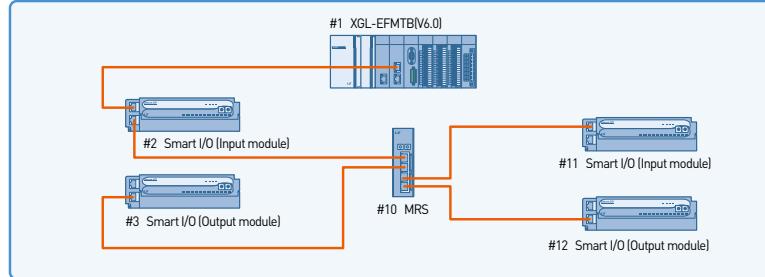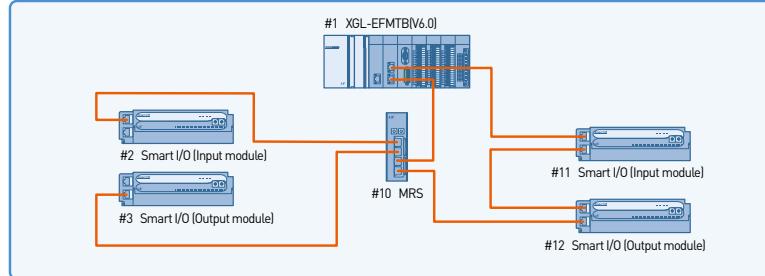
**Various system methods can be configured by using MRS****2 Ring System (Ring to Ring)****1 Ring / 1 Line System (Ring to Line)****2 Line System (Line to Line)****1 Line / 1 Ring System (Line to Ring)**

Specification


Item		RAPIEnet	
		XOL-ES4T	XOL-ES4H
Transmission Specifications	Transmission speed	100Mbps(1,2 port) 100Mbps/1 Gbps(3,4 port)	100Mbps/1 Gbps (1,2 port, electric) 100Mbps/1 Gbps (3,4 port,optical)
	Port type and number of ports	RJ45 4Ports	RJ45 2Ports, LC 2Ports
	Transmission distance	100m	100m/2km
	Diagnosis function	LED display	LED display
Basic Specifications	Power supply(DC)	24V(Input range:20.4~28.8V)	
	Current consumption(mA)	300	300
	Weight(g)	200	280

Various system methods can be configured by using MRS (Ethernet compatibility)

RAPIEnet[1,2 Port], Ethernet[3,4 Port]

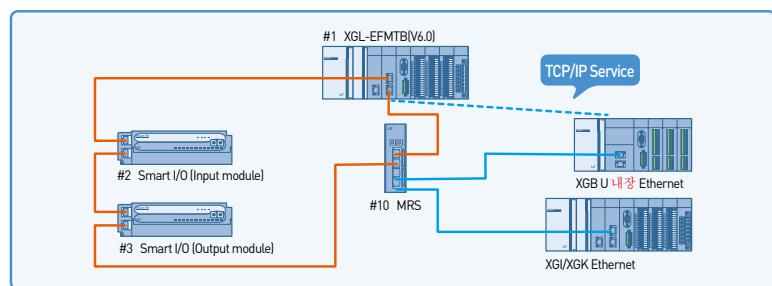


Ethernet[1,2 Port], RAPIEnet[3,4 Port]

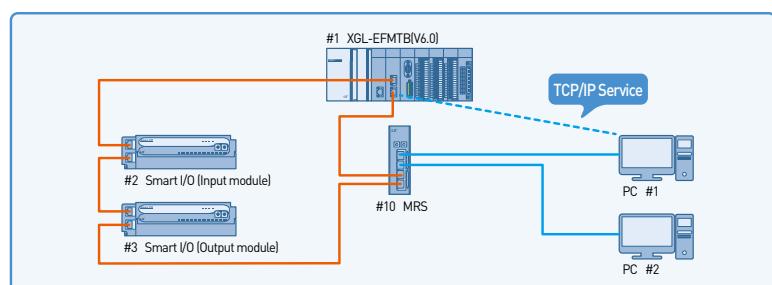


Ethernet, RAPIEnet[1,2 Port],

Ethernet[3,4 Port]

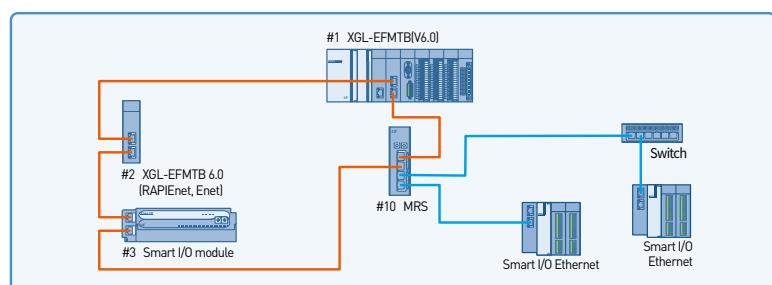

RAPIEnet, Ethernet[1,2 Port],

RAPIEnet, Ethernet[3,4 Port]

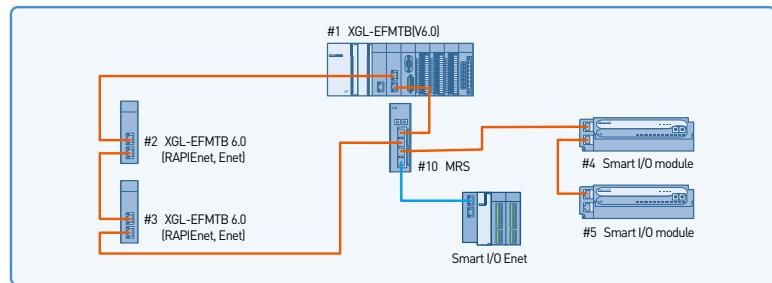

XOL-RCPUA


- Connect to RAPIEnet+ network from a PC
- Easy installation to PCIe slot on a PC
- Simple driver installation

**Specification**


Item		XOL-RCPUA	Remark
Data Memory	I Variable	16KB	
	Q Variable	16KB	
Direct variable	M	1MB	
	W	512KB	
Flag variable	F	8KB	System Flag
	L	22KB	Link Flag
	U	4KB	Analog data refresh
	N	49KB	P2P Parameters
Operation Mode		RUN, STOP	
Restart Mode		Cold, Warm	
Programming Port		USB(1Ch), Ethernet (1Ch)	
Weight (g)		200	

RAPIEnet+ System Configuration with XOL-RCPUA


Ring topology with Ethernet/IP and Modbus configured through RAPIEnet+

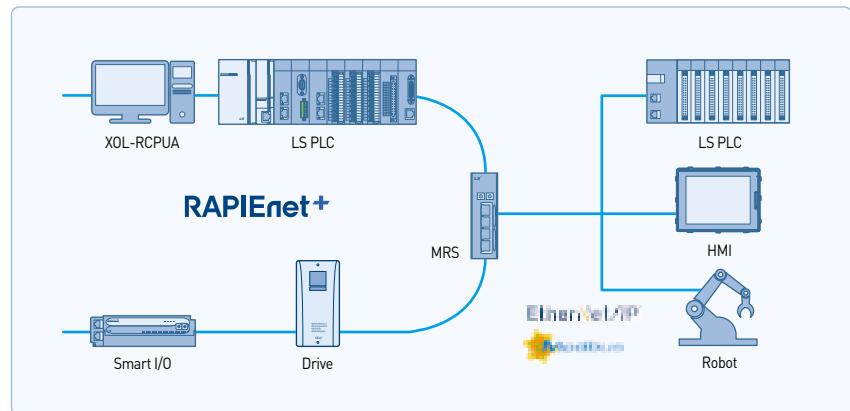

Daisy Chain configuration with RAPIEnet+, Ethernet/IP, or Modbus

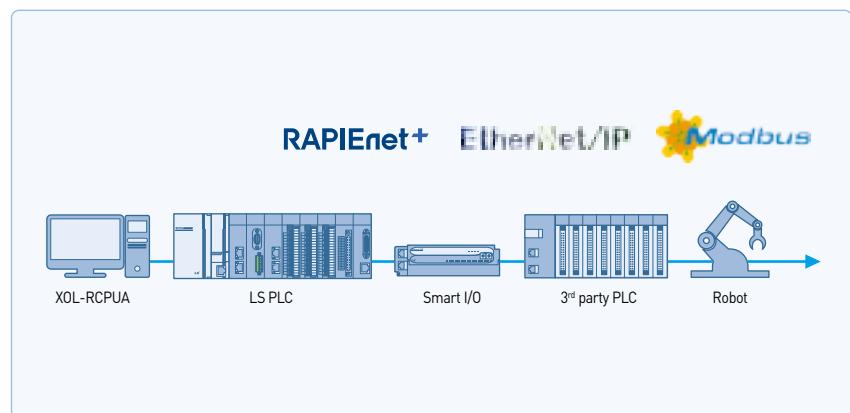

Star topology configuration with Ethernet/IP or Modbus

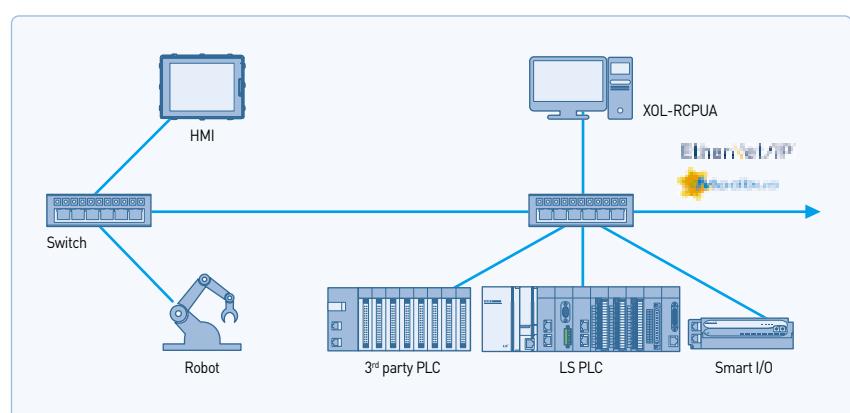

XGL-C22B, XGL-CH2B, XGL-C42B


- Smart server recognizes the protocol (XGT dedicated communication or Modbus RTU/ASCII) automatically and operates.
- Repeater mode is able to use as an insulated repeater or convert RS-232C to RS422/485.
- Contains built-in termination resistor and it can be set in the basic parameter window.
- Easy protocol editing and communication parameter setting: XG5000
- Long-distance communication via modem connection
- Dedicated protocol for multi-drop configuration connectable up to 32 units
- RS-232C/422 communication port
- Flexible communication speed setting (300~115,200bps)
- Supporting full duplex and half duplex communication
- Max. 12 modules available in one CPU
- P2P service: User-defined communication and XGT/Modbus master
- Various connection to MMI S/W(XGT, Modbus RTU, Modbus ASCII)
- Various diagnosis functions using XG5000 (I/O, link status, service status)
- Communication service information (Dedicated service, P2P service)
- Supporting simultaneously dedicated service in remote connection
- Communication without additional setting when replacing communication module




Various independent operation mode

- Operation mode
- Dedicated protocol mode (Simultaneous support)
- Program upload/download by XG5000 protocol (RS-232C)
Communication using LS ELECTRIC dedicated protocol
- User-defined communication of P2P mode and XGT/Modbus master

Communication via RS-232C/422

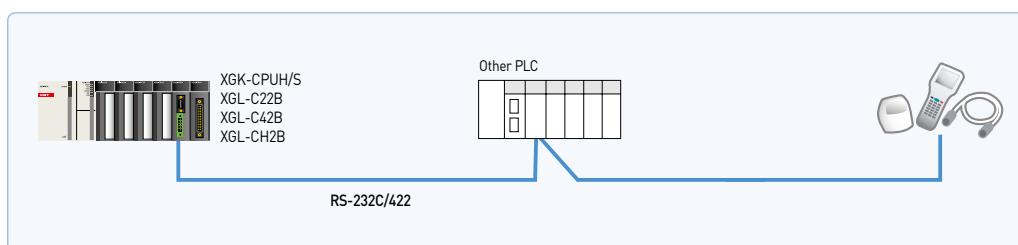

1: N and N: M connection (LS ELECTRIC and other)

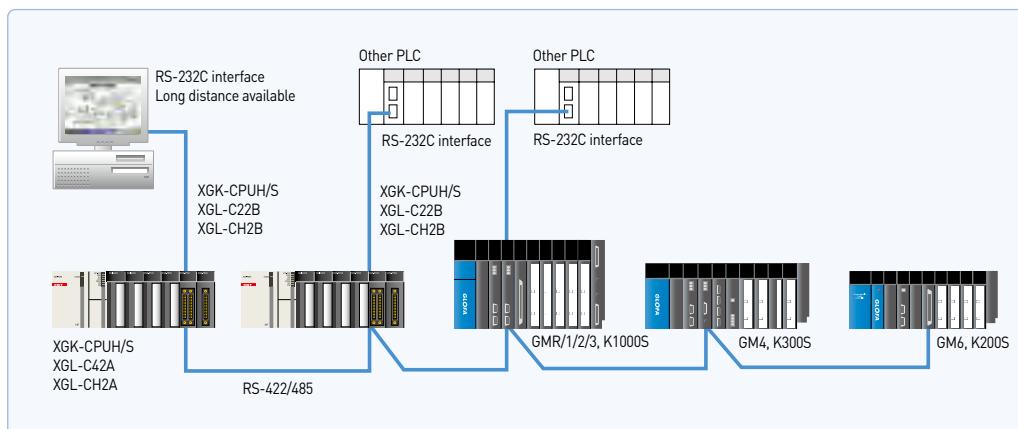


Specifications


Item		Specification			
		XGL-C22B	XGL-CH2B	XGL-C42B	
Serial communication channel	RS-232C	2 channels	1 channel	-	
		Conforms to RS-232C standard			
	Line config	1:1		-	
	RS-422/485	1 channel			
		Conforms to RS-422/485 standards		1:1, 1:n, n:1	
Modem connection function		Remote communication with external devices is available via public telephone line by connecting external modem to the module.			
Operating mode (specified per port)	P2P	XGT client, Modbus ASCII/RTU client, User defined communication			
	SERVER	XGT server, Modbus ASCII/RTU server			
Data type	Start Bit	1			
	Data Bit	7 or 8			
	Stop Bit	1 or 2			
	Parity	Even/Odd/None			
Synchronization type		Asynchronous type			
Detecting error		BYTE SUM, WORD SUM, BYTE XOR, DLE AB, DLE SIEMENS, LS ELECTRICCRC, CRC 16, BYTE SUM 2' COMP, BYTE SUM 1's COMP 7BIT SUM, 7BIT XOR, CRC 16 IBM, CRC 16 CCITT			
Transmission speed (bps)		300/600/1,200 / 1,800 / 2,400 / 3,600 / 4,800 / 7,200 / 9,600/19,200 / 38,400 / 57,600 / 64,000 / 76,800 / 115,200 bps			
Station No. setting		Setting range : 0-31, Max. station No. : 32 stations			
Transmission Distance(m)	RS-232C	Max.15 (extendible if modem used)		-	
	-	RS-422/485: Max. 1,200m			
Diagnosis function		Status LED diagnosis XG5000 diagnosis service(Frame monitor, Status by service, Loop-Back diagnosis) History, Saving history			
Appearance size(mm)		98(H) X 27(W) X 90(D)			
Current consumption(mA)		420	480	520	
Weight(g)		121	119	116	

* XGL-CH2A / C42A and XGL-CH2B / C42B differ from RS-422 / 485 communication connector wiring, you refer to the operation manual.

Modbus

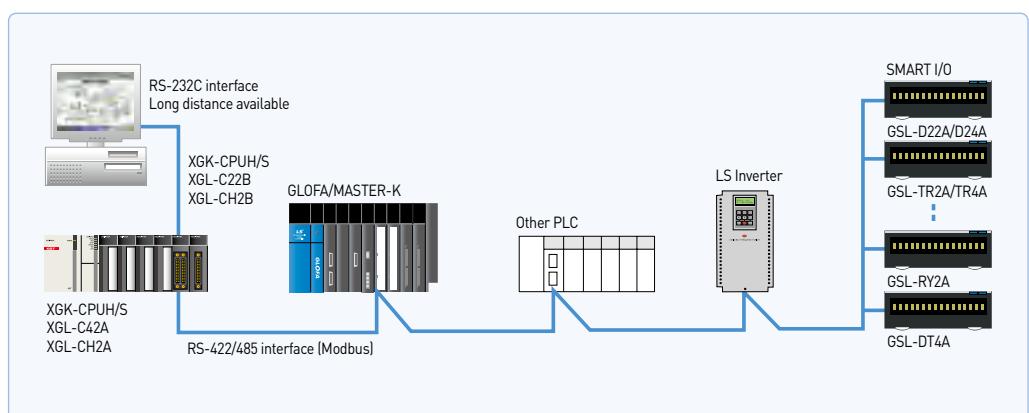

Cnet cable connection

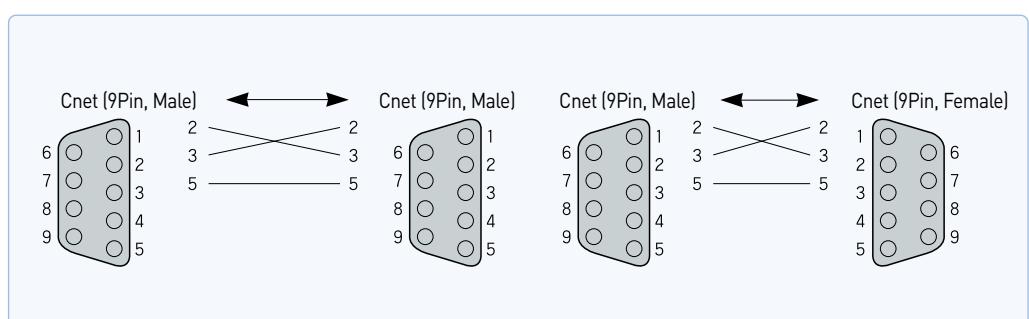


**XGL-DMEB,
XGL-DSEB**



- DeviceNet protocol
- Direct control of various I/O devices via Dnet system
- Max. 63 slave modules controlled by one master module
- Flexibility in network configuration: Multi-drop and T branch connection
- Connectable to other master module and various slave modules
- Providing 'Auto Network Scan' function and various information with configuration tool (N Configurator)
- Communication using High-speed link parameter
- Connectable to various slave I/O including other module
(Common I/O, Actuator, Switch, Optical switch, Valve, Inverter, A/D module, Position controller etc..)
- Automatic monitoring of slave modules in the network: Auto-scan (XG5000)
- Easy expansion: up to 12 master modules
- Network setting by N Configurator/XG5000(Parameter setting, diagnosis and monitoring)


**System
configuration with
LS ELECTRIC
products**

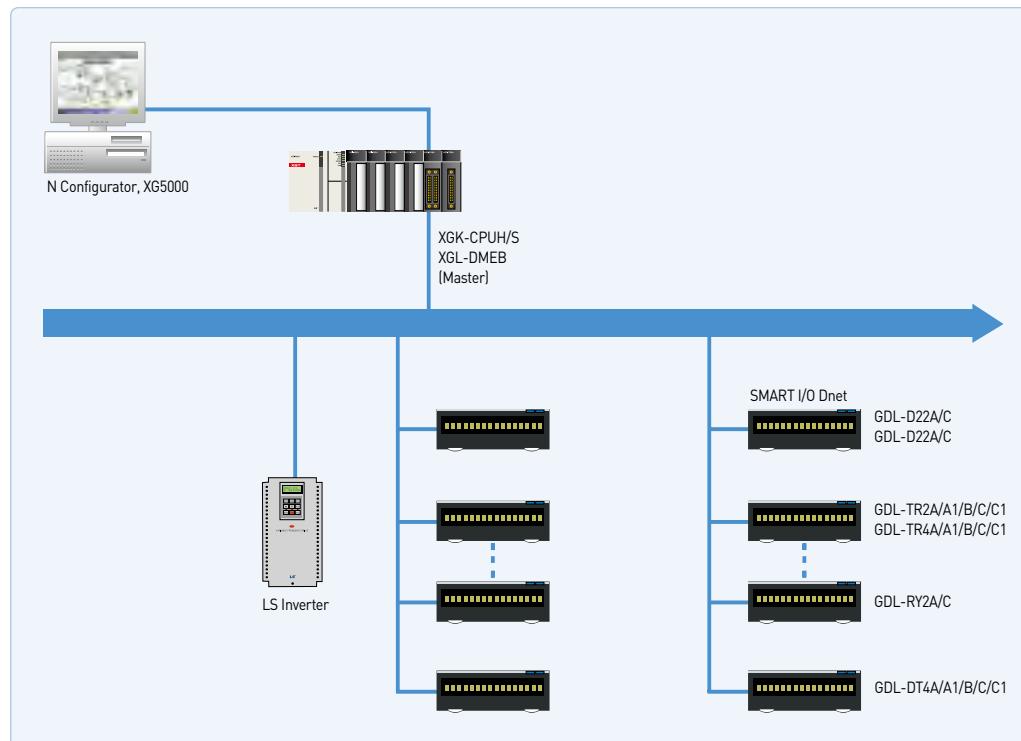

Specifications


Item		Performance Specifications
Transmission Specification		125/250/500
Transmission Type	I/O Connection	G2, UCMM
	I/O Communication	Poll, Bit strobe, COS, Cyclic
Communication distance(m)	Thick Cable	500 (125kbps)/250 (250kbps)/100 (500kbps)
	Thin Cable	100 (125/250/500kbps)
Terminal resistance [W]		121 (1%, 1/4W)
	125 kbps	6 (Max. extended length 156)
Max.drop length(m)	250 kbps	6 (Max. extended length 78)
	500 kbps	6 (Max. extended length 39)
Data Packet		0~8 Bytes
Message Access Control		CSMA/NBA
Network Structure		Trunk/drop line Power/Signal cable inside the identical network cable
Bus Type		Poll type
Max. number of nods		Up to 64 (including master) MAC IDs (MAC Identifier)
System Features		Insertion and removal of nod available in voltage On status
Operation Voltage		DC 24V
Diagnosis Function		Module: Checks duplicated station/ Checks CRC error N Configurator: Detects defective station/Checks BusOff/Auto-scan function XG5000: Monitors High-speed link
Master/Slave Operation		Available only in master
Parameter setting		1) N Configurator (CONFIG Port of Dnet I/F) 2) Setting to High-speed link of XG5000 (RS-232C of CPU module or USB port)
XG5000 (High-speed link)	Data process unit	Byte
	Send/Receive period	Select among 20ms, 50ms, 100ms, 200ms, 500ms, 1s, 5s and 10s - Default : 20ms
	Max. communication point	Send 128,520points, Receive 128,520 points, 16,065 bytes respectively
	Max. block number	63 (Setting range: 0~62)
	Max. point number per block	2040 points (255 bytes)
	Max. modules installed	Up to 12 (available on basic base and added base)
	Internal-consumed current (mA)	350mA
Basic Specification	Weight (g)	81g

System configuration with other products

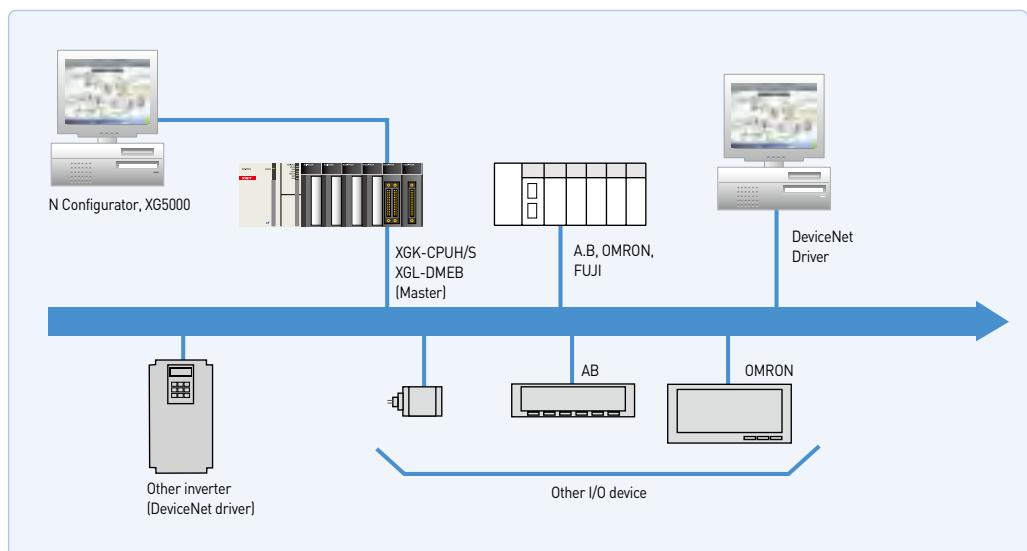

XGL-PMEB


- Profibus-DP protocol
- Proper to communicate among a master automation device and distributed slave I/O devices.
- Fast slave communication without application layer
- Transmission speed: 9.6Kbps ~ 12Mbps
- Transmission distance: Max. 1,200m
- Max. 126 slave stations available (32 stations per segment)
- Network setting using N Configurator / XG5000 (Parameter setting, diagnosis and monitoring)
- I/O data of master station: 7kbytes
- Automatic monitoring of slave modules in the network: Auto-scan (XG5000)
- Multi master
- Easy configuration tool : N Configurator / XG5000

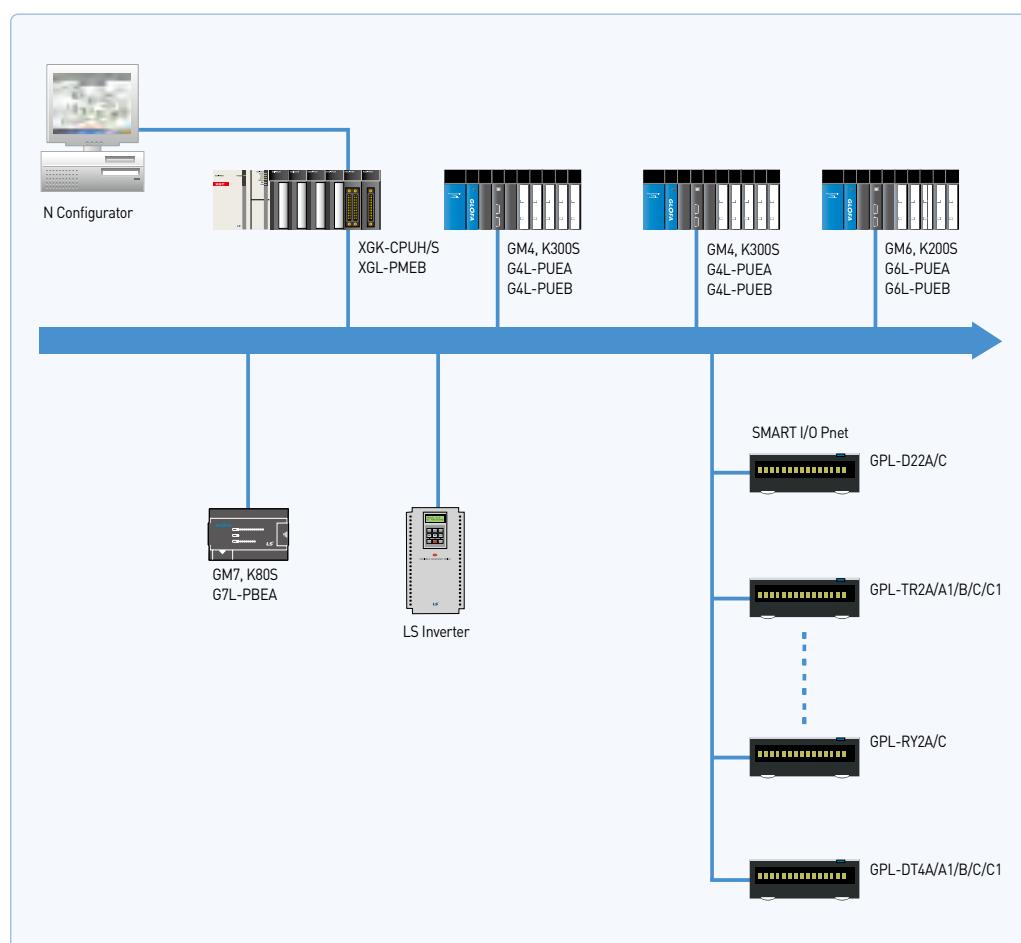
System configuration with LS ELECTRIC products


Specifications


Item	XGL-PMEB	
Module Type	Master	
Network Type	Profibus-DP	
Standard	EN50170/DIN19245	
Interface	RS-485 (Electric)	
Transmission Route	Bus type	
Modulation Type	NRZ	
MAC	Local Token Ring	
	Distance (m)	Transmission Speed (bps)
Max. Distance & Transmission Speed	1,200	9.6k/19.2k/31.25k/45.45k/93.7k
	1,000	187.5k
	400	500k
	200	1.5M
	100	3M/6M/12M
Max. number of stations per network	126	
Max. number of stations per segment	32 (including master & repeater)	
Max. number of modules per node	24 modules	
Cable used	Electric-twist shielded pair cable	
Max. communication size	7 KB	
Max. size per slave	244 bytes	
Max. number of units to be installed	XGK-CPUH/XGI-CPUU	XGK-CPUS/CPUA/CPUE
	12	12
Installation Position	XGK-CPUH/XGI-CPUU	XGK-CPUS/CPUA/CPUE
	Basic base ~ expansion stage 7	Basic base ~ expansion stage 3
Communication Parameters to set	XG5000 , SyCon (XGL-PMEA Dedicated Configuration Tool), N Configurator XGL-PMEB/C Dedicated Configuration Tool)	
Internal-consumed current(mA)	500	
Weight (g)	88	

System configuration with other products

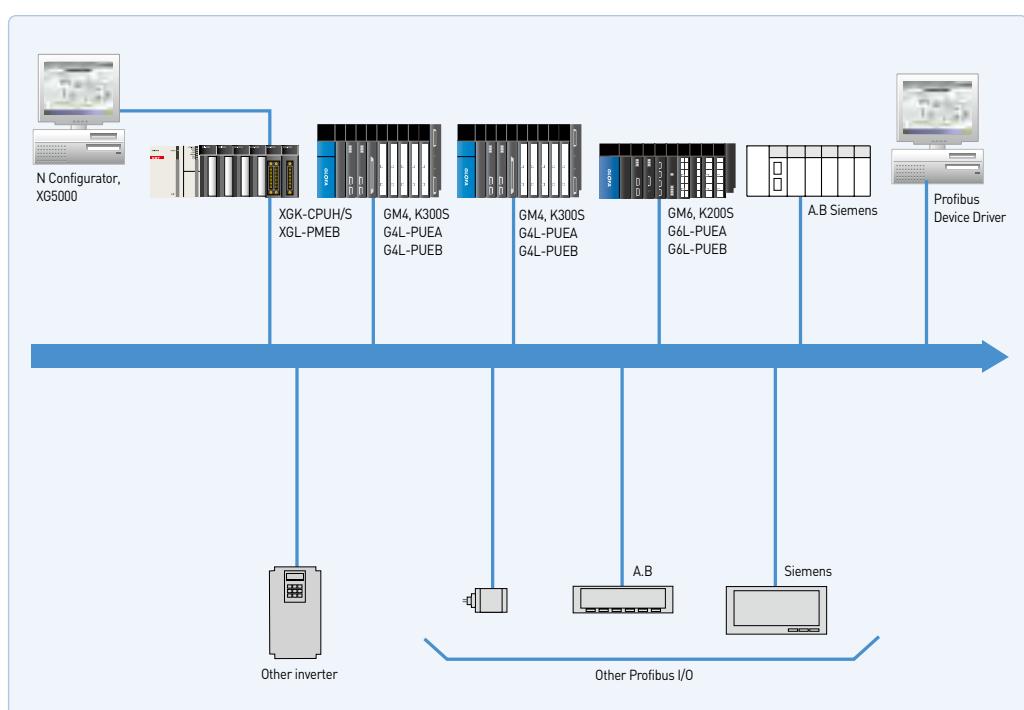

XGL-PSEA

- Profibus-DP
- Max. 98 stations available
- Other product Master <> Pnet Slave I/F Module connect
- I/O configuration through XG5000 high-speed link parameter
- Provides online network status monitoring
- Global Command
 - Sync, Unsync, Freeze, Unfreeze

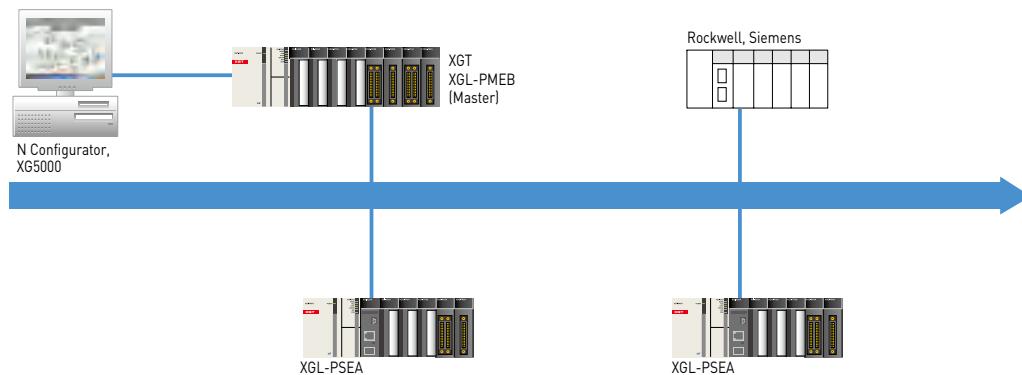**System configuration with other products****Specifications**

Item		XGL-PSEA							
Standard		EN50170 / DIN 19245							
Interface		RS-485(Electric)							
Media access		Polling							
Topology		Bus							
Modulation		NRZ							
Network Interface		Auto baud rate							
Master / Slave		Slave							
Max. number of slave per network		99							
Max. number of slave per segment		32							
Cable		Shield twisted pair cable							
Max. I/O data		244 byte							
Configuration tool		XG5000							
Transmission distance and speed	Trans. speed(kbps)	9.6	19.2	93.75	187.5	500			
	Max. network length(m)	1200	1200	1200	1000	400			
	Trans. speed(kbps)	1500	3000	6000	12000	-			
	Max. network length(m)	200	100	100	100	-			
Max num. of node		99[0~98]							
Max num. of transmission block		24							
Max num. of installation		12ea (XGR: Max. 6ea)							
Installation		XGK-CPUU/H, XGI-CPUU		Main base ~ 7 th Expansion base					
		XGK-CPUE, XGI-CPUE		Main base ~ 1 st Expansion base					
		XGK-CPUA/S, XGI-CPUH/S		Main base ~ 3 rd Expansion base					
		XGR-CPUH/F, XGR-CPUH/T		Main base					
Current consumption (mA)		410							
Weight (g)		103							

Profibus-DP [Pnet] Remote I/F system


Programmable Logic Controller 72 / 73

XGL-PSRA

- Profibus-DP
- Remote base implementation
- Max. 98 stations available
- Various I/O module
 - DI/DO module
 - AI/AO/RTD/TC module
- Provides online network status monitoring
- Hot swap function



System configuration with other products

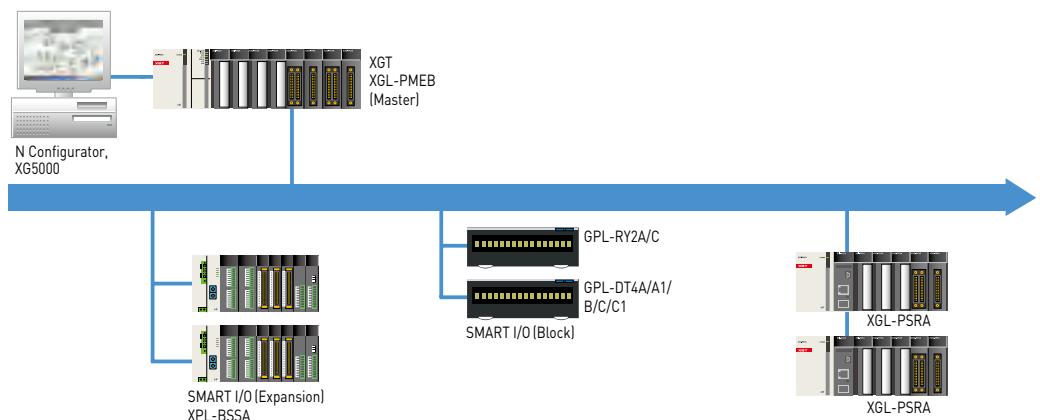


Specifications

Item		XGL-PSRA				
Standard		EN50170 / DIN 19245				
Interface		RS-485(Electric)				
Media access		Polling				
Topology		Bus				
Modulation		NRZ				
Network Interface		Auto baud rate				
Master / Slave		Slave				
Max. number of slave per network		100				
Max. number of slave per segment		32				
Cable		Shield twisted pair cable				
Max. number of communication points		244 byte				
Transmission distance and speed	Trans. speed(kbps)	9.6	19.2	93.75	187.5	500
	Max. network length(m)	1200	1200	1200	1000	400
	Trans. speed(kbps)	1500	3000	6000	12000	-
	Max. network length(m)	200	100	100	100	-
Max num. of node		100[0~99]				
Max. number of installation		12				
Max. digital I/O		768				
Max Analog I/O Channel		Input : 122ch. / Output : 96ch				
Current consumption (mA)		600				
Weight (g)		114				

XGL-RMEB

- Communication speed: 1Mbps
- Communication distance: Max. 750m
- Available to use max. 6 repeaters (Up to 5.25Km)
- Network management using Auto-scan
(Slave module information)
- Multi-drop network with smart I/O
- Network diagnosis and monitoring by XG5000
- Max. 63 stations of slave modules controlled
by one master module

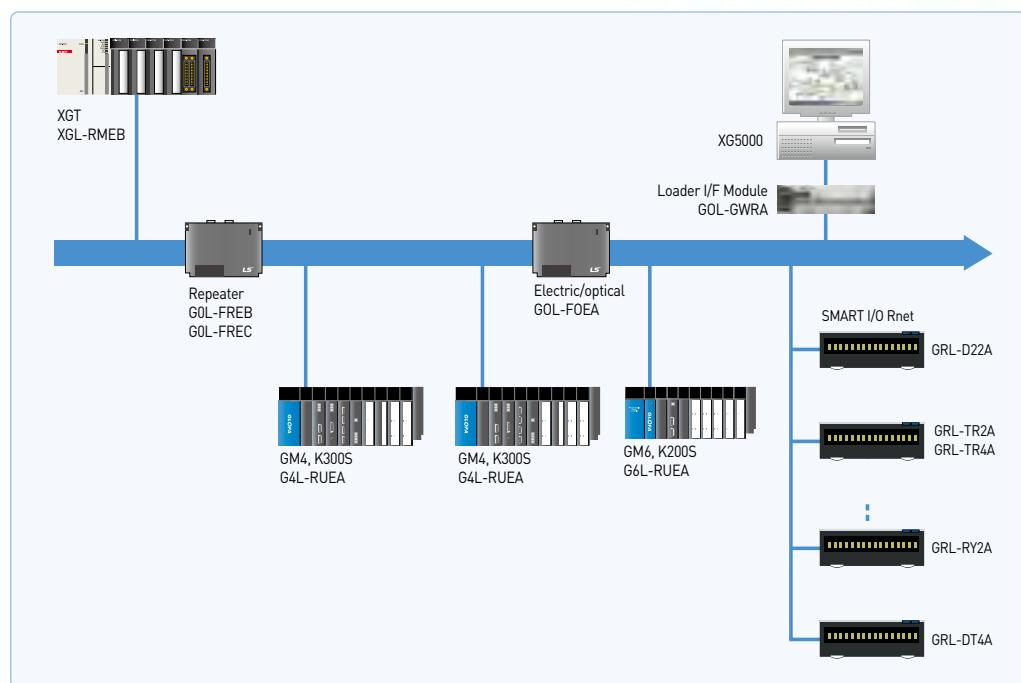**System configuration****Specifications**

Item		Specifications
Transmission Speed		1Mbps [Rnet I/F modules common]
Max. Tx distance		Max. 750m
Connection Cable		Twisted pair shielded cable - LIREV-AMESB 1Px22AWG (7/0.254)LS Cables
Maximum stations connected	Network	Master station 1 [station no:0(fixed)] + Slave station 31 [station no:1-63] = Max. 32 stations (In case of 32 stations, you have to use repeater.) - Only 1 master is available in the network.
Diagnostic function		XG5000 : High Speed Link Monitoring
System characteristic		Available detachment and attachment of slave module during communication
Terminal resistance(Ω)		110(5%,1/2W)
Master/Slave operation		Only available as Master
XG5000 (HS Link)	Data Processing unit	Byte
	Tx/Rx cycle	Selection among 20ms, 50ms, 100ms, 200ms, 500ms, 1s, 5s, 10s(default :200ms)
	Max. Communication points.	3,720bytes(Slave 31stations * 120bytes/station)
	Max. Block number	63(setting range : 0~62)
	Max. points by Block	120 Byte(60words)
	Max. Tx. Block number	32 Blocks
Specification	HS Link number	Max. 12
	Max. module mounted	12 modules(Main Base + Extension Base)
	Internal current consumption(mA)	410
	Weight(g)	115

SMART I/O

- Reduction of wiring and real-time control of distributed I/O
- Various I/O module (16/32 points)



Repeater specifications

Item	Specifications
Type	GOL-FREB: AC110V ~ AC220V, GOL-FREC: DC 24V
Communication speed	1Mbps
Transmission method	Twisted pair shield cable
Transmission distance	Max. 750m per repeater
Max. number of installation between stations	Max. 6 repeaters
Max. distance between stations	5.25Km (when 6 repeaters are installed)
Fault data reception	Error data transmission
Frame error check	CRC 16 check

Network cable and peripheral devices


Item	Specifications	Remarks
Twisted pair electric	cable LIREV-AMESB, 2 1mm, 18AWG	LS cable
RF terminator	110 , 1/2 W	

XGL-FMEA

- Dedicated network for LS PLC
- Easy high-speed link parameter setup
- 1Mbps high-speed communication
- Max. 750m
- Max. 6ea repeater available (Max. expansion 5.25km)
- Network management through Auto scan
- Max. 12ea on 1ea base
- Deterministic Network through Token Passing & Broadcasting
- 3,840 Word for each station
(Send 1920 Word /Receive 1920 Word)
- Max. number of block: Send 32blocks, Receive 64blocks, 60words for each block
- Max. communication points: 3840words
(64block×60word)
- Setup: Parameter download via XG5000
- Diagnosis by XG5000: Communication module information, High speed link fault, Auto scan

**Specification**

Item	Description
Communication speed	1Mbps
Encoding method	Manchester Biphasic-L
Transmission length (for one segment)	Max. 750m
Transmission length (via repeater)	Max. 750m (6ea repeaters+1)=5.25km
Transmission cable	Twisted pair shield cable
Max. number of connection	64stations (32stations /segment, 64stations for repeater)
Max. protocol size	256 bytes
Access method	Circulated Token Passing
Frame error check	CRC 16 check
Max. number of installation	12ea
Installation base	Main base or expansion base
Current consumption (mA)	410
Weight (g)	120

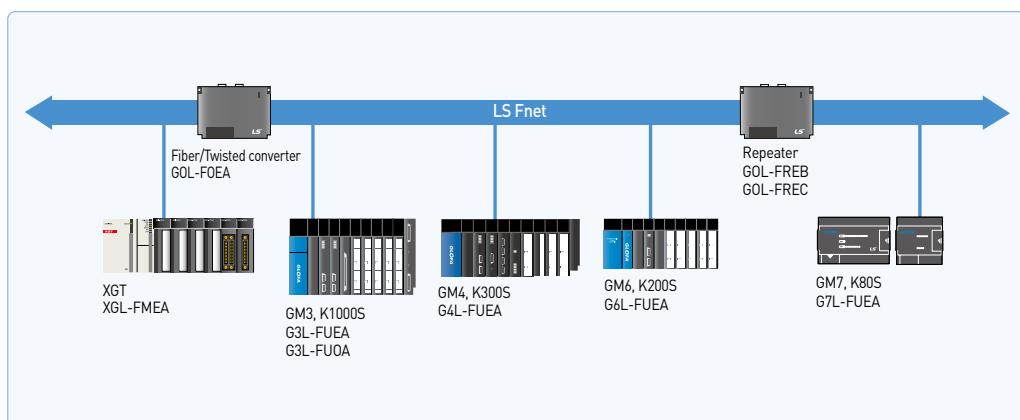System configuration

Ethernet switching hub

Programmable Logic Controller 76 / 77

XGL-EH5T


- Rack type: No external power
- Reliability for industrial standard
- Auto Crossover
- FG (Frame Ground) for RJ-45 connector
- Decreased communication error by shielded FTP/STP cable



Specification

	Item	XGL-EH5T
Transmission	Communication speed	10/100Mbps
	Port type	10/100BASE-TX, TP cable, RJ-45 socket, 5ports
	Interface	Auto-Crossing, Auto-Nego., Auto-Polarity
	Distance	100m
	Diagnosis	LED (PWR, Link status, Data)
Current consumption (mA)		550
Weight (g)		90

System configuration

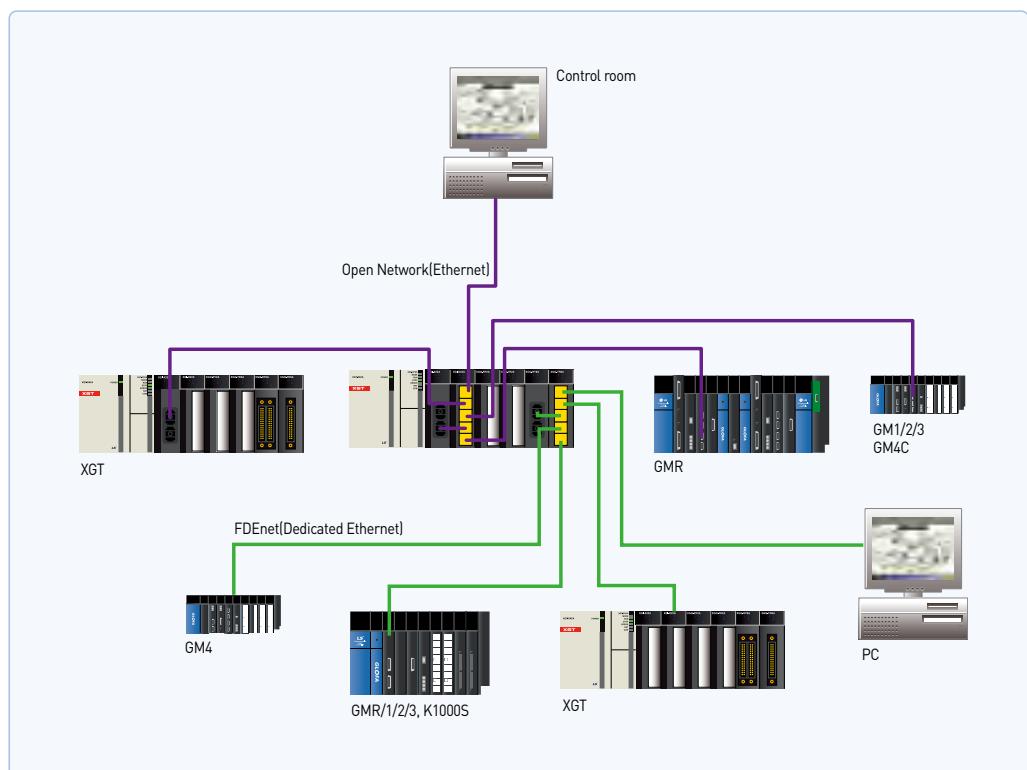


XGL-BIPT

- Compatibility: compatible with ANSI/ASHRAE 135-1995
- Provides 100BASE-TX media, and supports 100Mbps/Full Duplex.
- Up to 24 modules can be equipped per CPU module, and can be installed on main base or augmenting base. However, they can be installed only on main base in XGR system.
- With its internal switch function, it requires no switch or HUB, which reduces wires and provides flexibility in terms of installation.
- Makes cable works easier with its auto cross-over function.
- Provides various diagnosis functions and status information for modules and networks.

**System configuration**

XGL-BIPT module can be connected to BACnet Network using client/server, XGL-BIPT module is used as BACnet server, and sub-device can be controlled by being connected with exclusive power line communication (PLC).

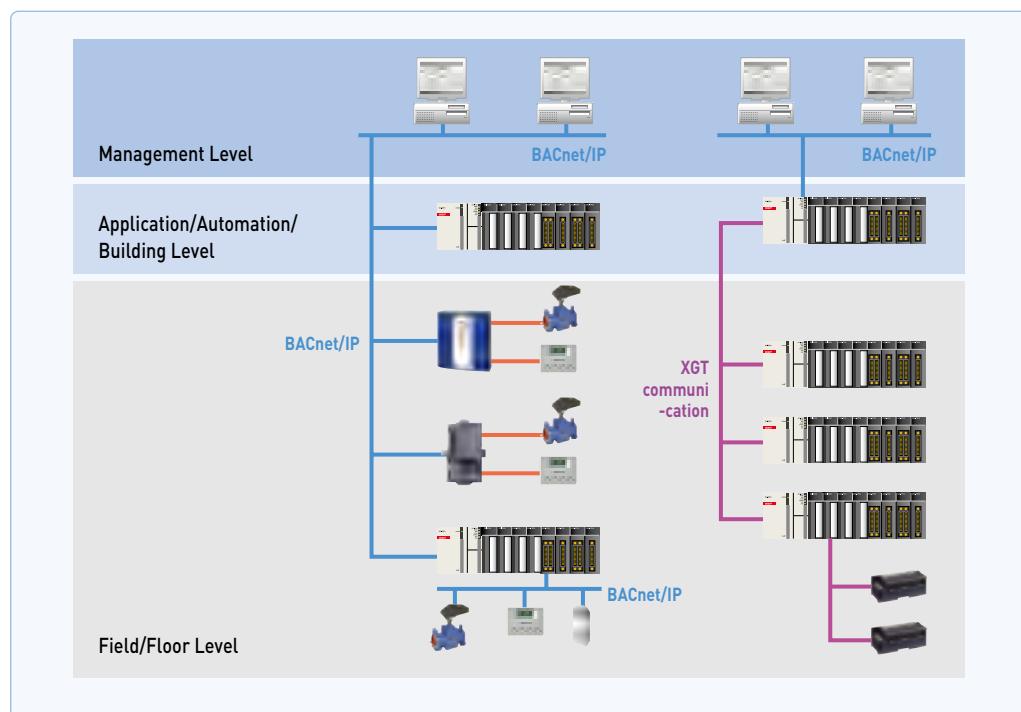

Device Profile	B-ASC + Client
Data Sharing	DS-RP-A, B DS-RPM-A, B DS-P-A, B DS-WPM-A, B
Device & Network Management	DM-DDB-B DM-DOB-B DM-DCC-A, B

Specifications

	Item	Specification
Transmission standards	Transmission speed	100Mbps
	Transmission method	Base band
	Maximum extension distance between nodes	100m
	Maximum size of protocol	1,536 bytes
	Communication access method	CSMA/CD
	Frame error check method	CRC 32 = $X^{32}+X^{26}+X^{23}+\dots+X^2+X+1$
Service	Maximum number of units installed	24 units
	Service type	P2P/Server
	Maximum communication data	1,400 bytes
	Support object(Server)	Device Object Binary Input Object Binary Output Object Analog Input Object Analog Output Object
	Diagnostic function	Communication module information Service status information Media information Ping test Auto scan DCC(Device Communication Control) System log
	External dimensions(mm)	90(H)×27(W)×90(D)
Basic standards	Current consumption(mA)	400
	Weight(g)	102

Communication among PLCs


This is a system configuration communicating between XGT PLCs by serial communication.

In this case, PLC 1 is the master (Client) and other PLC should be slaves (Server).

It is called Master/Slave communication. Master PLC is defined by comm. basic parameter and P2P setting. And slave PLC is defined by basic parameter and driver setting.

Configuration

PLC1 reads present value, C0000 of PLC 2's up-counter and then saves it in M0200 of PLC1.

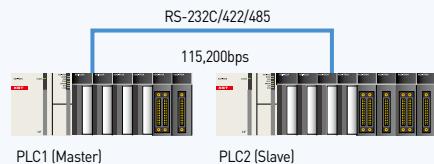

Data memory

PLC station	PLC memory	Setting Item
PLC 1	M0100	1. XG5000 parameter setting, 2. XG5000 programming
PLC 2	C0000	1. XG5000 parameter setting, 2. XG5000 programming

XG5000 setting

PLC setting 1 (Master)




Communication basic parameter setting
Setting up station number, communication speed, etc. And setting up the operation mode as P2P

P2P channel setting
Setting up channel 01 as [XGT client]

P2P setting
Setting up P2P block [READ]

PLC setting 2 (Slave)

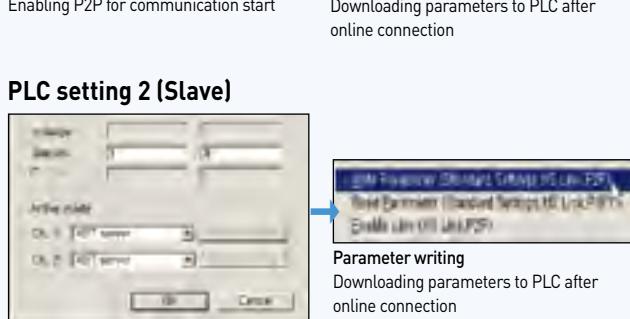

Communication parameter setting
Setting up station number and channel 01 mode as 1 and XGT server

Parameter writing
Downloading parameters to PLC after online connection


Communication data setting
Setting up Read area, Save area, etc.

* For basic parameter setting and SyCon setting/change, reset the module (Online reset).

XG5000 programming

PLC station 2 setting

Make up-counter program using CTU command

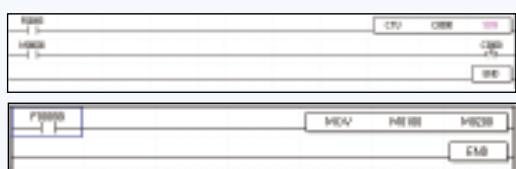

PLC station 1 setting

Check out the counter value of M0100 is transmitted.

HMI communication configuration

configuration


This is a system configuration to monitor and control PLC (XGT) by XP (HMI). In this case, PLC is the slave (Server) and XP should be the master (Client). PLC is defined by comm. basic parameter and driver setting.



Data memory

PLC memory	Setting item	PMU
M000D1	1. XG5000 parameter setting	Using touch tag
	2. XG5000 programming	


XG5000 setting

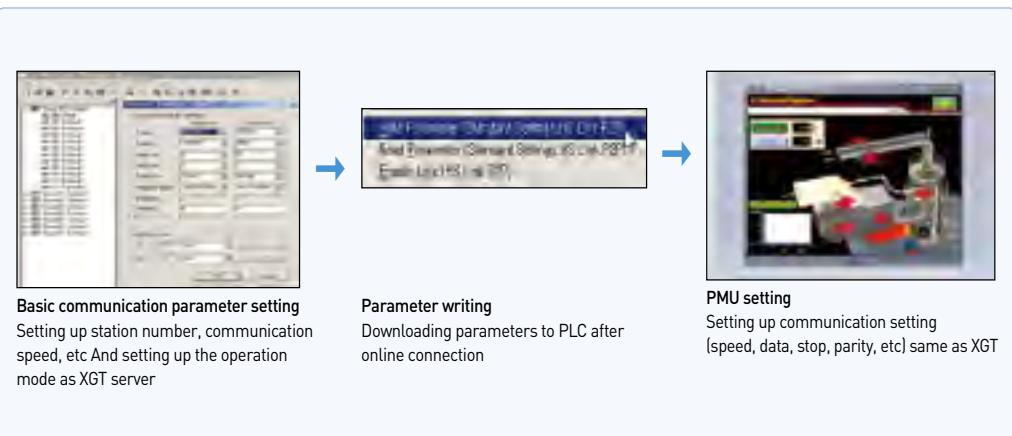

* For basic parameter setting and SyCon setting/change, reset the module (Online reset).

XG5000 programming

Create program that P00010 is on right after M00001 is on.




Communication example (Ethernet)

HMI communication configuration

configuration

Read the up-counter value C0000 of PLC1 and monitor it in GLOFAview.

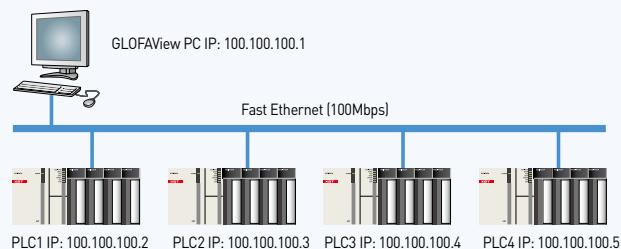


Data memory


PLC station	Setting item	GLOFAView
C0000	1. XG5000 parameter setting	Using analog tag
	2. XG5000 programming	

XG5000 setting


PLC setting 1 (Master)

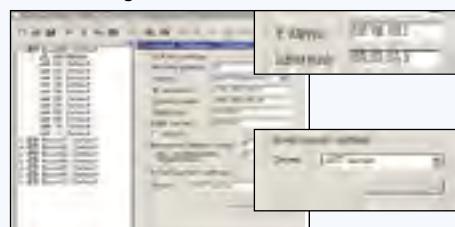


Basic communication parameter setting
Specifying IP address and Subnet mask of PLC as above

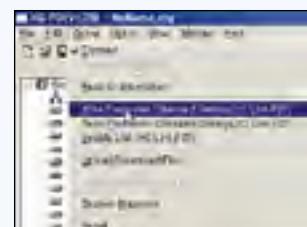


Parameter writing
Downloading parameters to PLC after online connection

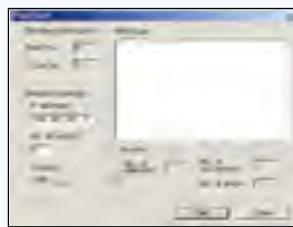

Ping Test
Starting diagnosis after inputting IP address of PLC

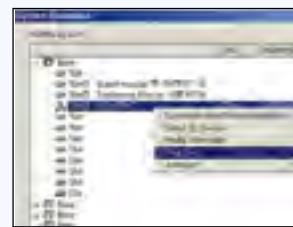

System Diagnosis
Selecting Ping Test

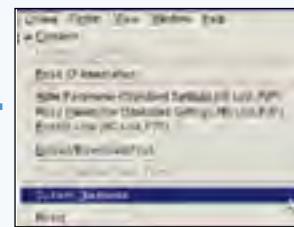


Communication test
Checking online and system diagnosis

* For basic parameter setting and SyCon setting/change, reset the module [Online reset].

XG5000 programming

Make the up-counter program using CTU command.

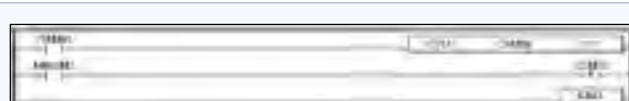


Check out if the counter value of CTU value is transmitted.



High-speed link communication configuration

This is a configuration for XGT to communicate each other via Ethernet.
It just needs communication basic parameter setting and High-speed link item setting.


configuration

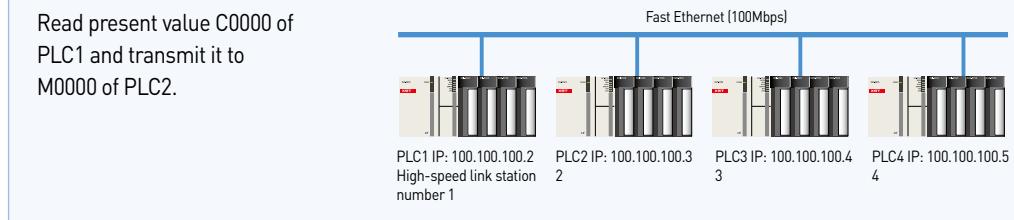

Data memory

PLC station	PLC memory	Setting Item
PLC 1	C0000	1. XG5000 parameter setting, 2. XG5000 programming
PLC 2	M0100	1. XG5000 parameter setting, 2. XG5000 programming

XG5000 setting

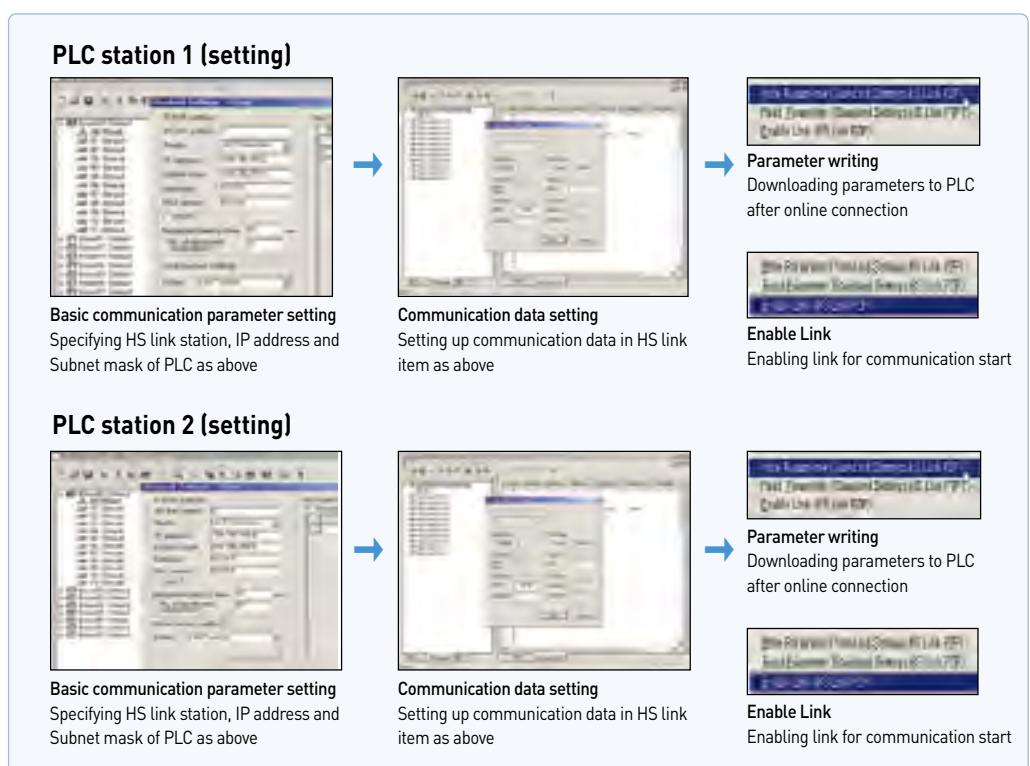


* For basic parameter setting and SyCon setting/change, reset the module [Online reset].

XG5000 programming

PLC1 setting
Make the up-counter program using CTU command



PLC2 setting
Check out if the counter value of M0100 is transmitted.




Remote I/O configuration

LS ELECTRIC developed communication method is Rnet which is a Distributed Control System using Smart I/O. In this case, PLC is the master and the other Smart I/O are slaves.

It just needs basic parameter setting for communication and High-speed link setting.

configuration

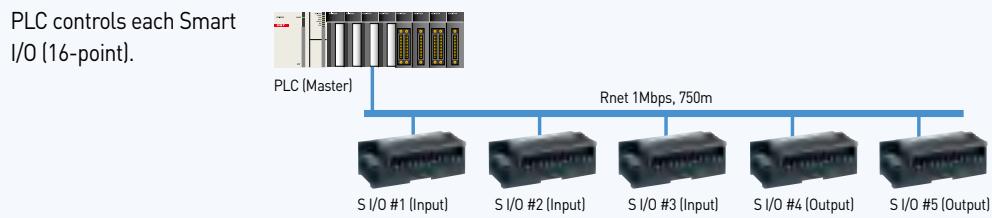


Data memory

Smart I/O #	Smart I/O address	PLC address	Setting item
1	P0000	P0010 (P00100~P0010F)	1. XG5000 parameter setting, 2. XG5000 programming
2	P0000	P0011 (P00110~P0011F)	
3	P0000	P0012 (P00120~P0012F)	
4	P0000	P0013 (P00130~P0013F)	
5	P0000	P0014 (P00140~P0014F)	

XG5000 setting

Communication data setting


Setting up type name, station number, address of each station, Smart I/O in HS link item as following example.

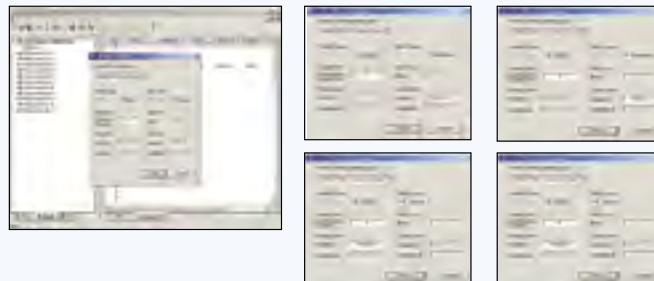

* For basic parameter setting and SyCon setting/change, reset the module (Online reset).

XG5000 programming

Write a program using I/O address of Smart I/O.

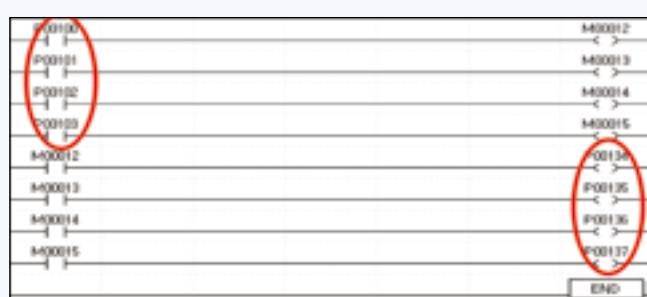


High-speed link communication among PLCs

XGT can create 'Distributed Control System' with Smart I/O, Inverter, pneumatic device via Profibus-DP.
In this case, PLC is the master and the other devices such as Smart I/O are slaves.

It just needs SyCon, basic parameter and High-speed link setting.


configuration

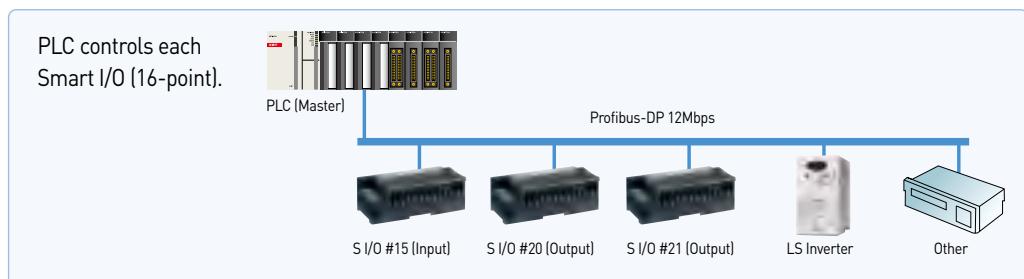

Data memory

Smart I/O #	Smart I/O address	PLC address	Setting item
15	P0000	P0010 [P00100~P0010F]	1. SyCon setting 2. XG5000 parameter setting, 3. XG5000 programming
20	P0000	P0011 [P00110~P0011F]	
21	P0000	P0012 [P00120~P0012F]	

XG5000 setting

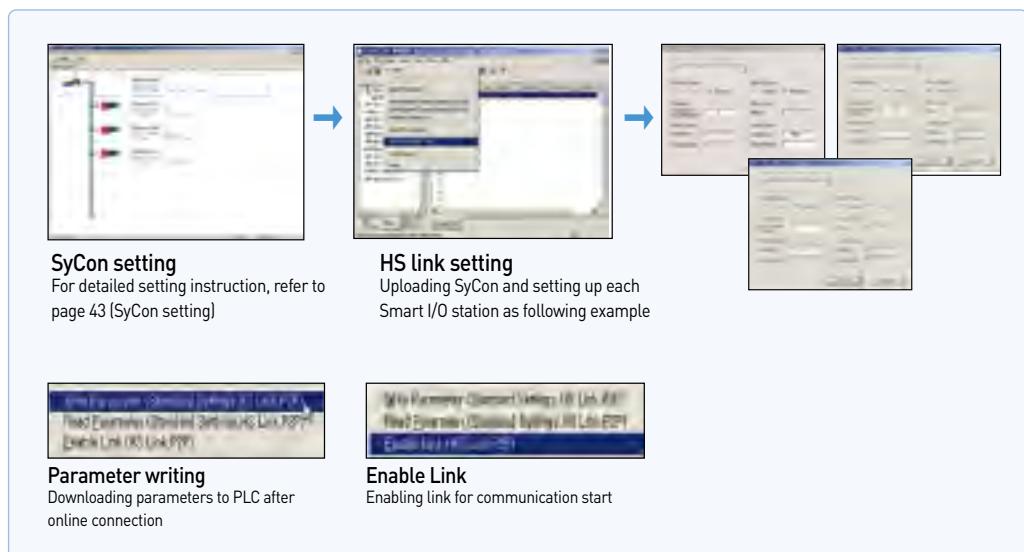

XG5000 programming

Write a program using I/O address of Smart I/O Pnet




Communication example (DeviceNet)

High-speed link communication among PLCs

XGT can create „Distributed Control System“ with Smart I/O, Inverter, pneumatic device via Dnet. In this case, PLC is the master and the other devices such as Smart I/O are Slaves.

It just needs SyCon, basic parameter and High-speed link setting.


configuration

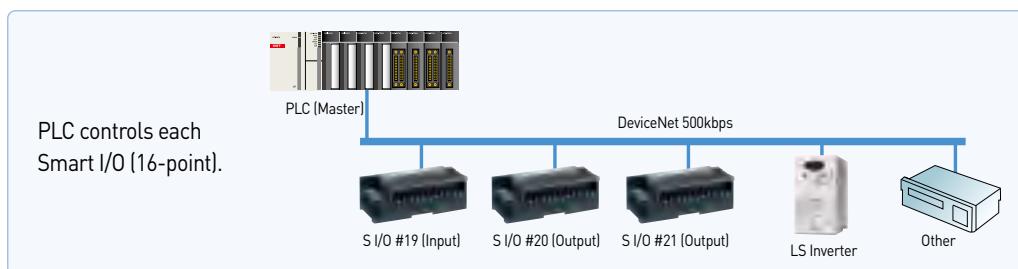

Data memory

Smart I/O #	Smart I/O address	PLC address	Setting item
19	P0000	P0010 (P00100~P0010F)	1. SyCon setting
20	P0000	P0011 (P00110~P0011F)	2. XG5000 parameter setting,
21	P0000	P0012 (P00120~P0012F)	3. XG5000 programming


XG5000 setting

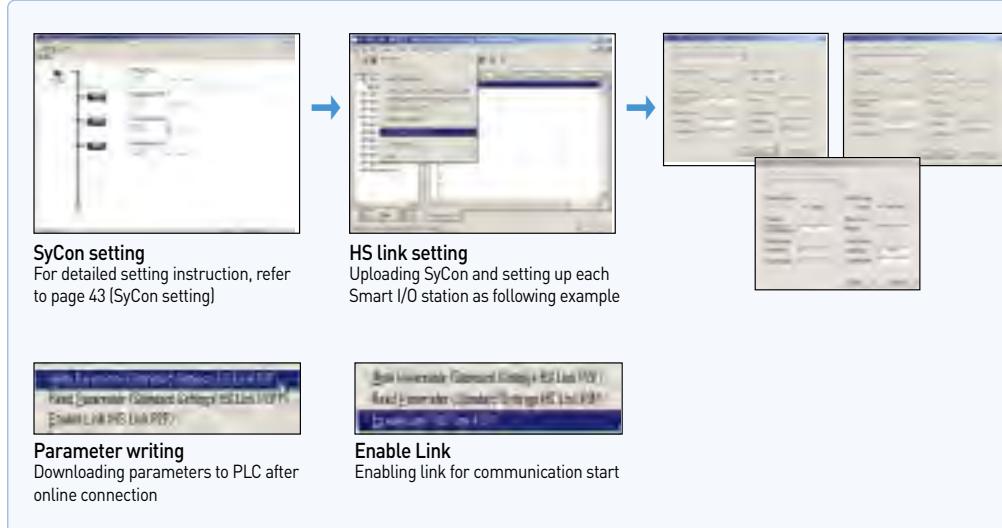

* For basic parameter setting and SyCon setting/change, reset the module (Online reset).

XG5000 programming

Write a program using I/O address of Smart I/O Dent.

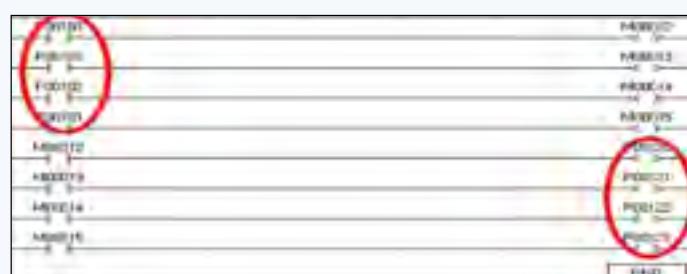

(SyCon setting Profibus, DeviceNet)

86 / 87

SyCon is the dedicated software that help user set up the communication environment for Profibus-DP and DeviceNet more easily and conveniently.

Example of application

New file
Select fieldbus that is used.

Basic communication parameter setting
Select [Master] in Insert menu.
Select [COM-C-DNM] for DeviceNet.
Select [COM-C-DPM] for Profibus-DP.

Bus parameter setting
Set up communication speed of master module.

Master module setting
After clicking the port button, check, the right check-box.

Automatic network scan of connected Smart I/O
Perform automatic network scan after station number setting and wiring with remote device such as Smart I/O.
At this time, all remote devices should be in normal connection (Power-On, etc).
After network scan is completed, press [Automatic Configuration] button and [OK] button.

Network checking
Check normal network (remote) condition.

Parameter download

Disconnect
Disconnect the port in Device Assignment.

Features

- Wiring reduction and real time control of distributed I/O
- Supporting Rnet, DeviceNet, Profibus-DP, Modbus (RS-422/485), RAPIEnet
- Various I/O (DC/TR/Relay) modules with the unit of 16/32 points

**Digital I/O specifications**

Item	Input		Output		Mixed module	
	DC (Sink/Source)		Transistor (Sink)	Relay	DC (Sink/Source)	Transistor (Sink)
No. of point	16	32	16	32	16	16
Rated input (Load voltage)	DC 24 V		DC 24 V	DC 24 V/AC 110 V/220 V	DC 24 V	DC 24 V
Input current (Load current)	7 mA		0.1 A/2 A, 0.5 A/3 A	2 A/5 A	7 mA 0.1 A/2 A, 0.5 A/3 A	
Response time	Off. On	3 ms or less	3 ms or less	3 ms or less	3 ms or less	3 ms or less
	On. Off	3 ms or less	3 ms or less	3 ms or less	3 ms or less	3 ms or less
Common	16 points/COM		16 points/COM	16 points/COM	16 points/COM	16 points/COM
Current consumption	200 mA	300 mA	280 mA	380 mA	550 mA	350 mA
Network	Rnet	GRL-D22C	GRL-D24C	GRL-TR2C1	GRL-TR4C1	GRL-RY2C
	Profibus-DP	GPL-D22C	GPL-D24C	GPL-TR2C/TR2C1	GPL-TR4C/TR4C1	GPL-RY2C
	DeviceNet	GDL-D22C	GDL-D24C	GDL-TR2C/TR2C1	GDL-TR4C/TR4C1	GDL-RY2C
	Modbus	GSL-D22C	GSL-D24C	GSL-TR2C1	GSL-TR4C1	GSL-RY2C
RAPIEnet	-	GEL-D24C	-	GEL-TR4C1	GEL-RY2C	-

Note1) C Source, Rated current: 0.5A, terminal separated type

C1 Sink, Rated current: 0.5A, terminal separated type

Analog I/O specifications

Item	GPL-AV8C/GEL-AV8C	GPL-AC8C/GEL-AC8C	Item	GPL-DV4C/GEL-DV4C	GPL-DC4C/GEL-DC4C
Input channels	8 channels				
Analog input	DC 1~5 V, 0~5 V, 0~10 V, -10~+10 V	0~20 mA, 4~20 mA, -20~20 mA	Digital input	0~4000, 0~8000, -8000~8000	0~8000
			Analog output	DC 1~5 V, 0~5 V, 0~10 V, -10~+10 V	0~20 mA, 4~20 mA
Digital output	0~4000, 0~8000, -8000~8000				
Input impedance	1 MΩ	250Ω	Load impedance	1 KΩ or more [0~5 V or 1~5 V]	
	±15 V	±30 mA		2 KΩ or more [0~10 V or -10~10 V]	500 Η or less
Max. resolution	1.25 mV	2.5μA	Resolution	1.25 mV	2.5 Η
	±15 V	±30 mA	Accuracy	±0.3% [full scale, Ta=0~55°C] ±0.4% [full scale, Ta=0~55°C]	±0.3% [full scale, Ta=23°C±5 °C] ±0.4% [full scale, Ta=0~55 °C]
Accuracy	±0.3% [full scale, Ta=0~55°C]	±0.3% [full scale, Ta=23°C±5 °C]	Conversion speed	10 ms or less/4 channel	
		±0.4% [full scale, Ta=0~55°C]		10 ms or less/8 channels + Transmission period (ms)	
Conversion speed	10 ms or less/8 channel		Response period	Analog input/output terminal with FG→Insulation	
Response period	10 ms or less/8 channels + Transmission period (ms)			Analog input/output terminal with FG→Insulation	
	Analog input/output terminal with FG→Insulation		Insulation method	Analog input/output terminal with Communication terminal→Insulation	
Insulation method	Analog input/output terminal with Communication terminal→Insulation			Analog input/output terminal with each channel→No insulation	
External power supply	DC 24 V [21.6 ~ 26.4]		External power supply	DC 24 V [20.4 ~ 28.8]	
External current consumption	DC 24 V: 220 mA		External current consumption	210 mA	240 mA
Weight (kg)	0.313	0.313	Weight (kg)	0.314	0.322

Communication specifications

Item	Rnet (LS dedicated network)	Profibus-DP	DeviceNet	MODBUS	RAPIEnet(RJ-45)
Protocol	LS ELECTRIC dedicated protocol (Fnet for Remote)	Profibus-DP (RS-485/EN50170)	DeviceNet (CAN)	MODBUS (RS-422/485)	Fast Ethernet
Transmission speed	1 Mbps	9.6 Kbps ~ 12 Mbps	125/250/500 Kbps	2.4 Kbps ~ 38.4 Kbps	100Mbps
Transmission distance	750 m/segment	100 m ~ 1.2 km	500/250/125 m (Thin cable: 100 m)	500 m	100M
Topology	Bus Token	Bus	Trunk & Drop	Bus	CRC32
Transmission	Pass & Broadcast	Token Pass & Master/Slave (Poll)	CSMA/NBA (Poll, Cyclic, COS, Bit Strobe)	Master/Slave (Poll)	CSMA/CD
No. of stations	32/segment (Input: 32, Output: 32)	32/segment, 99/network	64	32	64

(Modbus TCP/IP, Ether Net/IP Adapter) 88 / 89

Features

- IEEE 802.3 standard
- Modbus TCP/IP, EtherNet/IP
- 10/100BASE-TX media
- Ethernet Twisted pair 2ports (RJ-45)
- 2channels Ethernet MAC
- Auto-Negotiation/Auto-Crossover
- Various system configuration



Specification

Items	XEL-BSSA	XEL-BSSB	
Protocol	Modbus TCP	EtherNet/ IP	
Transmission speed	10 /100Mbps		
Connector	RJ-45(2ports)		
Topology	Software(BootpServer)		
IP setup	Bus, Star		
Max. expansion module	8ea		
Max. digital I/O point	256 points		
Max. analog I/O channel	32ch (Input 16ch, Output 16ch)		
Operating power	Rated voltage Range Rated current Insulation	DC 24V DC19.2 ~ 28.8V 1.5A Non-Insulation, Comm. Part insulation	

System configuration

Items	Description	Max. I/O point
XBE-DC08A	DC24V input 8pt	Max. 256 points
XBE-DC16A	DC24V input 16pt	
XBE-DC32A	DC24V input 32pt	
XBE-RY08A	Relay output 8pt	
XBE-RY16A	Relay output 16pt	
XBE-TN08A	Tr output 8pt, Sink	
XBE-TP08A	Tr output 8pt, Source	
XBE-TN16A	Tr output 16pt, Sink	
XBE-TP16A	Tr output 16pt, Source	
XBE-TN32A	Tr output 32pt, Sink	
XBE-TP32A	Tr output 32pt, Source	Max. 256 points
XBE-DN16A	DC24V input 8pt , Tr output 8pt	
XBF-AD04A	Current/Voltage input 4Ch	
XBF-AD04C	4-channel analog input (current/voltage, resolution : 1/16000)	
XBF-DC04A	Current output 4Ch	
XBF-DV04C	4-channel analog input (voltage, resolution : 1/16000)	
XBF-DV04A	Voltage output 4Ch	
XBF-DV04C	4-channel analog input (voltage, resolution : 1/16000)	
XBF-RD04A	RTD input 4Ch	
XBF-TC04S	TC input 4Ch	


* When Digital input and Analog input is used together or Digital output Analog output is used, configure the system within 32bytes
(Ex) If 4ch analog input is used, Digital input can be used max. 192points

Externals and inscriptions



Item	LED status
RUN	Operation status
	On: Normal operation
	Off: Abnormal operation
I/O ERROR	Interface status of expansion module
	On: Expansion module error
	Off: Normal operation
TX	Data send status to master
	On: Under transmission
	Off: No data
RX	Data receive status from master
	On: Under receiving
	Off: No data

Dimension

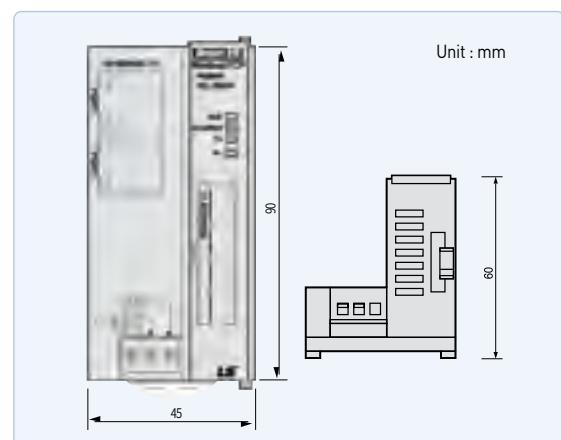

Features

- Max. 63 stations
- Flexible connection via DeviceNet
- Utilize same I/O modules with XGB
 - Max. 512 I/O points
 - Max. 32 channels analog input/output



Specification

Items		Description		
Communication Specification		Poll, Bit-strobe, COS/Cyclic		
		Group 2 only slave		
		Auto baud rate		
Module's Type		Slave		
Max. Node Number (MAC ID)		64[0~63]		
Number of Expansion I/O Slots		8		
Max. DC I/O Data Size		Input:32bytes / Output:32bytes		
Max. Analog Channels		Input : 16Channels / Output : 16Channels		
Speed & Distance	Comm. Speed	125 kbps	250 kbps	500 kbps
	Distance	500 m	250 m	100 m
Input Power		System Power DC 24V		
Input Power	Range	19.2V ~ 28.8V(11V operate)		
	Output Voltage/ Current	5V(20%) / 1.5A		
Weight(g)		100		


* When I/O module is installed, check the current consumption
(Max. Current: 1.5A)

System configuration

Items	Description	Max. I/O point
XBE-DC08A	DC24V input 8pt	Max. 256 points
XBE-DC16A	DC24V input 16pt	
XBE-DC32A	DC24V input 32pt	
XBE-RY08A	Relay output 8pt	
XBE-RY16A	Relay output 16pt	
XBE-TN08A	Tr output 8pt, Sink	
XBE-TP08A	Tr output 8pt, Source	
XBE-TN16A	Tr output 16pt, Sink	
XBE-TP16A	Tr output 16pt, Source	
XBE-TN32A	Tr output 32pt, Sink	
XBE-TP32A	Tr output 32pt, Source	
XBE-DN16A	DC24V input 8pt , Tr output 8pt	
XF-BF-AD04A	Current/Voltage input 4Ch	16channels
XF-BF-AD04C	4-channel analog input (current/voltage, resolution : 1/16000)	
XF-BF-DC04A	Current output 4Ch	
XF-BF-DV04C	4-channel analog input (voltage, resolution : 1/16000)	
XF-BF-DV04A	Voltage output 4Ch	
XF-BF-DV04C	4-channel analog input (voltage, resolution : 1/16000)	
XF-BF-RD04A	RTD input 4Ch	
XF-BF-TC04S	TC input 4Ch	


* When Digital input and Analog input is used together or Digital output Analog output is used, configure the system within 32bytes
(Ex) If 4ch analog input is used, Digital input can be used max. 192points

Externals and inscriptions

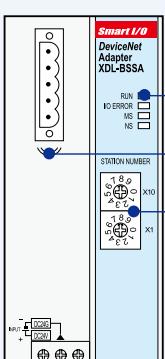

Item	LED status
RUN	ON : Normal
	OFF : Module error
I/O ERROR	ON : I/O module error
	OFF : Normal
MS	Green ON: Normal
	Green blink: Normal
NS	Red ON: Module error
	Green ON: Normal
	Green blink: Waiting
	Green off: Comm. stop
	Red ON: Network error
	Red blink: Disconnect

Dimension

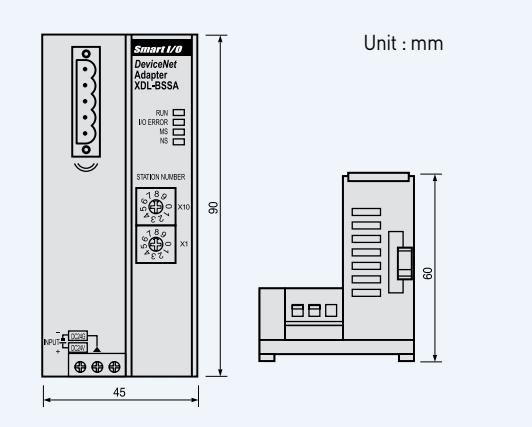

SMART I/O (Profibus-DP adapter)

90 / 91

Features

- Max. 100 stations (32stations per segment)
- Flexible connection via Profibus
- Utilize same I/O modules with XGB
 - Max. 512 I/O points
 - Max. 32 channels analog input/output




Specification

Item		Performance Specification				
Transmission	Standard	EN50170 / DIN 19245				
	Interface	RS-485(Electric)				
	Media Access	Polling				
	Topology	BUS				
	Encoding Method	NRZ				
	Interface	Sync mode , Freeze mode Auto baud rate				
	Master/Slave	Slave				
	Cable Type	Twisted Pair Shielded Cable				
	Kbps	9.6	19.2	93.75	187.5	500
	m	1200	1200	1200	1000	400
Input Power	Comm. Distance	kbps	1500	3000	6000	12000
	m	200	100	100	100	-
	Max. Node Number	100 [0 ~ 99]				
	Number of Expansion I/O Slots	8				
	I/O Data Size	64bytes (Input:32bytes/Output:32bytes)				
	Number of Analog Channels	32Channels (Input : 16Channels/Output :16Channels)				
	System Power	Supply Voltage : DC 24Vdc 19.2 ~ 28.8Vdc				
	Output Voltage/ Current	5V (20%) / 1.5A				
	Weight(g)	100				


* When I/O module is installed, check the current consumption
(Max. Current: 1.5A)

Externals and inscriptions

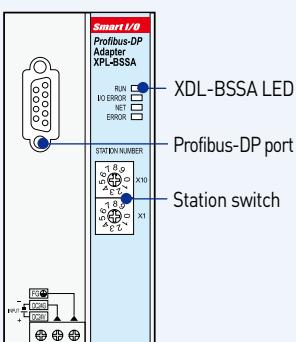

Item	LED status
RUN	ON : Normal
	Blink: Waiting or comm. error
	OFF : Module error
I/O ERROR	ON : I/O module error
	OFF : Normal
NET	ON : Data send/receive
	OFF : Disconnection
NS	ON : Comm. error
	OFF : Normal

Dimension

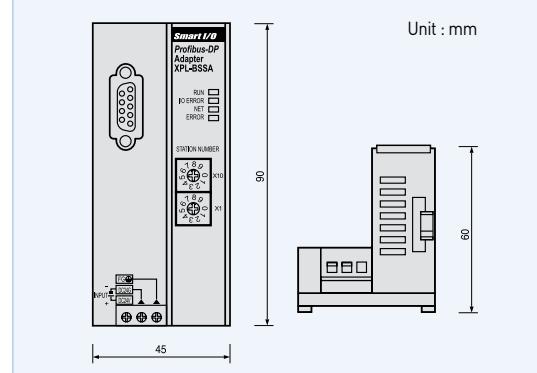

Features

- Max. 63 stations
- LS dedicated protocol (Rnet)
- Utilize same I/O modules with XGB
 - Max. 512 I/O points
 - Max. 32 channels analog input/output



Specification

Item	Performance Specification
Transmission	Tran. Rate 1Mbps
	Transmission Path Bus type
	Method 750m
	Max. Cable Length 5 pin connector
	Connector type Twisted Pair Shielded Cable
	Cable type 32(non-used repeater),
	No. of Station 64(used repeater)
	(Included Master) 512(Input : 256, Output: 256)
	Max. Digital I/O points 96
	Max. Analog I/O points Digital I/O 8
Number of I/O Slots	Analog I/O 4
Selection of Latch/Clear	handling of mode change switch
Rated Voltage/current	DC24V/0.55A
Weight (g)	100


* When I/O module is installed, check the current consumption
(Max. Current: 1.5A)

System configuration

Items	Description	Max. I/O point
Digital I/O	XBE-DC08A DC24V input 8pt	256points
	XBE-DC16A DC24V input 16pt	
	XBE-DC32A DC24V input 32pt	
	XBE-RY08A Relay output 8pt	
	XBE-RY16A Relay output 16pt	
	XBE-TN08A Tr output 8pt, Sink	
	XBE-TP08A Tr output 8pt, Source	
	XBE-TN16A Tr output 16pt, Sink	
	XBE-TP16A Tr output 16pt, Source	
	XBE-TN32A Tr output 32pt, Sink	
Analog, Temperature	XBE-TP32A Tr output 32pt, Source	16channels
	XBE-DN16A DC24V input 8pt , Tr output 8pt	
	XF-BF-AD04A Current/Voltage input 4Ch	
	XF-BF-AD04C 4-channel analog input (current/voltage, resolution : 1/16000)	
	XF-BF-DC04A Current output 4Ch	
	XF-BF-DV04C 4-channel analog input (voltage, resolution : 1/16000)	
	XF-BF-DV04A Voltage output 4Ch	
	XF-BF-DV04D 4-channel analog input (voltage, resolution : 1/16000)	
RTD	XF-BF-RD04A RTD input 4Ch	
	XF-BF-TC04S TC input 4Ch	


* When Digital input and Analog input is used together or Digital output Analog output is used, configure the system within 32bytes
(Ex) If 4ch analog input is used, Digital input can be used max. 192points.

Externals and inscriptions

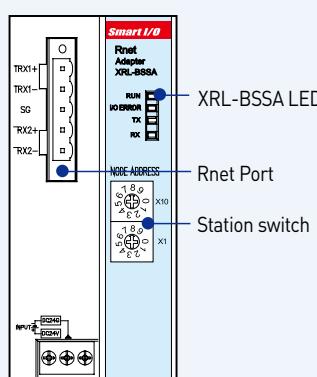

Item	LED status
RUN	ON : Normal
	OFF : Module error
I/O ERROR	ON : I/O module error
	OFF : Normal
TX	Data send
RX	Data receive


Dimension

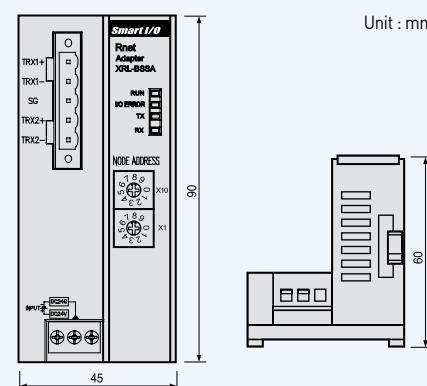


SMART I/O (Features)

Programmable Logic Controller 92 / 93


Smart I/O Rnet system

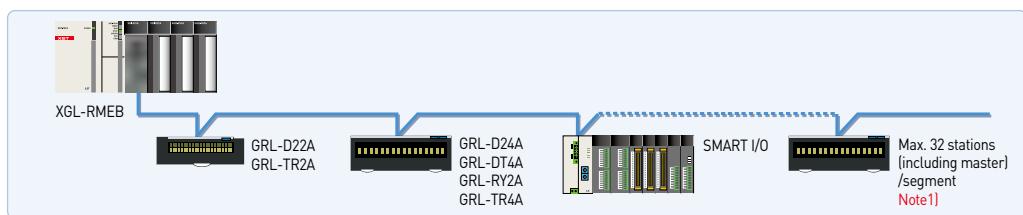


Smart I/O Modbus system

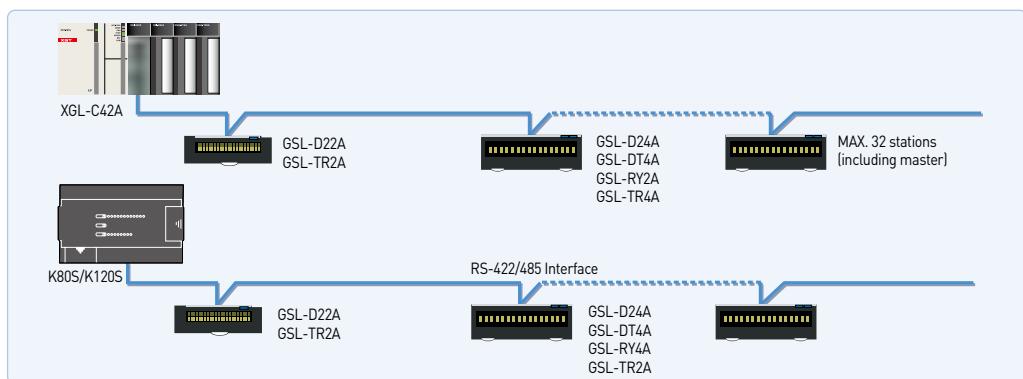

Smart I/O Profibus-DP system

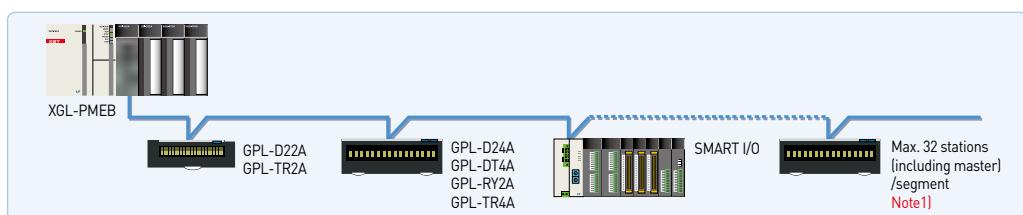


Smart I/O DeviceNet system

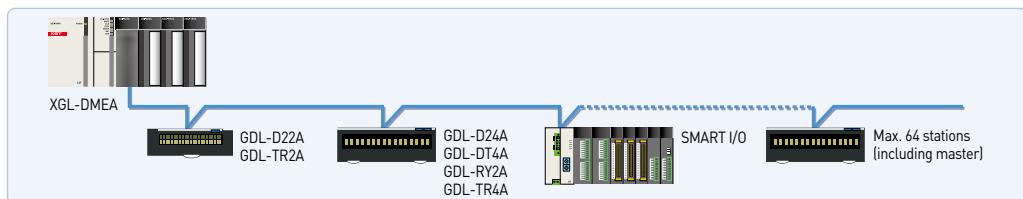

Note1] Segment: Communication section that does not use repeater or second master.

Dimensions

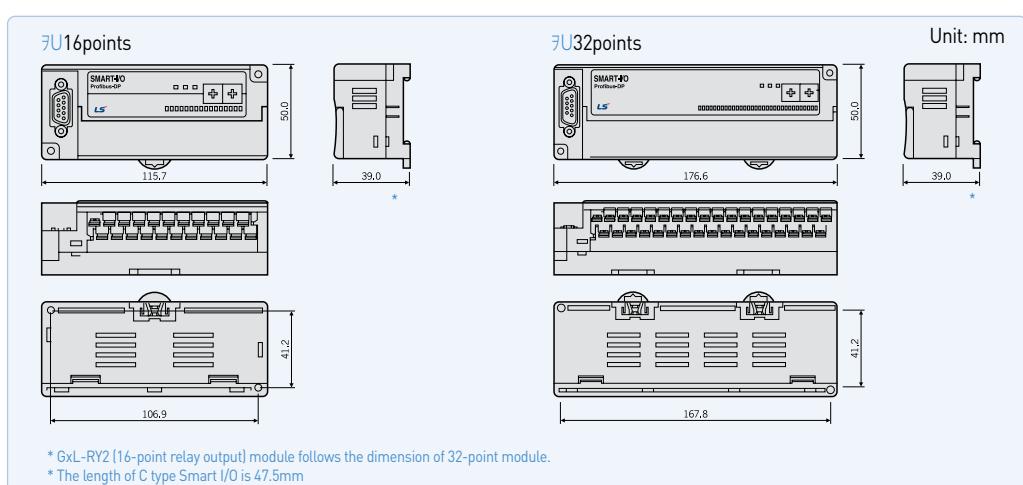

Network Standard

Item	Rnet (LS dedicated network)	Profibus-DP	DeviceNet	MODBUS	RAPInet(RJ-45)
Protocol	LS ELECTRIC dedicated protocol (Fnet for Remote)	Profibus-DP (RS-485/EN50170)	DeviceNet (CAN)	MODBUS (RS-422/485)	Fast Ethernet
Transmission speed	1 Mbps	9.6 Kbps ~ 12 Mbps	125/250/500 Kbps	2.4 Kbps ~ 38.4 Kbps	100Mbps
Transmission distance	750 m/segment	100 m ~ 1.2 km	500/250/125 m (Thin cable: 100 m)	500 m	100M
Topology	Bus Token	Bus	Trunk & Drop	Bus	CRC32
Transmission	Pass & Broadcast	Token Pass & Master/Slave (Poll)	CSMA/NBA (Poll, Cyclic, COS, Bit Strobe)	Token Pass & Master/Slave (Poll)	CSMA/CD
No. of stations	32/segment (Input: 32, Output: 32)	32/segment, 99/network	64	32	64





Special

XGT series offer diverse special modules such as analog, HSC, and positioning to satisfy complicated industrial needs

Contents

- 94 XGT speial module
- 96 Analog input module
- 98 2Wire Analog input module
- 99 Analog input module [Isolated]
- 100 Analog input module [Example]
- 101 Analog output module
- 102 Analog output module [Example]
- 103 Analog input/output module
- 104 HART interface
 - analogue/digital conversion module
- 105 High-speed counter module
- 108 8-Channel high peed counter module
- 109 High-speed counter module [Example]
- 112 Positioning module (XPM)
- 114 Positioning module (Network Type)
- 116 XG5000
- 118 Motion Module [EtherCAT]
- 119 RTD input module
- 120 Thermocouple module
- 121 Temperature controller
- 122 Event input module
- 124 Datalog module

Revolution of easy to use ... XGT Special module

Fast processing of parameter and data of special module


- Continually refreshing operation data of special module by CPU module
- Including contact points such as conversion data of AD/DA module and command of HSC & positioning module

Easy- to-use(Easy operation parameter setting and data monitoring)

- Convenient parameter setting available through XG5000
- Providing useful functions that can monitor and test operation data and contact points through XG5000

Simple maintenance (Changing online module)

- Without turning off and holding CPU, users can change special module with ease.

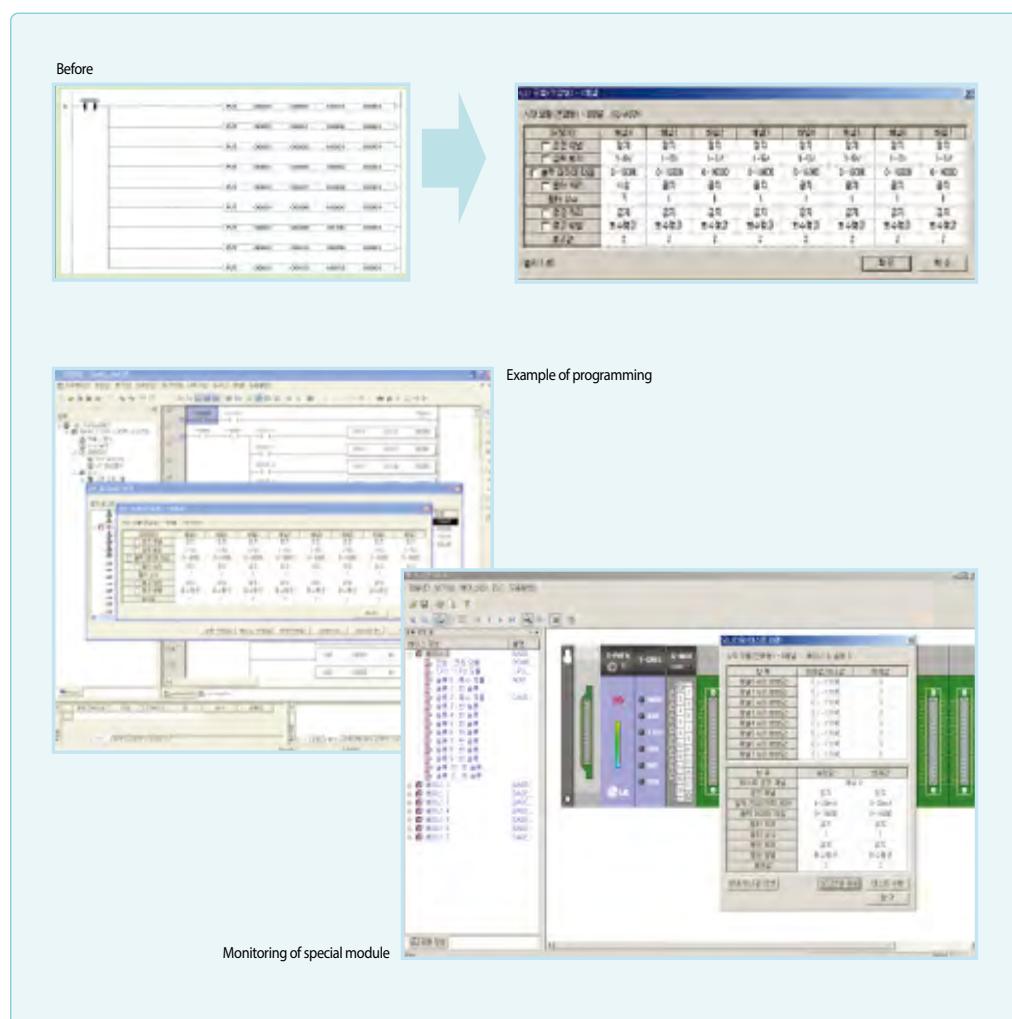

Analog input/output module



Analog input module

XGF-AV8A	8 channels, voltage
XGF-AC8A	8 channels, current
XGF-AD8A	8 channels, voltage/current
XGF-AD4S	4 channels, voltage/current
XGF-AD16A	16 channels, voltage/current
XGF-AW4S	2-wire, Voltage/ Current input, 4Ch (Isolated)



Analog output module

XGF-DV4A	4 channels, voltage
XGF-DC4A	4 channels, current
XGF-DV8A	8 channels, voltage
XGF-DC8A	8 channels, current
XGF-DV4S	4 channels, voltage, Isolated
XGF-DC4S	4 channels, current, Isolated
XGF-DA4S	4 channels, voltage/current, Isolated

Analog input/output module

XGF-AH6A	Input: 4ch, Voltage/ Current Output: 2Ch Voltage/ Current
----------	--

Temperature module



Temperature input module

XGF-TC4S	4 channels, thermocouple input, Isolated
XGF-RD4A	4 channels, RTD input
XGF-RD4S	4 channels, RTD input, Isolated



Temperature controller

XGF-RD8A	8 channels input:RTD
XGF-TC4UD	4 channels input: voltage/current/TC/RTD 8 channels output: current/TR
XGF-TC4RT	4 channels input: RTD 4 channels output: TR Control: 4loop

Positioning module/Motion controller



Positioning module

XGF-PO1A~PO3A	Open collector, 1~3axis
XGF-PD1A~PD3A	Line drive, 1~3axis
XGF-PO1H~PO4H	Open collector, 1~4axis
XGF-PD1H~PD4H	Line drive, 1~4axis

Motion module



Motion module

XGF-M32E	Standard EtherCAT Net, 32 axes
----------	--------------------------------

High speed counter module



High-speed counter module

XGF-HO2A	2 channels, Open collector
XGF-HD2A	2 channels, Line driver
XGF-H08A	8-channels high speed counter module, 8Ch

Event input module



High-speed counter module

XGF-SOE4	DC24V, 32points
----------	-----------------




Features

- Fast conversion processing
- High resolution
- Setting and monitoring the special module parameter through XG5000
- Supporting 4 types of digital output data format


Specifications

Item	XGF-AV8A (Voltage input)	XGF-AC8A (Current input)			XGF-AD4S (Voltage/Current input)												
No. of input channel	8 channels			4 channels													
Analog input	DC 1~5V, 0~5V, 0~10V, -10~10V		DC 4~20mA, 0~20mA		DC 1~5V, 0~5V, 0~10V, -10~10V												
Selection of input range in program or S/W package [Available to be set per channel]																	
Digital output	XGF-AV8A	Analog input	1~5V	0~5V	0~10V	-10~10V											
		Unsigned value			0~16,000												
		Digital output			-8000~8,000												
		Signed value															
		Precise value	1,000~5,000	0~5,000	0~10,000	-10,000~10,000											
Digital output	XGF-AC8A	Analog input			0~10,000												
		Unsigned value			0~16,000												
		Digital output			-8,000~8,000												
		Signed value															
		Precise value		4,000~20,000		0~20,000											
Digital output	XGF-AD4S	Analog input	1~5V	0~5V	0~10V	-10~10V	4~20mA										
		Unsigned value			-32,000~32,000		0~20mA										
		Digital output	1,000~5,000	0~5,000	0~10,000	-10,000~10,000	4,000~20,000										
		Signed value					0~20,000										
		Precise value			0~10,000												
Resolution	1/16,000				1/64,000												
	1~5V	0.250mV	4~20mA	1.0µA	1 ~ 5V	62.5µV	4~20mA										
	0~5V	0.3125mV			0~5V	78.1µV											
	0~10V	0.625mV	0~20mA	1.25µA	0 ~ 10V	156.3µV	0~20mA										
	-10~10V	1.250mV			±10V	312.5µV											
Accuracy	±0.2% or less (Ambient temperature 25°C) ±0.3% or less (Range of operation temperature)				±0.05% or less (Ambient temperature 25°C) Temp. coefficient ±16.7ppm/°C (Range of operation temperature)												
Conversion speed	250µs /channel																
Max. absolute input	15V	±30mA	Voltage: ±15V, Current: ±30mA														
Insulation method	Photo-coupler Insulation between input terminal and power supply																
Connection terminal	No insulation between channels																
No. of occupied	Fixed type (Setting in basic parameter): 64 points																
I/O points	Variable type (Dissolving in basic parameter): 16 points																
Current consumption	420mA			610mA													
Weight (Kg)	0.14																

Configuration

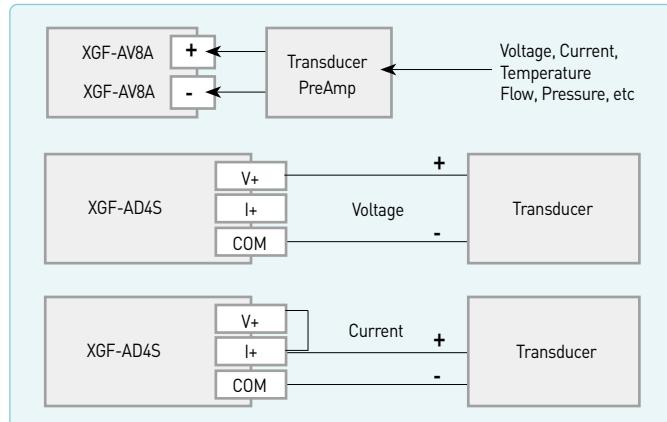

A/D conversion characteristics

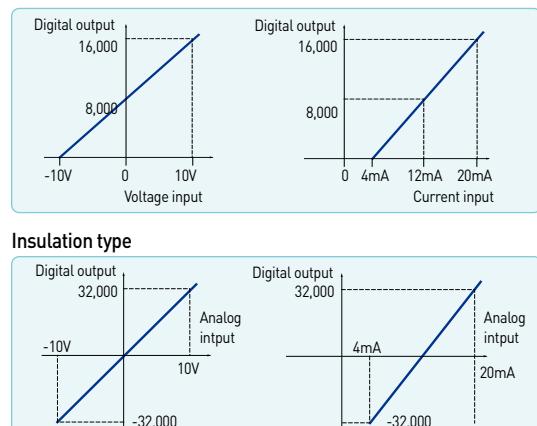

Features


- Fast conversion processing
- High resolution
- Setting and monitoring the special module parameter through XG5000
- Supporting 4 types of digital output data format




Specifications

Item	XGF-AD16A			XGF-AD8A		
No. of input channel	16 channels			8 channels		
Analogue input	Voltage input DC 1~5V, DC 0~5V, DC 0~10V, DC -10~10V (Input resistance: 1MΩ) Current input DC4~20mA, DC 0~20mA (Input resistance: 250Ω)			Dip switch		
Input selection						
Range selection	Selection of input range in the program or S / W package (Available to set per each channel)					
Input type	Voltage input DC 1~5V DC 0~5V DC 0~10V DC -10~10V Current input DC 4~20mA DC 0~20mA					
Digital output	Unsigned value 0~16,000 Signed value -8,000~8,000 Precise value 0~10,000 Percentile value 1,000~5,000 0~5,000 0~10,000 -10,000~10,000 4,000~20,000 0~20,000 Resolution[1/16000] 0.2500mV 0.3215mV 0.6250mV 1.250mV 1.00μA 1.25μA Range selection Selection of input type by program or parameter (Available to be set per each channel)					
Resolution	±0.2% or less (Ambient temperature 25°C), ±0.3% or less (Range of operation temperature)					
Max. absolute input	±15V			±30mA		
Conversion speed	500µs /channels			250µs /channels		
Insulation method	Photo-coupler insulation between terminal and power supply					
Terminal	32 points 1			8 points		
No. of occupied I/O points (XGK)	Fixed type (Setting in basic parameter); 64 points Variable type (Dissolving in basic parameter): 16 points					
Current consumption	DC 5V : 420mA					
Weight	140g					

Configuration

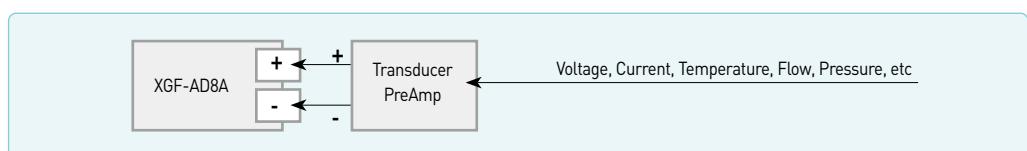

A/D conversion characteristics

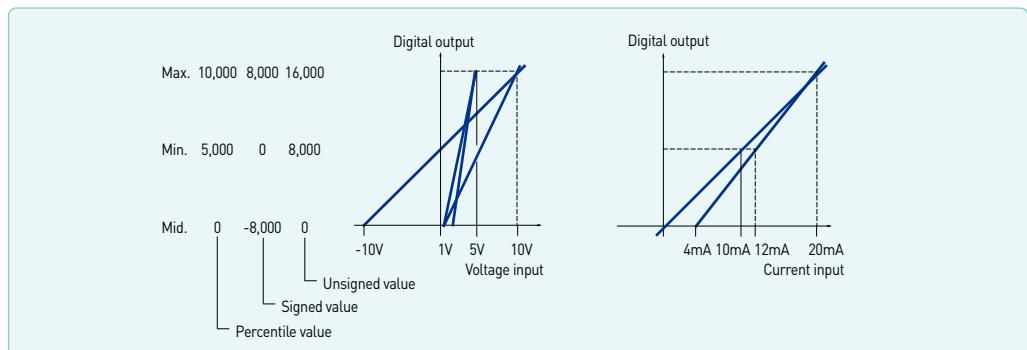

2Wire Analog input module




Features

- 2Wire sensor (transmitter) input
- 1/64000 resolution
- Channel insulation
- Various additional functions


Specifications

Item		XGF-AD4S			
No. of input channel		4channels			
Voltage input		DC 1~5V[Input resistance: 11MΩ]	DC 4~20mA[Input resistance : 250Ω]		
Digital output	Signed value	-32,000~32,000 -	32,000~32,000		
	Precise value	1,000~5,000	4,000~20,000		
	Percentile value	0~10,000	0~10,000		
	Resolution[1/64000]	0.25mV	1uA		
	Range selection	Selection of input range in program or S/W package [Available to be set per channel]			
Resolution		±0.05% or less [Ambient temperature 25°C], Temp. coefficient ±70ppm/°C(Range of operation temperature)			
Max. absolute input		±6V	±30mA		
Conversion speed		10ms/4channels			
Insulation	Item	Method	Withstand voltage	Resistance	
	Channel	Transformer	500VAC, 50/60Hz, 1min,	500VDC, 10MΩ or more	
	Terminal - Power	Photo-coupler	Leakage current: 10mA or less		
Transmitter	Voltage	DC 24V ±15%			
	Max. current	30mA			
	Short circuit protection	Limit current: 25 ~35mA			
External power		DC 24V + 20%, -15%			
Terminal		18 point terminal			
No. of occupied I/O points (XGK)		Fixed type [Setting in basic parameter]: 64 points, Variable type [Dissolving in basic parameter]: 16 points			
Current	DC 5V	180mA			
consumption	DC 24V	480mA			
Wight		140			

Configuration

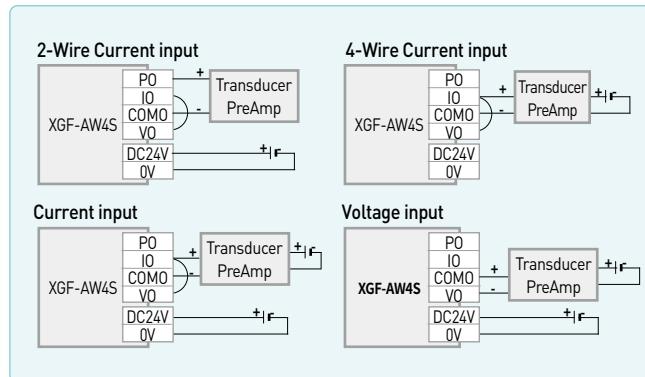

A/D conversion characteristics

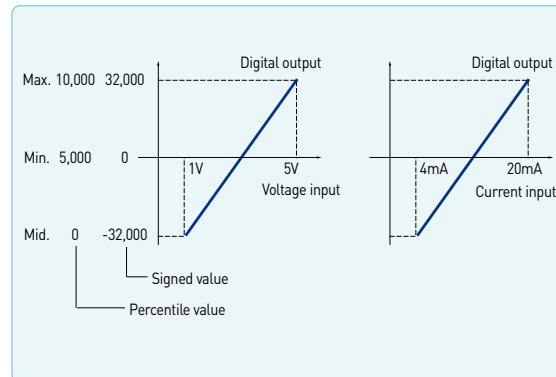

Analog input module(Isolated)

100 / 101

Features

- Channel isolation
- 1/64000 resolution
- ±0.05%(25°C) fixed density
- Setting and monitoring the special module parameter through XG5000




Specifications


Item		XGF-AD4S									
No. of input channel		4 channel									
Analog input	Voltage input	DC 1~5V, DC 0~5V, DC 0~10V, DC -10~10V (Input resistance: 1MΩ)				-					
	Current input	DC 4~20, DC 0~20 (Input resistance: 250Ω)				-					
	Input selection	Dip switch				-					
	Range selection	Selection input range in the program or S/W package(Available to set per each channel)									
	Input type	Voltage input				Current input					
Digital output	DC 1~5V	DC 0~5V	DC 0~10V	DC -10~10V	DC 4~20mA	DC 0~20mA					
	Signed value	32,000~32,000									
	Precise value	0~10,000									
	Percentile value	1,000~5,000	0~5,000	0~10,000	-10,000~10,000	4,000~20,000	0~20,000				
	Resolution(1/64,000)	0.0625mV	0.0781mV	0.1563mV	0.3125mV	0.25μA	0.3125μA				
Range selection		Selection input range in the program or S/W package(Available to set per each channel)									
Resolution		±0.2% or less(Ambient temperature 25°C), ±0.3% or less(Range of operation temperature)									
Max. absolute input		±15V				±30mA					
Conversion speed		10ms/4 channel									
Isolation Standards	Item	Isolation Method		Isolation withstand voltage		Isolation resistance					
	Channels	Transformer isolation		500VAC, 50/60Hz		10MΩ or more					
	Input-PLC Power	Photo-coupler isolation									
Terminal		18 points									
No. of occupied I/O points (XGK)		Fixed type(Setting in basic parameter):64points, Variable type(Dissolving in basic parameter): 16points									
Current consumption		DC 5V: 610mA									
Wight		140									

System Configuration

This is a simple example to start Analog input module setting. For more details, refer to user's manual.

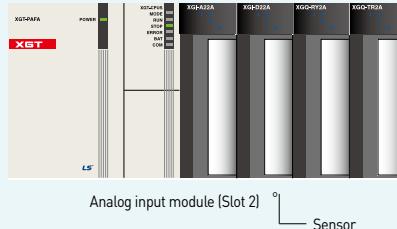


Wiring

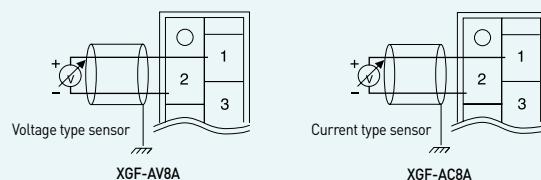

Parameter setting

In the parameter setting box, select slot and analog module that you want to use.
(This example shows to select '0' channel of voltage input type.)

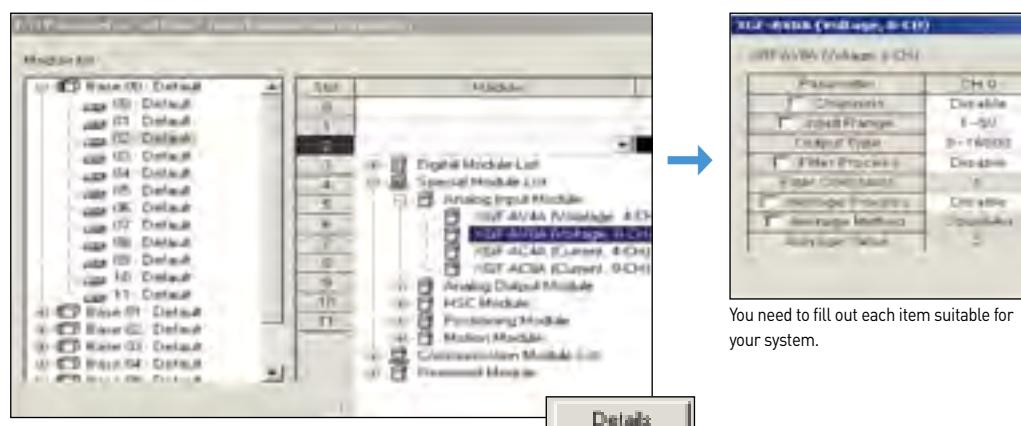

Press the <Details> button at lower end of parameter setting box after selecting the module.

Programming

Create a program for A/D conversion
(0~10V to 0~16,000).

Special devices for programming


Refer to user's manual for more details.

U02.00: Error

U02.11.0: Requesting error-clear

U02.02: Memory of channel A/D value

Uxy.aa.bb
x: Base number
y: Slot number
aa,bb: Refer to user's manual.

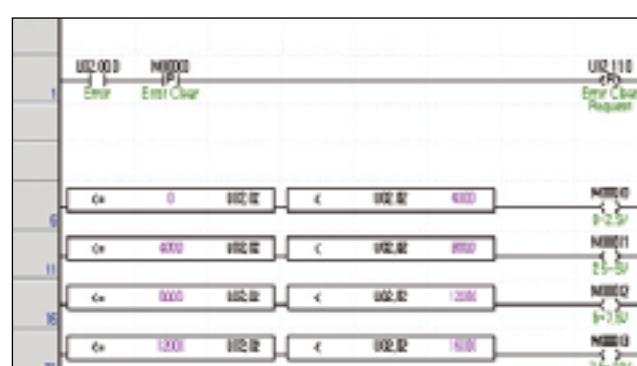

Analog output module

Programmable Logic Controller 102 / 103




Features

- Fast conversion processing
- High resolution
- Setting and monitoring the special module parameter through XG5000
- Supporting 4 types of digital input data format


Specifications

Item	XGF-DV4A, XGF-DV8A, XGF-DV4S (Voltage output type)		XGF-DC4A, XGF-DC8A, XGF-DC4S [Current output type]				XGF-DA4S (Voltage/Current output type)										
No. of input channel	XGF-DV4A/4S, XGF-DC4A/4S, XGF-DA4S : 4 channels / XGF-DV8A, XGF-DC8A : 8 channels																
	DC 1~5V, 0~5V				DC 4~20mA												
Analog output range	DC 0~10V, -10~10V				DC 0~20mA												
	Selection of input range in the program or S/W package [Available to set per each channel]																
	Digital input range	Analog output	Voltage type	1~5V	0~5V	0~10V	-10~10V										
Digital input range			Unsigned value		0~16,000												
			Signed value		-8,000~8,000												
			Precise value	1,000~5,000	0~5,000	0~10,000	-10,000~10,000										
			Percentile value		0~10,000												
Max. resolution	Analog output	Digital input	Current type	4~20mA		0~20mA											
			Unsigned value	0~16,000		0~16,000											
			Signed value	-8,000~8,000		-8,000~8,000											
			Precise value	4,000~20,000		0~20,000											
			Percentile value	0~10,000		0~10,000											
16-bit binary value: selection of input type by program or parameter [Available to be set per each channel]																	
Accuracy	1~5V		0.250mV		4~20mA		1.0µA										
	0~5V		0.3125mV														
	0~10V		0.625mV		0~20mA		1.25µA										
	±10V		1.250mV														
XGF-DV4A/8A, DC4A/8A: ±0.2% or less (Ambient temperature 25°C), ±0.3% or less (Range of operation temperature) XGF-DV4S/DC4S/DA4S: ±0.1% or less (Ambient temperature 25°C), temp coefficient: ±80ppm/°C																	
Conversion speed	250µs /channel																
Max. absolute output	±15V		±24mA														
Insulation method	Photo-coupler insulation between terminal and power supply XGF-DV4A/8A, XGF-DC4A/8A: No insulation between channels XGF-DV4S, XGF-DC4S, XGF-DA4S (Insulation type): Insulation between channels																
Connection terminal	18 point terminal																
No. of occupied points	Fixed type (Setting in basic parameter): assign 64 points Variable type (Dissolving in basic parameter): assign 16 points																
Current consumption (mA)	DV4A	DV8A	DV4S	DC4A	DC8A	DC4S	DA4S										
	Internal	190	190	200	190	190	100										
Weight (Kg)	External																
	140																
	180																
	150																
	210																
	300																
	220																
	150																


Output wiring

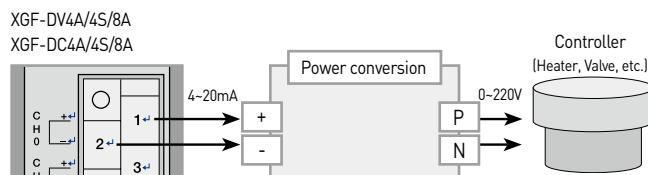

I/O conversion characteristics

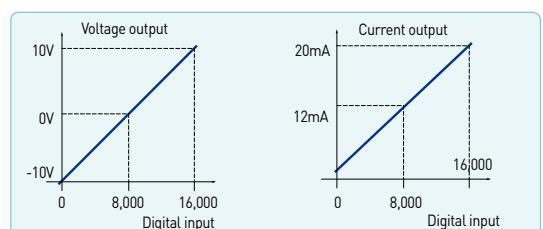


Insulation type

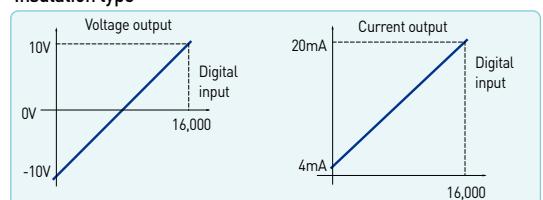


System Configuration

This is a simple example to start Analog output module setting. For more details, refer to user's manual.

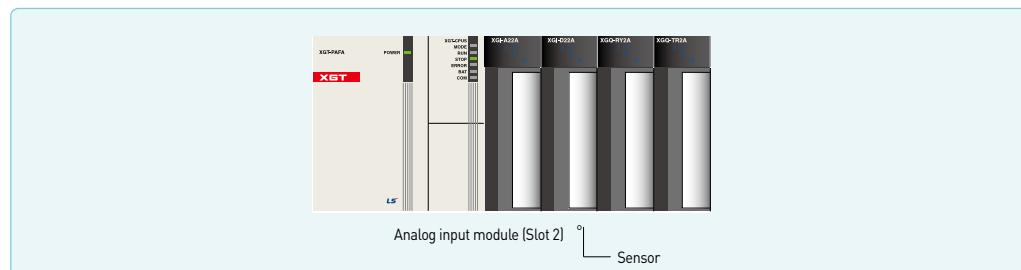


Wiring

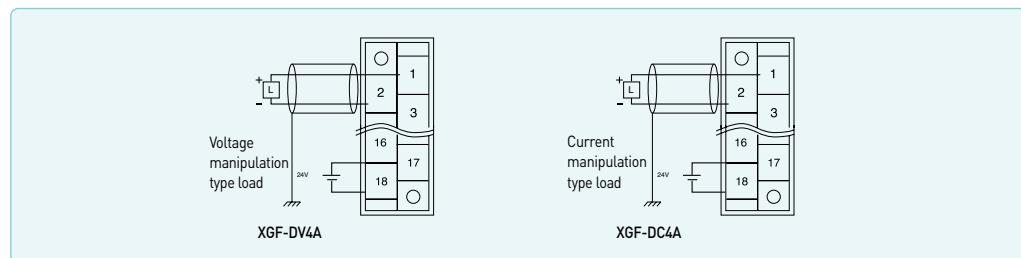

Parameter setting

In the parameter setting box, select slot and analog module that you want to use.
(This example shows to select '0' channel of voltage output type.)

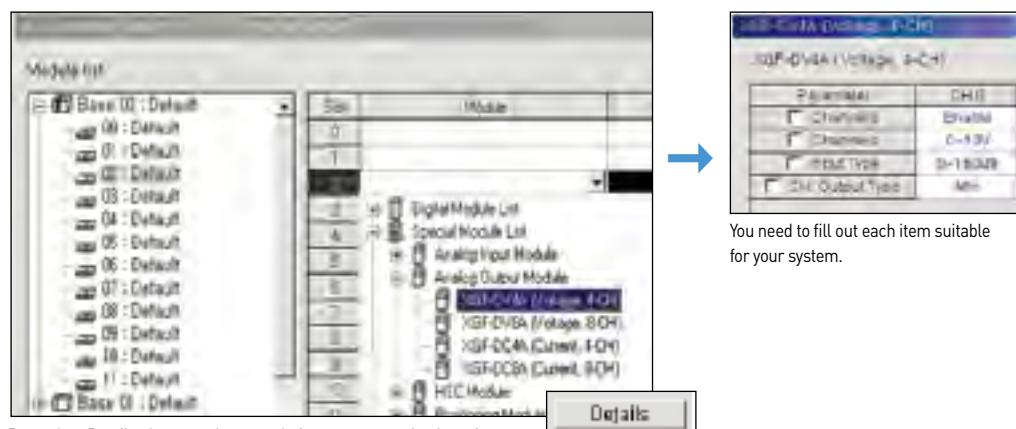

Press the <Details> button at lower end of parameter setting box after selecting the module.


Programming

Create a program for D/A conversion
(0~16000 to 0~10V).

Special devices for programming

Refer to user's manual for more details.
U02.02.0: Admitting Channel 0 output
U02.03: Output data of channel 0

Uxy.aa.bb
x: Base number
y: Slot number
aa,bb: Refer to user's manual.

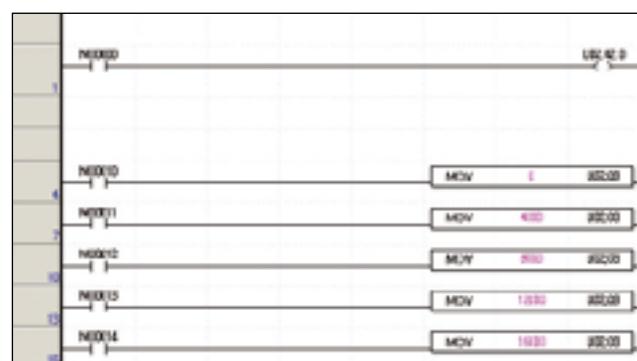

Analog input/output module

104 / 105

Features


- Input 4channels Output 2channels
- 4channels, 1/8000 resolution
- Parameter setting and monitoring by XG5000



Specifications

Item		XGF-AH6A				
Input	No. of input channel	4channels				
	Range	DC1~5V	DC0~5V	DC0~10V	DC-10~10V	DC4~20mA
	Analog output			1MΩ		250Ω
	Resistance					
	Selection	V+ and COM				
	Digital output					
Output	Unsigned value	0~8,000				
	Signed value	-4,000~4,000				
	Precise value	0~10,000				
	Percentile value	1,000~5,000	0~5,000	0~10,000	-10,000~10,000	4,000~20,000
	Resolution(1/8000)	0.5mV	0.625mV	1.25mV	2.5mV	2.0uA
	Range selection	Selection of input range in program or S/W package [Available to be set per channel]				
Resolution		±0.2% or less (Ambient temperature 25°C), ±0.3% or less (Range of operation temperature)				
Max. absolute input		±15V				
Conversion speed		500ms/channels				
No. of input channel		2channels				
Output	Range	DC1~5V	DC0~5V	DC0~10V	DC-10~10V	DC4~20mA
	Analog output			1kΩ or more		600Ω or less
	Resistance					
	Selection	V+ and COM				
	Digital output					
	Unsigned value	0~8,000				
Signed value		-4,000~4,000				
Precise value		0~10,000				
Percentile value		1,000~5,000	0~5,000	0~10,000	-10,000~10,000	4,000~20,000
Resolution(1/8000)		0.5mV	0.625mV	1.25mV	2.5mV	2.0uA
Range selection		Selection of input range in program or S/W package [Available to be set per channel]				
Resolution		±0.2% or less (Ambient temperature 25°C), ±0.3% or less (Range of operation temperature)				
Max. absolute input		±15V				
Conversion speed		500us/channels				
Insulation method		Photo-coupler insulation between terminal and power supply				
Terminal		18 point terminal				
No. of occupied I/O points (XGK)		Fixed type (Setting in basic parameter): 64 points, Variable type (Dissolving in basic parameter): 16 points				
Current consumption (DC5V)		770mA				
Wight		140				

Wiring

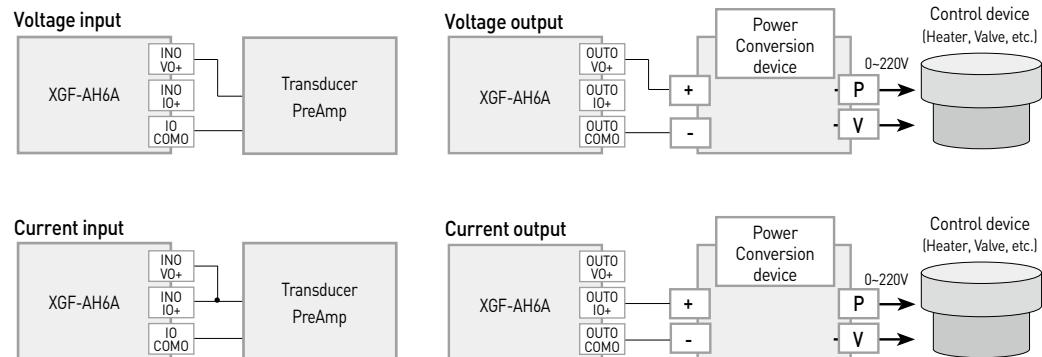

Features

- It supports HART protocol
In the input range of 4 ~ 20mA, bi-directional digital communication is available by using analog signal wiring. If analog wiring is currently used, there is no need to add wiring for HART communication (HART communication is not supported in the range of 0 ~ 20mA)
- High accuracy
- Operation parameters setting/monitoring
- Input disconnection detection function

**Specifications**

Item		XGF-AC4H		XGF-DC4H			
No. of Channels		4channels			4channels		
Analog input/output range		DC4~20mA,DC 0~20mA, (Input Resistance 250Ω)			DC 4~20mA,DC 0~20mA, (Load resistance 600Ω or less)		
Digital input/ output	Analog output/Digital input	DC4~20mA	DC0~20mA	DC4~20mA	DC0~20mA		
	Signed value	-32000~32000		-8000~8000			
	Unsigned value	-		0~1600			
	Precise value	4000~2000	0~2000	4000~2000	0~2000		
	Percentile value	0~10000					
Max. resolution		0 / 64000					
		4~20mA:250.0nA , 0~20mA:312.5nA		4~20mA:1.00nA , 0~20mA:1.25nA			
Accuracy		±0.10% or less (when ambient temperature is 25°C±5°C)			±0.10% or less (when ambient temperature is 25°C±5°C)		
		±0.25% or less (when ambient temperature is 0°C~55°C)			±0.3% or less (when ambient temperature is 0°C~55°C)		
Conversion speed		10ms/4channels					
Absolute Max. input/output		±3mA		DC 24mA			
Analog input points		4 channels / 1module					
Isolation specification		Photo-coupler isolation between input terminal and PLC power (no isolation between channels)					
Terminal connected		18-point terminal					
I/O points occupied		Fixed type: 64 points, Non fixed type : 16 points					
HART communication method		Mono drop only Primary master only					
Internal-consumed current		DC5V:340mA		DC5V:200mA, DC24V:220mA			
Weight (g)		145		150			

High-speed counter module

106 / 107

Features

- Parameter setting and monitoring using XG5000
- Incremental encoder available
- Supporting various pulse input (5V, 12V, 24V)
- Various multiplication (1/2 phase pulse input)
- External present input
- Providing function to prevent from counting external signal
- Supporting HTL-level incremental encoder in the line-drive input type



Specifications



Item		XGF-H02A			XGF-HD2A		
No. of command	Signal	A Phase, B Phase					
	Input type	Voltage input (Open Collector)			Differential input (Line Driver)		
	Signal level	DC 5/12/24V			RS-422 Line Drive/HTL LEVEL Line Drive		
	Input voltage	24V DC [17.0V ~ 26.4V]	12V DC [9.8V ~ 13.2V]	5V DC [4.5V ~ 5.5V]	Line Driver		
	Input current	7~11mA	7~11mA	7~11mA			
	Min. On guaranteed voltage	17.0V	9.8V	4.5V	RS-422 Line Drive		
	Max. Off guaranteed voltage	4.5V	3.0V	1.7V	HTL Level Line Drive		
Counter enable		Set by program [Count only in Enable]					
Max. counting speed		200Kpps		500Kpps (HTL input: 250Kpps)			
No. of channels		2 channels					
Counting range		Signed 32 Bit [-2,147,483,647 ~ 2,147,483,647]					
Counting type [Program setting]		Linear count (Generating Carry/Borrow when exceeding counting range, Max/Min value)					
Input mode [Program setting]		1 Phase input 2 Phase input CW/CCW input					
Signal type		Voltage					
Up/Down counter setting	1-phase input	Program or B-phase					
	2-phase input	Phase difference					
	CW/CCW	A-phase input: Up count B-phase input: Down count					
Multiplication	1-phase input	1/2 multiplication (Programming)					
	2-phase input	1/2/4 multiplication (Programming)					
	CW/CCW	1 multiplication					
Control input	Signal	Preset signal, Signal to admit additional signal (Setting by terminal block or programming)					
	Signal level	DC 5V/12V/24V input type (Selecting terminal)					
	Signal type	Voltage					
External output	No. of output point	2 points/channel: Terminal output available					
	Type	Single comparison ($\rightarrow, \rightarrow=, =\leftarrow, \leftarrow$) or section comparison					
	Output type	Open Collector (Sink)					
Operating status display	Input signal	A-phase, B-phase, Preset signal, Signal to admit additional signal					
	Output signal	OUT1, OUT2					
	Operation status	Module Ready, Pulse input status of A, B phase					
Addition functions [Program setting]		<ul style="list-style-type: none"> • Count clear, Count latch • Section count (Set time value: 1~60000ms) • Measuring counting number per a unit time (Set time value: 1~60000ms) • Preventing from counting (Setting by internal/external input during counting) 					
No. of occupied		Fixed type (Setting in basic parameter): 64 points					
I/O points		Variable type (Dissolving in basic parameter): 16 points					
Terminal block		40-pin connector					
Current consumption		270		330			
Weight (Kg)		0.09					

Terminal block configuration

XGF-H02A



Pin layout	Pin number		Signal name
	CH0	CH1	
A12V A24V	1	17	A12V A phase DC12V input
ACOM A5V	2	18	A24V A phase DC24V input
B12V B24V	3	19	A_C A phase COM
BCOM B5V	4	20	A5V A phase DC5V input
P12V P24V	5	21	B12V B phase DC12V input
PCOM P5V	6	22	B24V B phase DC24V input
G12V G24V	7	23	B_C B phase COM
GCOM G5V	8	24	B5V B phase DC5V input
A12V A24V	9	25	P12V Preset DC12V input
ACOM A5V	10	26	P24V Preset DC24V input
B12V B24V	11	27	P_C Preset COM
BCOM B5V	12	28	P5V Preset DC5V input
P12V P24V	13	29	G12V Gate DC12V input
PCOM P5V	14	30	G24V Gate DC24V input
G12V G24V	15	31	G_C Gate COM
GCOM G5V	16	32	G5V Gate DC5V input
CH0 OUT1 OUT0	33	35	OUT1 Comparison output OUT1
CH1 OUT1 OUT0	34	36	OUT0 Comparison output OUT0
24V 24V	37	38	24V External power supply
24G 24G	39	40	24G DC24V

Configuration

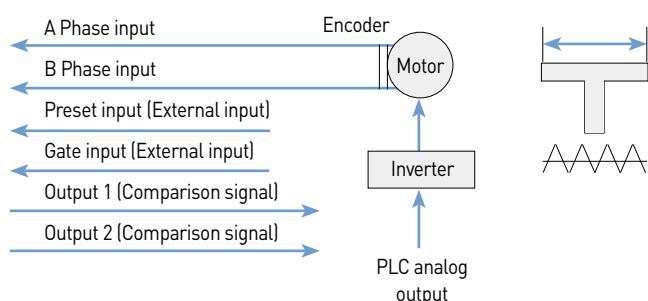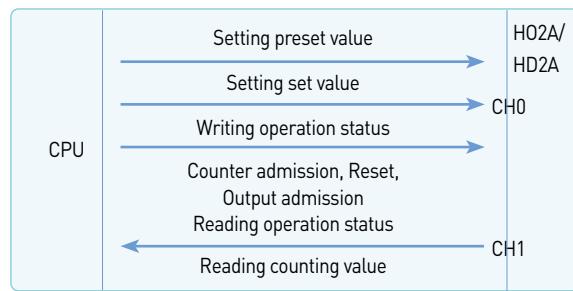

XGF-HD2A

Pin layout	Pin number		Signal name
	CH0	CH1	
AI- AI+	1	17	AI- AI-Input (LINEDRIVETTL LEVEL Input)
AI- AI+	2	18	AI+ AI+Input (LINEDRIVETTL LEVEL Input)
BI- BI+	3	19	AI- Input (LINE DRIVEHTL LEVEL Input)
BI- BI+	4	20	AI+ Input (LINE DRIVEHTL LEVEL Input)
P12V P24V	5	21	BI- BI- Input (LINEDRIVETTL LEVEL Input)
PCOM P5V	6	22	BI+ BI+ Input (LINE DRIVETTL LEVEL Input)
G12V G24V	7	23	BI- BI- Input (LINE DRIVEHTL LEVEL Input)
GCOM G5V	8	24	BI+ BI+ Input (LINE DRIVEHTL LEVEL Input)
AI- AI+	9	25	P12V Preset DC12V input
AI- AI+	10	26	P24V Preset DC24V input
BI- BI+	11	27	P_C Preset COM
BI- BI+	12	28	P5V Preset DC5V input
P12V P24V	13	29	G12V Gate DC12V input
PCOM P5V	14	30	G24V Gate DC24V input
G12V G24V	15	31	G_C Gate COM
GCOM G5V	16	32	G5V Gate DC5V input
CH0 OUT1 OUT0	33	35	OUT1 Comparison output OUT1
CH1 OUT1 OUT0	34	36	OUT0 Comparison output OUT0
24V 24V	37	38	24V External power supply
24G 24G	39	40	24G DC24V
- +			

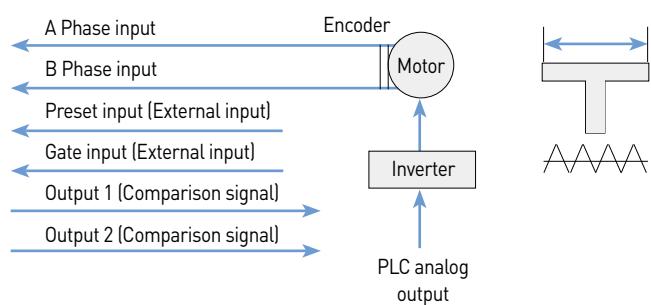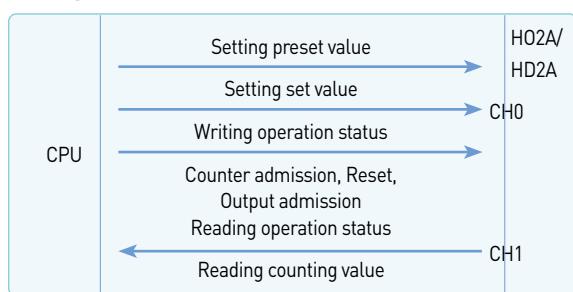Configuration

Features

- Multiple high-speed counter input support(8ch, 80-pin connector)
- Only improve performance and safety caused by the use of FPGA enhanced
- Program controlled by the preset function
- Per 1 channel output 1 point(Program setting)
- Input filter can be set (100kpps, 10kpps, 1kpps, 0.1kpps)
- The output signal through the operation status display



Specifications


Item	XGF-H08A						
No. of Channels	8 channels						
Phase	1-phase input, 2-phase input						
Signal level	5V DC (7 to 11mA), 24V DC (7 to 11mA)						
Input type	1/2/4 multiplication, CW/CCW						
Max. counting speed	200 kpps						
Input filter	None, 100kpps, 10kpps, 1kpps, 0.1kpps						
Counting range	Signed 32bit [-2147483648 ~ 2147483647]						
Counting type	Linear counter, Ring counter						
Up/Down Counter setting	<table border="0"> <tr> <td>1-phase input</td><td>B-phase : Up/Down count</td></tr> <tr> <td>2-phase input</td><td>Phase difference</td></tr> <tr> <td>CW/CCW</td><td>A-phase : Up count, B-phase : Down count</td></tr> </table>	1-phase input	B-phase : Up/Down count	2-phase input	Phase difference	CW/CCW	A-phase : Up count, B-phase : Down count
1-phase input	B-phase : Up/Down count						
2-phase input	Phase difference						
CW/CCW	A-phase : Up count, B-phase : Down count						
Multiplication	<table border="0"> <tr> <td>1-phase input</td><td>1/2 multiplication(Programming)</td></tr> <tr> <td>2-phase input</td><td>1/2/4 multiplication(Programming)</td></tr> <tr> <td>CW/CCW</td><td>1 multiplication</td></tr> </table>	1-phase input	1/2 multiplication(Programming)	2-phase input	1/2/4 multiplication(Programming)	CW/CCW	1 multiplication
1-phase input	1/2 multiplication(Programming)						
2-phase input	1/2/4 multiplication(Programming)						
CW/CCW	1 multiplication						
External output	<table border="0"> <tr> <td>Comparison detection</td><td>Single comparison(\rightarrow, $\rightarrow=$, $=\leftarrow$, \leftarrow) or Section comparison</td></tr> <tr> <td>Output points</td><td>1 point/channels : Internal or External output (programming)</td></tr> <tr> <td>type</td><td>Open collector output(Sink)</td></tr> </table>	Comparison detection	Single comparison(\rightarrow , $\rightarrow=$, $=\leftarrow$, \leftarrow) or Section comparison	Output points	1 point/channels : Internal or External output (programming)	type	Open collector output(Sink)
Comparison detection	Single comparison(\rightarrow , $\rightarrow=$, $=\leftarrow$, \leftarrow) or Section comparison						
Output points	1 point/channels : Internal or External output (programming)						
type	Open collector output(Sink)						
Operating status display	<table border="0"> <tr> <td>Input signal</td><td>A-phase, B-phase</td></tr> <tr> <td>Output signal</td><td>OUT</td></tr> <tr> <td>Operating condition</td><td>Module ready</td></tr> </table>	Input signal	A-phase, B-phase	Output signal	OUT	Operating condition	Module ready
Input signal	A-phase, B-phase						
Output signal	OUT						
Operating condition	Module ready						
Addition functions(Program setting)							
<table border="0"> <tr> <td>Power</td><td>DC5V (600mA)</td></tr> <tr> <td>Terminal block</td><td>80-pin connector</td></tr> </table>		Power	DC5V (600mA)	Terminal block	80-pin connector		
Power	DC5V (600mA)						
Terminal block	80-pin connector						

High-speed counter module (Example)


110 / 111

System Configuration

This is a simple example of high-speed counter module setting.
For more details, refer to user's manual.

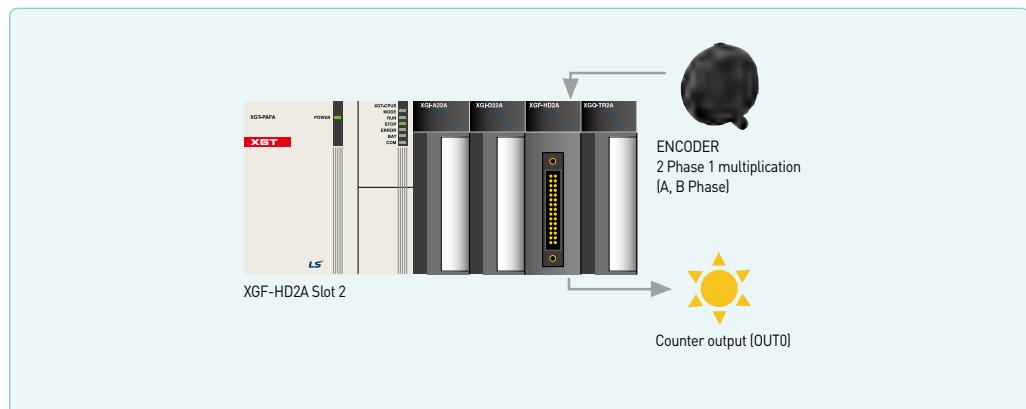

Wiring

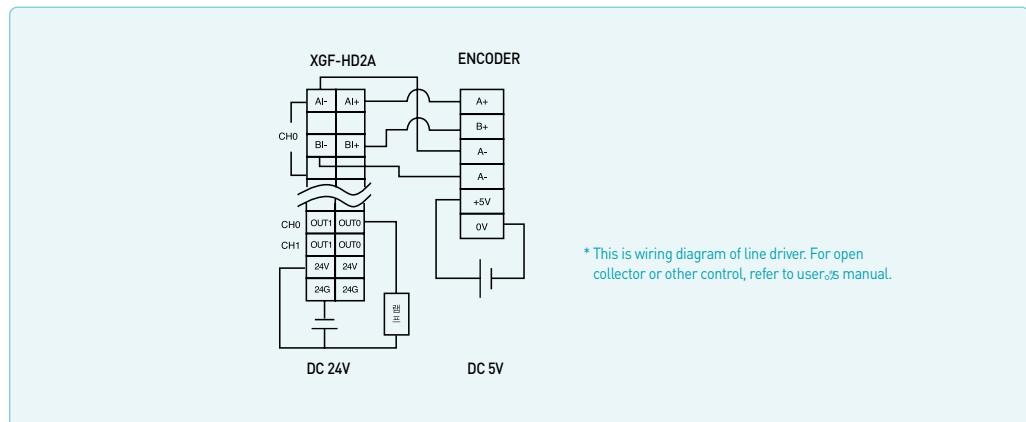


SPECIAL

Control configuration

- Light a lamp of output when present value reaches 1000 of pulse input counted by encoder.
- Current value of pulse is saved in D100~D101 and is monitored.

Module test (Online)

- Module test function of XGT enables to monitor operation status of high-speed counter module and to test-run.

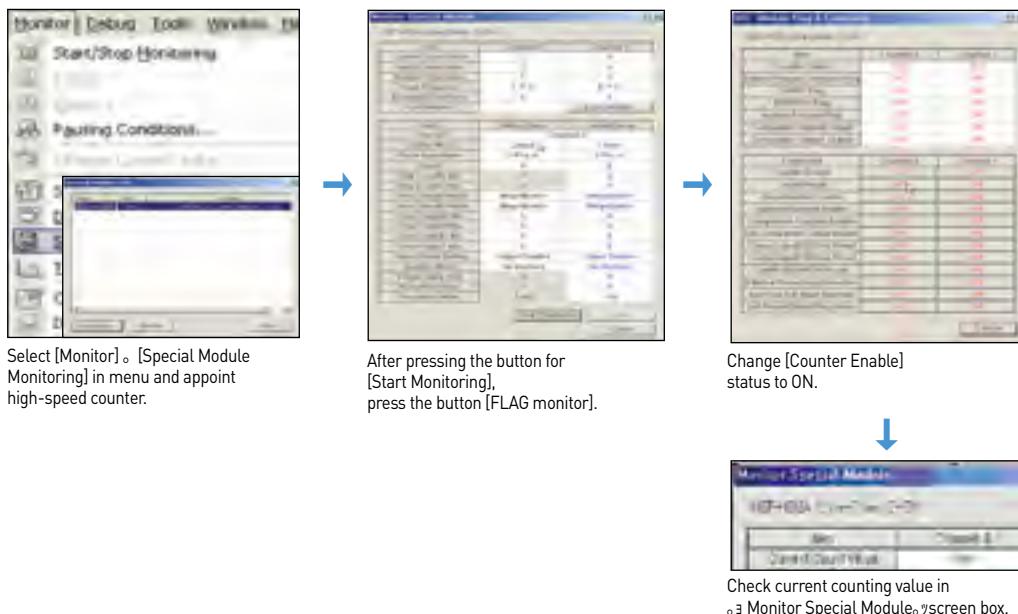


Parameter setting

- In I/O parameter setting box, select slot and analog module that you want to use.
(This example shows to select 2-channel line driver.)

Press the <Details> button at lower end of parameter setting box after selecting the module.

Input 1000 as Max. and Min. comparison output.

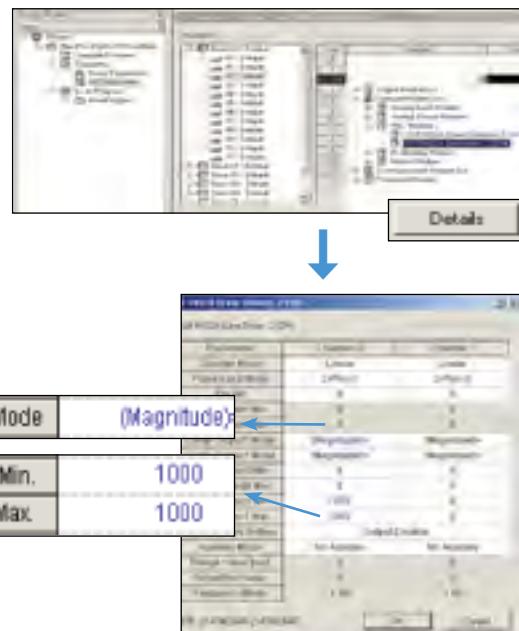

programming

- After completing programming like following figure, download it to PLC and check operation status.

Special devices for programming

Refer to user's manual for more details.

U02.23.0: Count operation admission

U02.23.1: Count preset

U02.23.4: Consistent output admission

U02.23.5: Output external terminal admission


U02.23.6: OUT0 consistent signal reset

U02.00.6: Contact for checking external output


[Practically effective output is
outputted through OUT0 terminal]

U02.02~U02.03: Counter present value


Uxy_aa.bb
x: Base number
y: Slot number
aa,bb: Refer to user's
manual

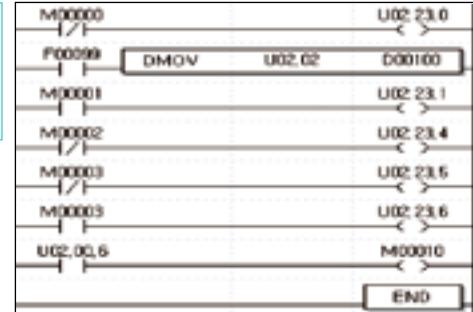

After downloading, monitor operation status.

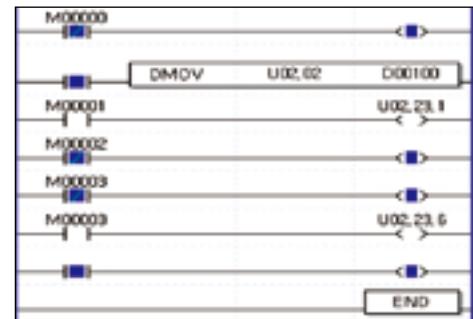

For monitoring just present value, follow the example.

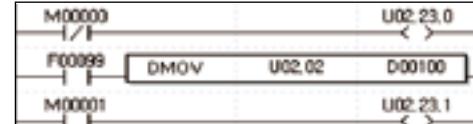



Features

- Max 4Axis, Max pulse output 4Mpps
- Circular/linear/ellipse/helical interpolation
- Asymmetric acceleration and deceleration driving
- FRAM parameter
- XG5000 monitoring, simulation, trace
- CAM profile program

**Specifications**

Item	XGF-P01H XGF-PD1H	XGF-P02H XGF-PD2H	XGF-P03H XGF-PD3H	XGF-P04H XGF-PD4H			
Number of axis	1 axis	2 axis	3 axis	4 axis			
Interpolation	-	Circular, linear, ellipse	Circular, linear, helical, ellipse				
Control method		Position control, speed control, speed/position control, position/speed control, FEED					
Positioning data	Each axis has 400 data items (Operation step number 1~400). It is available to set with XG5000 or programming.						
Configuration Tool	XG5000 (Connected with USB or RS-232C Port of CPU module)						
Data backup	FRAM (Parameter, Operation data), Flash memory (CAM Data), No battery						
Pulse output	XGF-POxH: Open collector, XGF-PDxH: linedriver						
Positioning	Positioning method	Absolute / Incremental					
	mm	-214,748,364.8 ± 214,748,364.7(nA)					
	inch	-21,474,83648 ± 21,474,83647					
	degree	-21,474,83648 ± 21,474,83647					
	pulse	-2,147,483,648 ± 2,147,483,647					
	mm	0.01 ± 20,000,000.00(nA/min)					
	inch	0.001 ± 2,000,000.00(inch/min)					
	degree	0.001 ± 2,000,000.00(degree/min)					
	pulse	1 ~ 500,000(pulse/sec): Open collector, 1 ~ 4,000,000(pulse/sec): linedriver					
	RPM	0.1 ± 100,000.0(RPM)					
Accel/Decel pattern		Trapezoidal & S-curve acceleration/deceleration					
Accel/Decel time		0~2,147,487ms					
Max. output pulse	Open collector: 500kpps, line driver: 4Mpps						
Max. distance	Open collector: 5m, line driver: 10m						
Max. encoder input	500kpps						
Error display	LED						
Size of cable	AWG #24						
Occupied points of I/O	64 points (Fixed type), 16 points (Variable type)						
Connection connector	40Pin		80Pin				
Current consumption (mA)	XGF-P01H:400mA	XGF-P02H:410mA	XGF-P03H:420mA	XGF-P04H:430mA			
	XGF-PD1H:520mA	XGF-PD2H:600mA	XGF-PD3H:850mA	XGF-PD4H:890mA			
	120		130				

Terminal block configuration

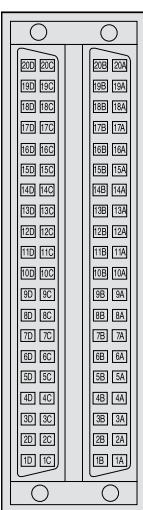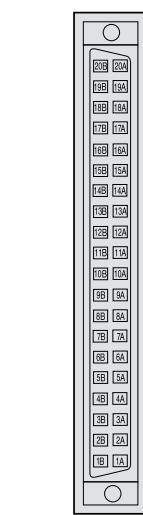

Pin number				Signal name		Remarks
AX1	AX2	AX3	AX4			
20A				MPG A+	Manual pulse generntor /Encoder A+ input	
20B				MPG A-	Manual pulse generntor /Encoder A- input	
19A				MPG B+	Manual pulse generntor /Encoder B+ input	
19B				MPG B-	Manual pulse generntor /Encoder B- input	
20C, 19C, 20D, 19D				NC	Not used	
18A	18B	18C	18D	FP+	Foward pulse (+)	
17A	17B	17C	17D	FP-	Foward COM (-)	
16A	16B	16C	16D	RP+	Backward pulse (+)	
15A	15B	15C	15D	RP-	Backward COM (-)	
14A	14B	14C	14D	OV+	Max. signal	
13A	13B	13C	13D	OV-	Min. signal	
12A	12B	12C	12D	DOG	Appoximate orgin signal	
11A	11B	11C	11D	EMG	Emergency stop	
11A	11B	11C	11D	STOP	External stop signal	
10A	10B	10C	10D	VTP	Speed / Position switching signal	
9A	9B	9C	9D	COM	Common(OV+,OV-,DOG,EMG,STOP,VTP)	
8A	8B	8C	8D	DR	Drive ready signal	
7A	7B	7C	7D	INP	In-position	
6A	6B	6C	6D	DR/INP COM	Drive ready / In-position Common	
5A	5B	5C	5D	CLR	Deviation counter clear signal	
4A	4B	4C	4D	CLR COM	Deviation counter clear signal Common	
3A	3B	3C	3D	HOME +5V	Zero signal (+5V)	
2A	2B	2C	2D	HOME COM	Zero signal (+5V) Common	
1A, 1C				+24V	+24V	
1B, 1D				+24V COM	+24V GND	

*Open collector type module : +24V {1A/1C: 24V, 1B/1D: 0V}

Positioning module(Network Type)

Features

- XGF-PN8A : Dedicated LS ELECTRIC EtherCAT Network Support (XGT Servo N series)
- XGF-PN4B/8B/16B : Standard EtherCAT Network Support(Standard EtherCAT Servo)
- Direct connect with servo driver Max 16
- 2~8 axis linear interpolation, 2axis circular interpolation, 3axis helical interpolation
- Position, speed, feed control is possible through the various operation
- Parameters, the operation data stored in the FRAM(without Battery)
- CAM for controlling up to eight different types of CAM data



Specifications

Item	XGF-PN8A	XGF-PN4B	XGF-PN8B	XGF-PN16B		
Number of axis	8 axis	4 axis	8 axis	16 axis		
Interpolation	2~8 axis linear, 2axis circular, 3axis helical interpolation					
Control method	Position, speed, Speed/position, position/speed position/torque, Feed control					
Setting unit	pulse, mm, inch, degree					
Positioning data	Each axis has 400 data items (Operation step number 1~400). It is available to set with software package or programming.					
XG5000	Port	RS-232C, USB				
	Data	Basic, expansion, manual, servo parameter, operation data, cam data, command information				
	Monitor	Operation, trace, input sort, error information				
	Back-up	FRAM(parameter, operation data) no battery				
Positioning	Positioning method	Absolute/Incremental				
	Position address range	Absolute	Incremental	Speed/position, position/speed conversion control		
		mm	-214748364.8 ~ -214748364.7[nA ₁]	-214748364.8 ~ -214748364.7[nA ₁]		
		inch	-21474.83648 ~ 21474.83647	-21474.83648 ~ 21474.83647		
		degree	-21474.83648 ~ 21474.83647	-21474.83648 ~ 21474.83647		
		pulse	-2147483648 ~ 2147483647	-2147483648 ~ 2147483647		
	Position speed range	mm	0.01 ~ 2000000.00(mm/Min)			
		inch	0.001 ~ 2000000.000(inch/Min)			
		degree	0.001 ~ 2000000.000(degree/Min)			
		pulse	1 ~ 20.000.000(pulse/Sec)			
		RPM	0.1 ~ 100000.0(RPM)			
	Accel/Decel pattern	Trapezoidal & S-curve acceleration/deceleration				
	Accel/Decel time	1~2.147.483.647 ms				
	Manual	Jog/ MPG/ inching				
	Homing method	[XGF-PN8A] Upper limit+Z phase(CW), lower limit+Z phase(CCW), DOG+Z phase(CW), DOG+Z phase(CCW), upper limit+DGO+Z phase(CW), upper limit+DGO+Z phase(CCW), Z phase(CW), Z phase(CCW), DGO(CW), DGO(CCW) [XGF-PN4B/PN8B/PN16B] Refer to the method supported by the servo driver				
	The ability to Change speed	Absolute/Percent				
	Torque	Rated torque %				
	Absolute position System	0 (Absolute encoder type servo)				
	Encoder input	Channel	2 Channel			
		Max. Input	Max. 200 Kpps			
		Input method	line-drive input(RS-422A IEC), open collector output type			
		Type	CW/CCW, Pulse/Dir, Phase A/B			
		Connector	12 Pin connector			
	Communication Cycle	800 nA _f	1 ms			
	Max. distance	100 m				
	Cable	STP(Shielded Twisted pair) cable				
	Error display	LED				
	Operation display	LED				
	Occupied points of I/O	64points (Fixed type), 16points (Variable type)				
	Current consumption (mA)	500 mA				
	Weight(kg)	115 g				

Terminal block configuration

XGF-PN8B/XGF-PN4B/XGF-PN8A		
Pin No.	Signal name	Signal direction
1	ENC1A+	Encoder 1 A+ input
2	ENC1A-	Encoder 1 A- input
3	ENC1B+	Encoder 1 B+ input
4	ENC1B-	Encoder 1 B- input
5	ENC1Z+	Encoder 1 Z+ input
6	ENC1Z-	Encoder 1 Z- input
7	ENC2A+	Encoder 2 A+ input
8	ENC2A-	Encoder 2 A- input
9	ENC2B+	Encoder 2 B+ input
10	ENC2B-	Encoder 2 B- input
11	ENC2Z+	Encoder 2 Z+ input
12	ENC2Z-	Encoder 2 Z- input

XGF-PN16B		
Pin No.	Signal name	Signal direction
1	ENC1A+	Encoder 1 A+ input
2	ENC1A-	Encoder 1 A- input
3	ENC1B+	Encoder 1 B+ input
4	ENC1B-	Encoder 1 B- input
5	N.C	N.C
6	N.C	N.C
7	ENC2A+	Encoder 2 A+ input
8	ENC2A-	Encoder 2 A- input
9	ENC2B+	Encoder 2 B+ input
10	ENC2B-	Encoder 2 B- input
11	N.C	N.C
12	N.C	N.C

External encoder wiring

XGF-PN8B/XGF-PN4B/XGF-PN8A		
Pin No.	Signal	
1	ENC1A+	Encoder 1A+ input
2	ENC1A-	Encoder 1A- input
3	ENC1B+	Encoder 1B+ input
4	ENC1B-	Encoder 1B- input
5	ENC1Z+	Encoder 1Z+ input
6	ENC1Z-	Encoder 1Z- input
7	ENC2A+	Encoder 2A+ input
8	ENC2A-	Encoder 2A- input
9	ENC2B+	Encoder 2B+ input
10	ENC2B-	Encoder 2B- input
11	ENC2Z+	Encoder 2Z+ input
12	ENC2Z-	Encoder 2Z- input

*Note1: Wiring of encoder 1 is example about 5V voltage output type (open collector). When using 12V, 24V type MPG, change the input voltage from 5V to 12V or 24V and in case of 12V, connect 910Ω resistor to ENC1A+[pin 1], ENC1B+[pin3], in case of 24V, 2.4kΩ resistor, before connecting the power source (adding PULL-UP resistor is needed)

*Note2: Wiring of encoder 2 is example about 5V voltage output type (line driver)

XGF-PN16B		
Pin No.	Signal	
1	ENC1A+	Encoder 1A+ input
2	ENC1A-	Encoder 1A- input
3	ENC1B+	Encoder 1B+ input
4	ENC1B-	Encoder 1B- input
7	ENC2A+	Encoder 2A+ input
8	ENC2A-	Encoder 2A- input
9	ENC2B+	Encoder 2B+ input
10	ENC2B-	Encoder 2B- input

*Note1: Wiring of encoder 1 is example about 5V voltage output type (open collector). When using 12V, 24V type MPG, change the input voltage from 5V to 12V or 24V and in case of 12V, connect 910Ω resistor to ENC1A+[pin 1], ENC1B+[pin3], in case of 24V, 2.4kΩ resistor, before connecting the power source (adding PULL-UP resistor is needed)


*Note2: Wiring of encoder 2 is example about 5V voltage output type (line driver)

Features


- Configuration tool with updated APM software package
- All models can be used for XGT Positioning module(APM, XPM)
- Simultaneous communications can be accessed with XG5000
- Powerful simulation, trace, monitoring




System View

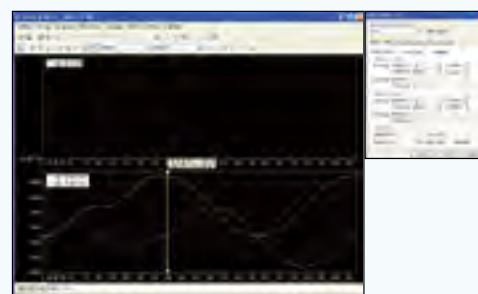


Data trace (trend graph)

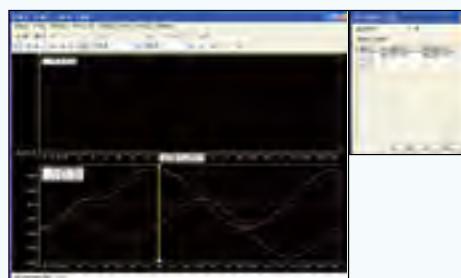

Data trace (XY graph)

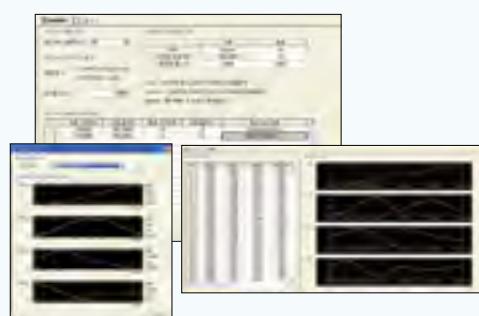XYZ trend
(3D View)XYZ monitor
(2D View)

CAM control profile

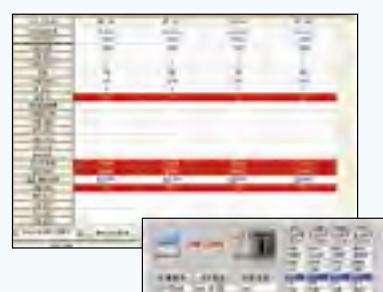

Simulation

Motion Module[EtherCAT]

Programmable Logic Controller 118 / 119

Features.


- Supports Standard Network
 - Servo Drive control through EtherCAT CoE protocol
 - EtherCAT I/O connectivity
 - Comm. Speed: 100Mbps, Distance: Max. 100M
- Various Motion Functions
 - Max. 36 Axes(including virtual axes) with synchronous and cam block settings
- XGF-M32E
 - 32 Real-axes, 4 Virtual-axes, 4 EtherCAT I/O stations supported
 - Programming Language: LD(FB), ST
 - Engineering Tool: XG-PM
- XGF-XM32E
 - 32 Real-axes, 4 Virtual-axes, 32 EtherCAT I/O stations supported
 - Programming Language: LD(FB), ST, G Code
 - Engineering Tool: XG5000
 - Moving Magnet Solution Supported
 - Backup/Restore using SD Card




Specifications

ITEM		XGF-M32E	XGF-XM32E
Communication		EtherCAT CoE	EtherCAT CoE (MDP)
Num. of Axes	Real	32 Axes	32 Axes
	Virtual	4 Axes	4 Axes
	Slave	4 Slave	32 Slave
	I/O	8 Points each	-
Control Unit		Pulse, mm, inch, degree	pulse, mm, inch, degree
Motion Program	No. of program	Max. 256	Max. 256
	Capacity	2MB	5MB(Motion), 5MB(NC)
	Language	LD(FB), ST	LD(FB), ST, G Code
Control Method		Position, Velocity, Torque, Synchronous, Interpolation Control	Position, Velocity, Torque, Synchronous, Interpolation Control
Range of Position/Velocity		±LREAL, 0	±LREAL, 0
Acc. Dec. Process		Trapezoid type, S-type	Trapezoid type, S-type
Acc. Dec. Time		1~2,147,483,647ms	1~2,147,483,647ms
Manual Operation		JOG Operation	JOG operation
Torque Unit		Rated torque % designation	Rated torque % designation
Encoder Input	Channel	2 CH	-
	Max. Input	500Kpps	
	Input Method	Line Drive / Open Collector	
	Input Type	CW/CCW, Pulse/Dir, Phase A/B	
Cam Operation		Time/Position Synchronous Cam	Time/Position Synchronous Cam
Coordinate System Function		Rectangular coordinates	Cartesian, Delta
Communication Period		1ms/2ms/4ms	1~20ms
Comm. Physical Layer/Distance		100BASE-TX/100m	100BASE-TX/100m
Consumable Current(mA)/Weight [g]		900/122	700/80
External Memory		Not Supported	Supported(Micro SDHC, SDXC)
Engineering Tool		XG-PM	XG5000

System Configuration

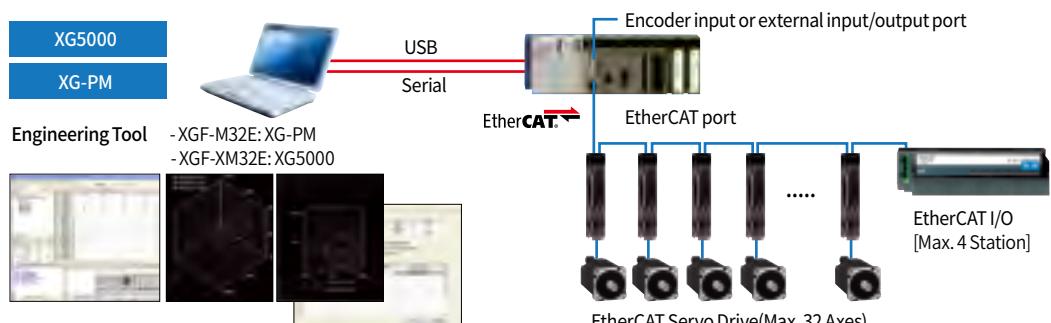

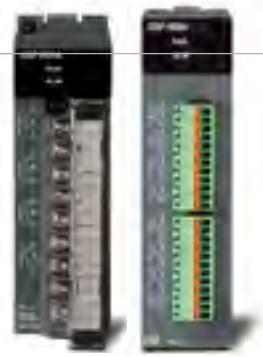



Features

- Supports various additional functions (average, alarm, filter)
- Special module parameter setting and monitoring with XG5000
- Supports digital conversion, temperature display and user scaling
- Support Offset/Gain function[only RD8A]


Specifications

Item		XGF-RD4A	XGF-RD4S	XGF-RD8A
No. of input channel		4 channels	4 channels	8 channels
Input sensor type	Pt100	JIS C1604-1997	JIS C1604-1997	JIS C1604-1997
	JPt100	JIS C1604-1981, KS C1603-1991	JIS C1604-1981, KS C1603-1991	JIS C1604-1981, KS C1603-1991
	PT1000	-	JIS C1604-1997	-
	NI100	-	DIN 43760-1987	-
Temperature input range	Pt100	-200.0 ~ 850.0°C	-200.0 ~ 850.0°C	-200.0 ~ 850.0°C
	JPt100	-200.0 ~ 640.0°C	-200.0 ~ 640.0°C	-200.0 ~ 640.0°C
	PT1000	-	-200.0 ~ 850.0°C	-
	NI100	-	-60.0 ~ 180.0°C	-
Digital output	Temperature display (unit: 0.1)	Pt100: -2,000 ~ 8,500 JPt100: -2,000 ~ 6,400 PT1000: - NI100: -	Pt100: -2,000 ~ 8,500 JPt100: -2,000 ~ 6,400 PT1000: -2,000 ~ 8,500 NI100: -2,000 ~ 1,800	Pt100: -2,000 ~ 8,500 JPt100: -2,000 ~ 6,400 PT1000: - NI100: -
	Scaling display (Customize)	0 ~ 65535 -32768 ~ 32767	0 ~ 65535 -32768 ~ 32767	0 ~ 65535 -32768 ~ 32767
	Accuracy	Normal temp.(25.0°C): ±0.2% Full temp.(0~55.0°C): ±0.3%	±0.1% ±70ppm/°C	±0.2% ±0.3%
	Conversion speed	40ms / channel		
Insulation	Channel to Channel	Non-insulation	Insulation	Non-insulation
	Terminal to PLC Power	Photo-coupler		
Wiring method		3-wire	4-wire	3-wire
Function	Average	Time average (320~64000ms) Counting average(2~64000 count) Moving average(2~100 samples)		
		Process alarm Input changing rate alarm Disconnection detection		
		Offset / Gain		
	Filtering	- Digital filter (160~64000ms)		
Terminal block		18-point terminal block		
Current consumption		5V: 450mA	5V: 780mA	5V: 780mA
Weight [g]		150g		

Characteristics of temperature conversion

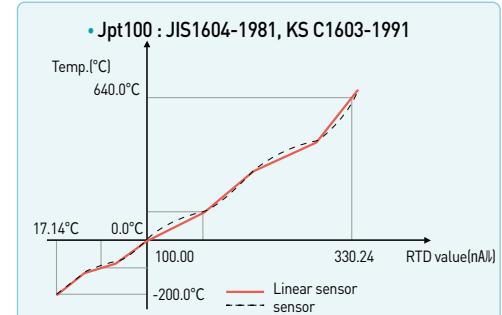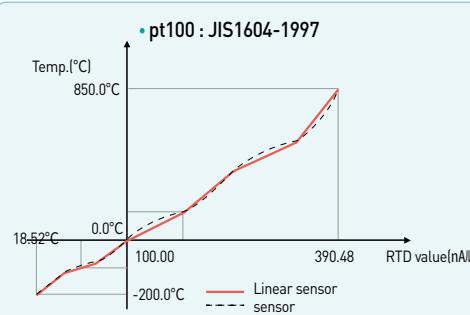

Wiring

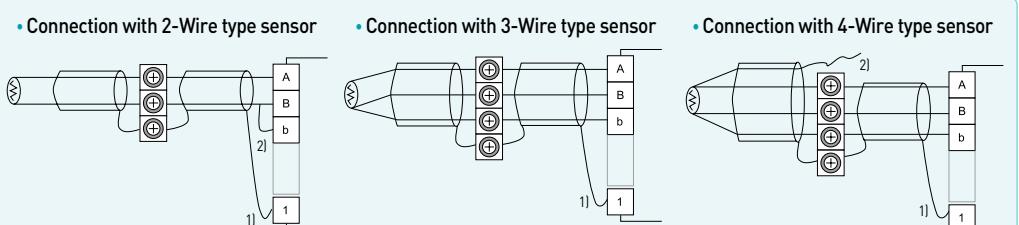

1) When sensor and compensating wire are shielded, shield-connection to FG terminal of the module is available.

2) The wiring of 4-wire type sensor is identical with the wiring of 3-wire type sensor. 3 wires is connected to the module.

But the other wire is not connected with the module.

Thermocouple module

Programmable Logic Controller 120 / 121




Features

- Insulation between channels
- $\pm 0.1\%$ (25°C) constant density
- Supports various input sensor (supporting C-type sensor)
- Various additional functions (average, filter, alarm, max/min value display)
- Special module parameter setting and monitoring with XG5000

Specifications


Item	XGF-TC4S	
Input channels	4 channels	
Input sensor type	K, J, E, T, B, R, S, N, C	JIS C1602-1995ITS-90
	K	-250 ~ 1350
	J	-200 ~ 1200
	E	-250 ~ 1000
	T	-250 ~ 400
	B	400 ~ 1800
	R	-50 ~ 1750
	S	-50 ~ 1750
	N	-270 ~ 1300
	C	0 ~ 2300
	Temperature display (unit: 0.1)	Display down to the first decimal place (0.1°C)
Digital output	Scaling (User range setting)	0 ~ 65535 -32768 ~ 32767
	Normal temp. (25°C)	$\pm 0.1\%$
Accuracy	Temperature coefficient (Operating temp. range)	Some section can permit 0.5% $\pm 100\text{ppm}^\circ\text{C}$
Conversion speed	40ms/ channel	
Insulation	Between terminals and power	Insulation(Photo-Coupler)
Compensation	Automatic compensation by RJC sensing [PT100]	
	Compensation degree	$\pm 1.0\%$
	Average	Average time (320 ~ 6400ms) Average number (2~ 64000) Average move (2 ~100) Process Alarm
Function	Alarm	Change rate alarm Burn-out detection
	Filter	Digital filter (160 ~ 64000ms)
	Max./Min. values display	Max./Min. values display
Terminal block	18-point terminal block	
Current consumption	5V : 610mA	
Weight (kg)	0.150	

Input wiring

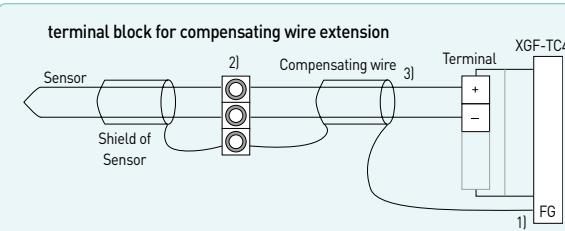

- 1) When sensor and compensating wire are shielded, shield connection to FG terminal is available.
- 2) To minimize an error, overall temperature of block terminal need to be equal.
- 3) Compensating sensor should be the same type of sensor which is used for measurement.

Characteristics of I/O conversion

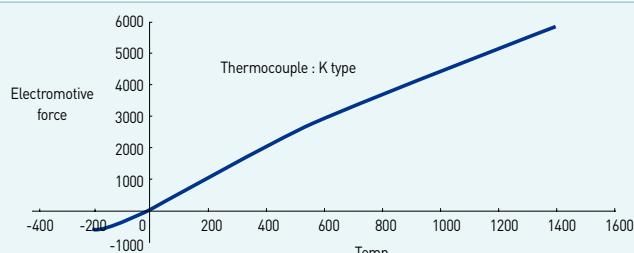

Features**XGF-TC4UD**

- Optimum temperature control
- Universal input: TC, RTD, Voltage, Current
- Isolated input
- Output: Current/Transistor
- Parameter setting via dedicated software: TG-CON
- Variety of control types
 - PID control
 - Cascade control
 - On/ Off control
- Disconnection detection
- Various input functions: Bias, Filter, Square root
- Auto-tuning

**XGF-TC4RT**

- Input RTD : Pt100, JPt100, Pt1000
- Control Type : PID, On / Off Control


Specifications

Item	XGF-TC4UD			XGF-TC4RT
No. of loop	4 loops			4 loops
Input	Thermo couple	K	-200 ~ 1300 °C	
			0 ~ 500 °C	
		J	-200 ~ 1200 °C	
			0 ~ 500 °C	
		E	-200 ~ 1000 °C	
		T	-200 ~ 400 °C	
		B	400 ~ 1800 °C	
		R	0 ~ 1700 °C	
		S	0 ~ 1700 °C	
		N	-200 ~ 1300 °C	
	RTD	C(W5Re/W26Re)	0 ~ 2300 °C	
		PL II	0 ~ 1300 °C	
		L	-200 ~ 900 °C	
		U	-200 ~ 600 °C	
Voltage	DC mV	Pt100	-200 ~ 850 °C	-200 ~ 850 °C
		JPt100	-200 ~ 600 °C	-200 ~ 600 °C
	DC V	Pt1000	-200 ~ 800 °C	-200 ~ 800 °C
		0 ~ 10mV		
	DC V	0 ~ 100mV		
		0 ~ 1V		
		1 ~ 5V		
		0 ~ 5V		
		0 ~ 10V		
Current	DC mA	-5V ~ 5V		
		10V ~ 10V		
Input channel	4 channels[Input type selection per channel]	4 ~ 20mA		
		0 ~ 20mA		

Specifications

Item	XGF-TC4UD			XGF-TC4RT		
Resolution	Resolution Refer to the user's manual [Resolution for each input type]					
Cold junction compensation	Compensation	Automatic compensation by RJC sensor		-		
	Precision	$\pm 0.2^\circ\text{C}$		-		
Digital output	Temperature display	0.1°C/1°C [Selection by software]		0.1°C		
	Linear display	0-1000		-		
	Scale display	Only for voltage/current input Range : -3,000-3,000 Setting range: 0~3000		-		
Conversion speed	200ms / module			400ms / 4loops		
Control type	PID, On/Off control					
Parameter	Set value [SV]	Selection per input type				
	Gain	0 : ON/OFF control, Real type		Range : 0.000-10000.000		
	Integrated time	0 : No Differential control, Real type		Range : 0.000-10000.000		
	Differential time	0 : No Integrated control, Real type		Range : 0.000-10000.000		
Output	No. of output channel	8 channels (PWM or analog output)		4 channels		
	PWM	Rated load voltage	DC 24V			
		Max. current point	0.1A points			
		On voltage drop	DC 0.3V or less			
		Off leakage current	0.1mA or less			
		Response time	ON → OFF	1ms or less		
			OFF → ON	1ms or less		
		Periodic	0.5~120.0sec (resolution: 0.5sec)	0.5~100.0sec (resolution: 0.1s)		
		Time resolution	High value between 10ms or 0.5% of full scale			
	Analog output	Range	4~20mA			
Insulation	Resistance	600nA or less		-		
	Resolution	$\pm 1.0\%$, 25°C				
	Precision	8nA				
	Item	Insulation	Insulation withstand voltage	Insulation resistance		
Warm-up	Channel - Channel	Trans	500V AC, 50/60Hz 1min,	500V DC, 10MnA or more		
Terminal	Input terminal - PLC	Photocoupler	Leakage 10mA or less			
Power	Current output - Current output	Non insulation				
Current consumption	External power- Output					
20min or more				-		
18 points terminal						
5V, DC 24V (external)						
DC 5V : 900mA (Internal) DC 24V : 300mA (external)				DC 5V: 310mA DC 24V: 28mA		

Example : Constant temperature

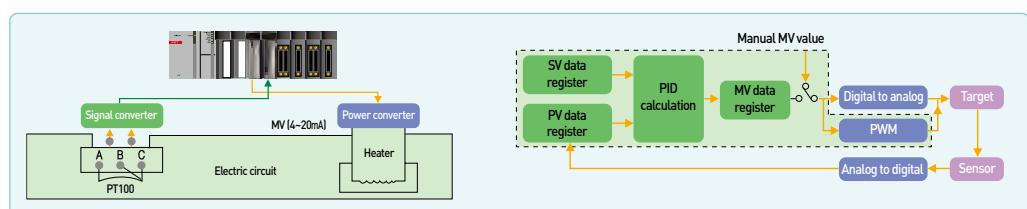


XG-TCON

- The configuration tool for the temperature control module
- Easy parameter settings, data monitoring and trend-monitor support
- Auto-tuning operation command to speed up the system is set up and test operation



Data Monitor

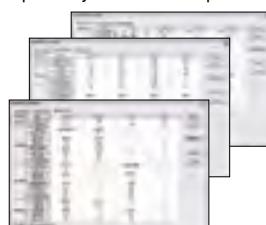

Parameter setting(input parameter)




Trend monitor

Features


- SOE: Sequence Of Events Recorder
- I/O information collection to analyze the control system in Generation and Transformer
- Event collection in every 1ms
- Max. 300ea data available
- Data retain by built-in memory
- Max. installable module: 16ea
- Event monitoring of history through SOE Viewer

**Specifications**

Item	XGF-SOEA
No. of input point	32 points
Insulation method	Photo-Coupler Insulation
Memory size	1Mbit
The first event setting time	CPU RTC : 1 ms (± 2 ms : delay between modules) RS-422 IRIG-B : 1 ms (± 0.5 ms : delay between modules)
Rated input voltage	DC24V
Rated input current	Approx. 4mA / points
Voltage range	DC20.4 ~ 28.8V(5% and lower ripple rate)
On voltage/On current	DC19V and higher / 3 mA and higher
Off voltage/ Off current	DC11V and lower / 1.7 mA and lower
Input resistance	Approx. 5.6 k Ω
Response time [ms]	Off → On : 100us+Input filter time(User setting: 0~100ms) On → Off : 150us+Input filter time(User setting: 0~100ms)
Clock Synchronization	CPU RTC or RS-422 by IRIG-B format
Withstand voltage	AC560V rms / 3 Cycle (altitude 2000m)
Insulation resistance	10M Ω and higher (DC500V)
COMM method	32point / COM
Current consumption	0.4 A (MAX)
Operation display	LED On with Input On
External connection method	40point connector
Size(mm)	27x98x90
Weight	0.2 kg

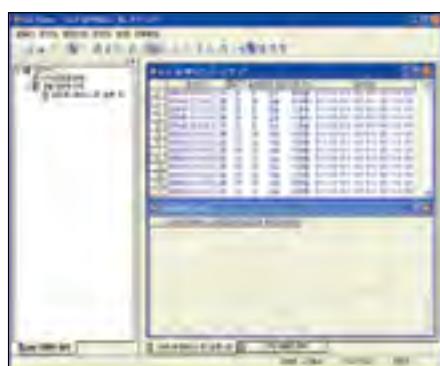SOE Viewer

Monitoring window

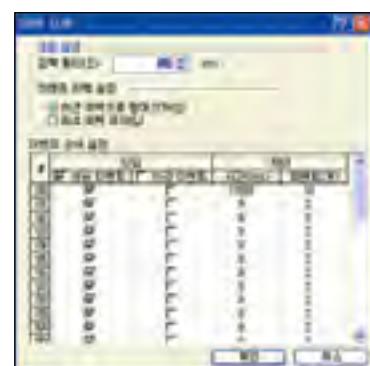

Parameter setup

Datalog module

Programmable Logic Controller 124 / 125

Features


- Capable to easily save PLC device data without PC
- Capable to save PLC control data without missing any change
 - Data can be saved whenever scanning is done or they can be saved at an interval of several ms(milliseconds).
- Capable to save a large volume of data file
 - Long-term data saving is available since CF card and USB memory with a large volume of up to 16GB can be used.




Specifications

	Item	XGF-DL16A																																
CF Card	Voltage of power supply	3.3V ± 5%																																
	Card Type	CF200I(Transcend's Industrial CF card)																																
	Compatibility Capacity	1, 2, 4, 8, 16Gbyte																																
	Number of mountable cards	1																																
	Caution	Use only industrial CF cards manufactured by Transcend																																
USB Memory	Voltage of power supply	5.0V ± 5%																																
	Memory Type	USB 2.0 (Host function)																																
	Compatibility Capacity	1, 2, 4, 8, 16Gbyte (Please use USB capacity above CF card capacity)																																
	Saving Method	Auto Saving through PnP function [Activation of PnP auto duplication: when USB is mounted, when power is supplied again]																																
	Number of mountable memories	1(Unavailable to support USB extension cables)																																
Data Type	BOOL	0 or 1																																
	BYTE	00 ~ FF																																
	WORD	0000 ~ FFFF																																
	DWORD	00000000 ~ FFFFFFFF																																
	LWORD	00000000 00000000 ~ FFFFFFFF FFFFFFFF																																
	SINT	-128 ~ 127																																
	INT	-32,768 ~ 32,767																																
	DINT	-2,147,483,648 ~ 2,147,483,647																																
	LINT	-576,460,752,303,423,488 ~ 576,460,752,303,423,487																																
	USINT	0 ~ 255																																
	UINT	0 ~ 65,535																																
	UDINT	0 ~ 4,294,967,295																																
	ULINT	0 ~ 1,152,921,504,606,846,975																																
	REAL	-3.402823466e+038 ~ -1.175494351e-038 or 0 or 1.175494351e-038 ~ 3.402823466e+038																																
	LREAL	-1.7976931348623157e+308 ~ -2.2250738585072014e-308 or 0 or 2.2250738585072014e-308 ~ 1.7976931348623157e+308																																
Data Saving	STRING	Fixed letters (Maximum 8 letters)																																
	Number of Settings	Maximum 8																																
	Number of Data	Maximum 32																																
	Saving Kind	Saved by the ladder program																																
	File Type	CSV file(Extension: csv)																																
	Number of Saving Files	Total 800 (when using 16Gbyte CF memory)																																
	Processing Score(word)	4	16	64	256	1024																												
	Processing Speed(ms)	1	4	10	30	120																												
	Capacity(Gbyte)	1	2	4	8	16																												
	Time(s)	10	20	40	60	120																												
SavingSpeed	Collection Interval	1 ~ 9999999 ms [In consecutive saving]																																
	In/output Occupation Score	32 points 1 slot[Input 22 points, output 10 points]																																
	Clock	Synchronized at PLC CPU time whenever it is scanned																																
	DC5V Internal Consumption Current	0.53A																																
	External Size	98(H)[mm] x 27(W)[mm] x 90(D)[mm]																																
	Weight	0.13kg																																
	CSV File	<table border="1"><thead><tr><th></th><th>A</th><th>B</th><th>C</th><th>D</th></tr></thead><tbody><tr><td>1</td><td>Time</td><td>Index</td><td>DWORD</td><td>WORD</td></tr><tr><td>2</td><td>2011/07/04/09:22:35.038</td><td>1807154</td><td>05701D3C</td><td>1D3C</td></tr><tr><td>3</td><td>2011/07/04/09:22:35.058</td><td>1807155</td><td>05701D3D</td><td>1D3D</td></tr><tr><td>4</td><td>2011/07/04/09:22:35.079</td><td>1807156</td><td>05701D3E</td><td>1D3E</td></tr><tr><td>5</td><td>2011/07/04/09:22:35.098</td><td>1807157</td><td>05701D3F</td><td>1D3F</td></tr></tbody></table>					A	B	C	D	1	Time	Index	DWORD	WORD	2	2011/07/04/09:22:35.038	1807154	05701D3C	1D3C	3	2011/07/04/09:22:35.058	1807155	05701D3D	1D3D	4	2011/07/04/09:22:35.079	1807156	05701D3E	1D3E	5	2011/07/04/09:22:35.098	1807157	05701D3F
	A	B	C	D																														
1	Time	Index	DWORD	WORD																														
2	2011/07/04/09:22:35.038	1807154	05701D3C	1D3C																														
3	2011/07/04/09:22:35.058	1807155	05701D3D	1D3D																														
4	2011/07/04/09:22:35.079	1807156	05701D3E	1D3E																														
5	2011/07/04/09:22:35.098	1807157	05701D3F	1D3F																														

System Configuration

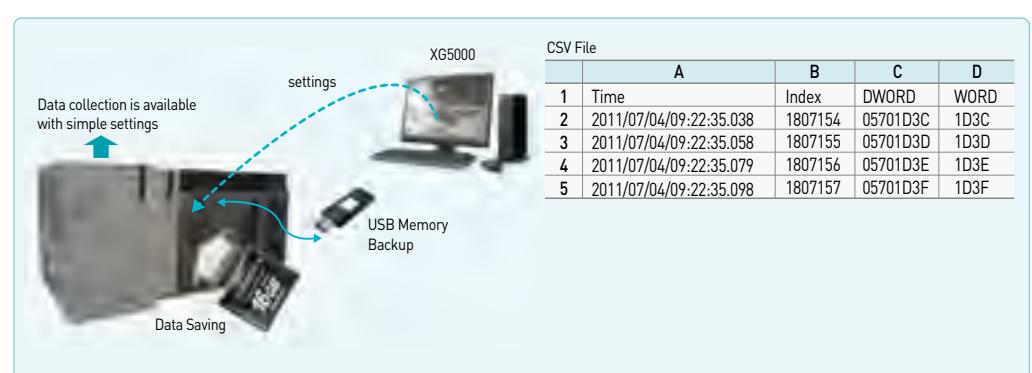

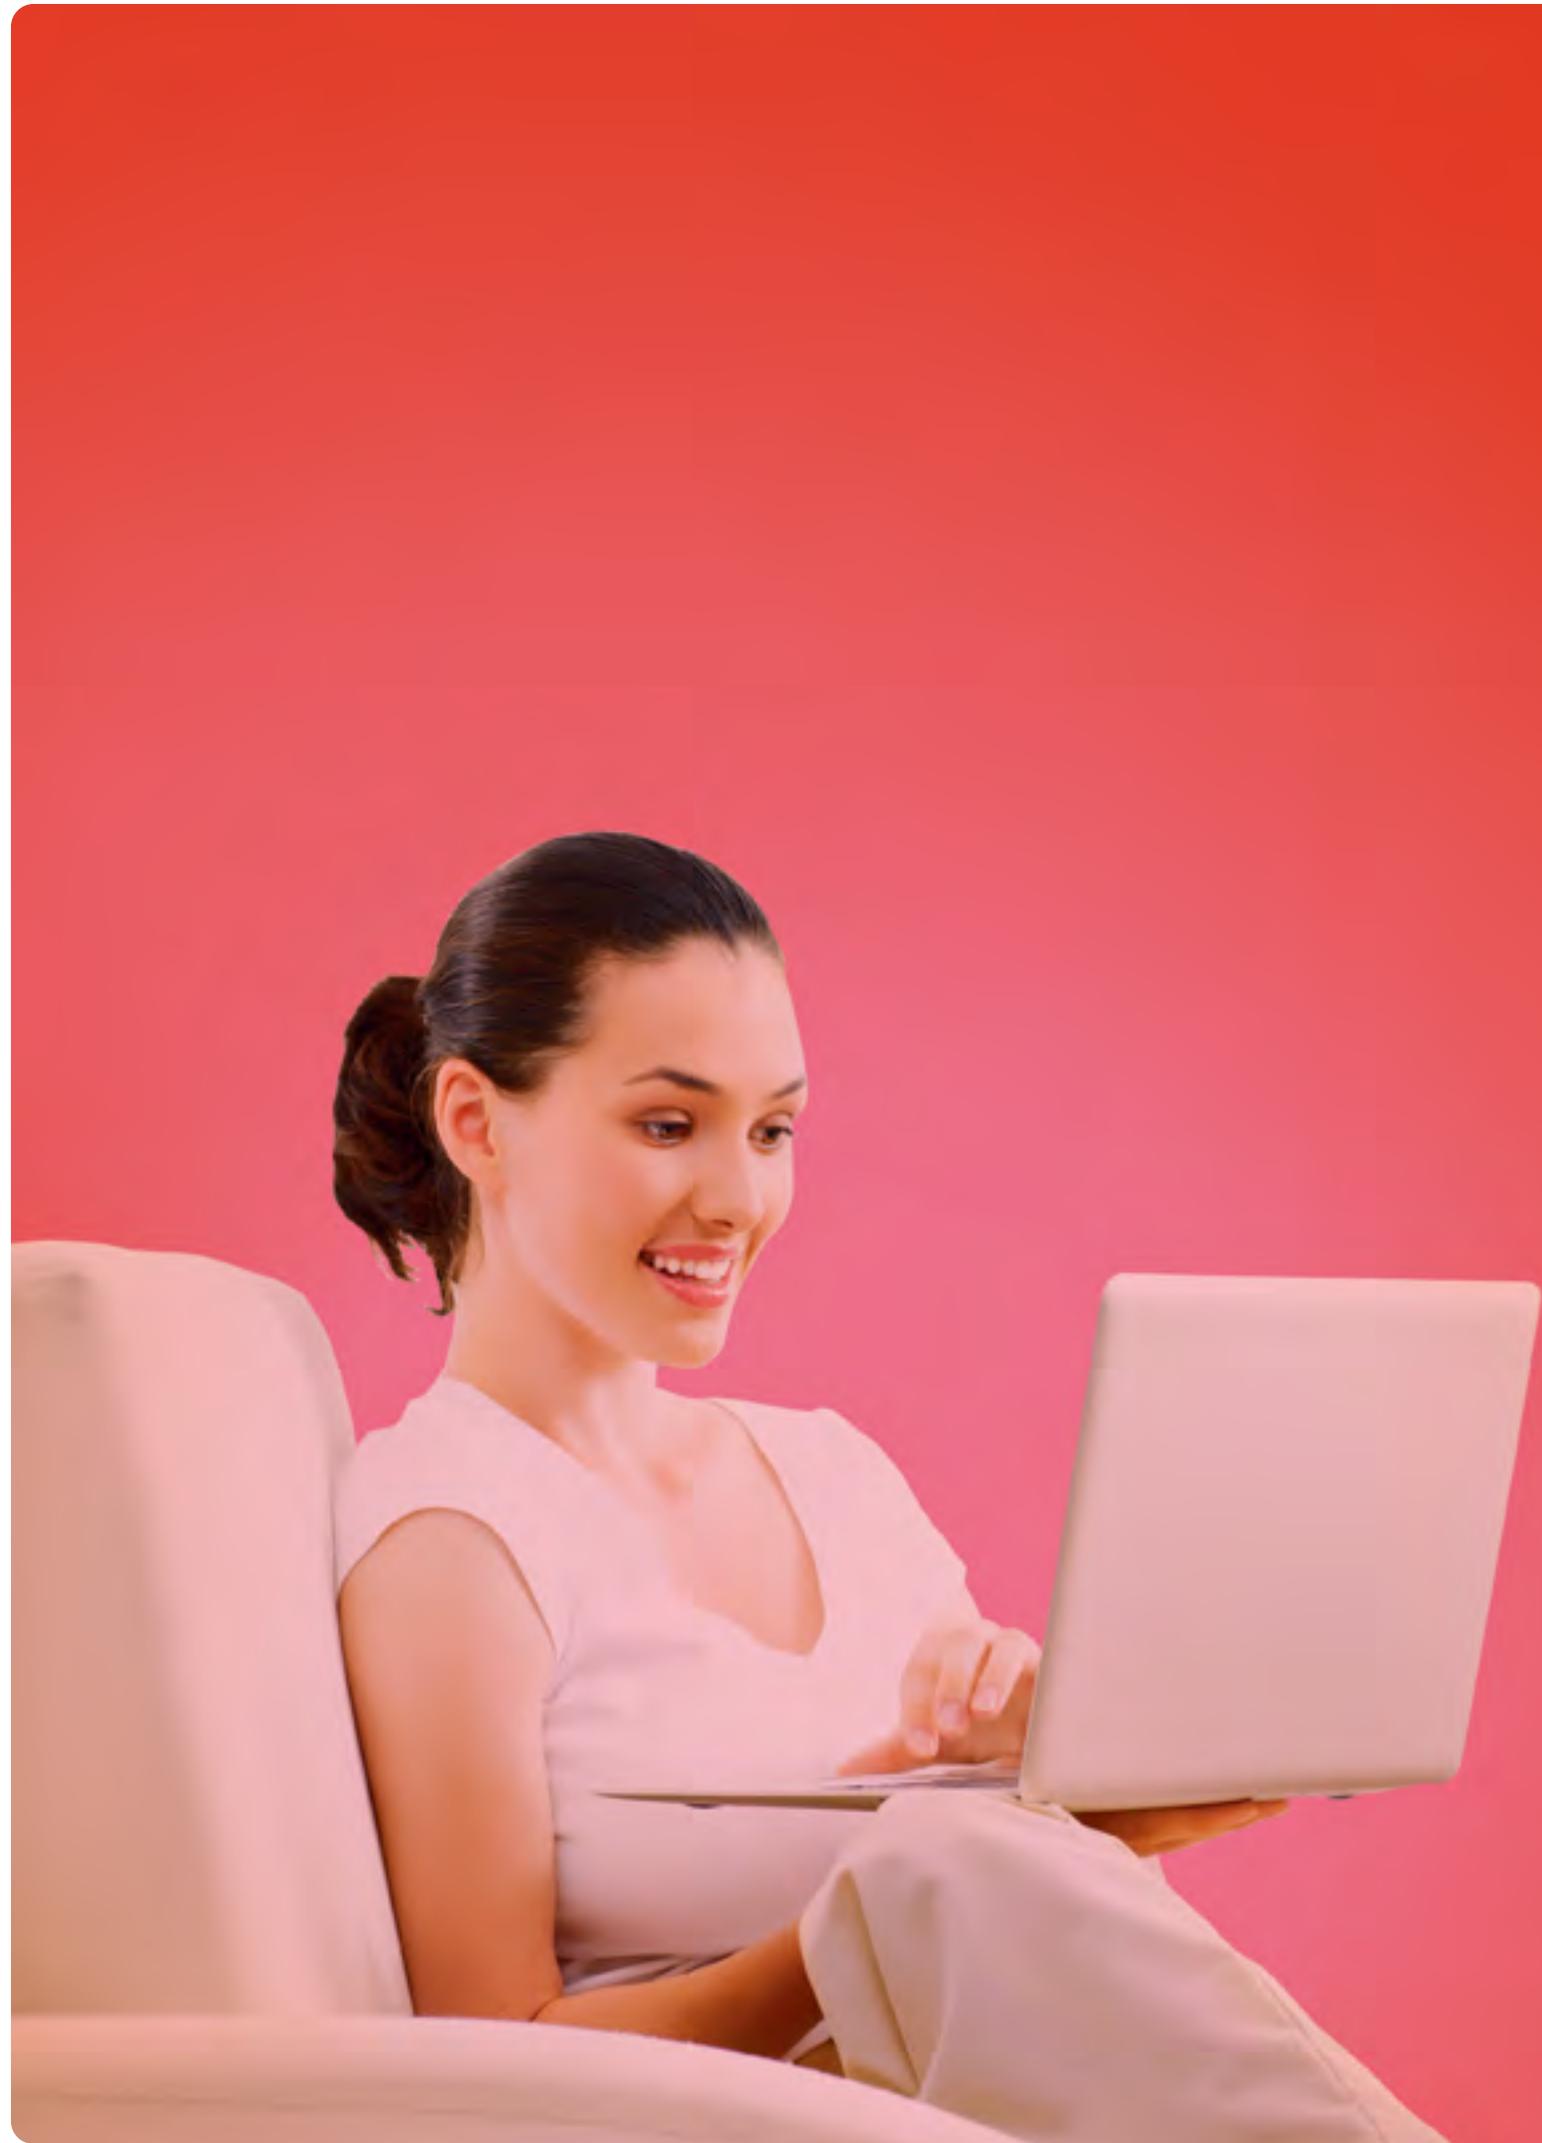




Software

Software innovation for integrated solution.

XG5000 is the optimum software which can cover various programming needs, debugging, and easy maintenance. Especially, XG5000 achieves customer satisfaction with useful maintenance tool by internet.

Contents	126 XG5000 programming
	136 XG5000 Communication Parameters
	138 XGT Panel iXP2 Series
	139 XGT Panel eXP2 Series
	141 APM[Positioning module] Software Package
	142 Product list
	144 Dimensions

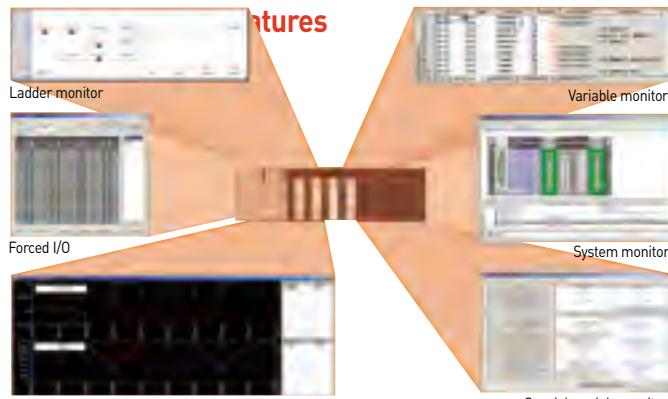

- Program editing & Engineering software
- Windows-based easy operation
- Multi-PLC, Multi-program, Multi-task in one project
- Various monitoring and diagnosis functions
- Windows 2000, XP, VISTA, Win7, Win8(32/64bits) (Limited use in Windows 98, ME)



Programming tools

MPMP (Multi-PLC Multi-programming)


Different PLC systems can be edited, monitored, and managed simultaneously in one project.

Drag & Drop

It is available in project, variable/comment, ladder diagram editing and monitoring.

User-defined shortcut keys

User-defined shortcut keys increase editing convenience.

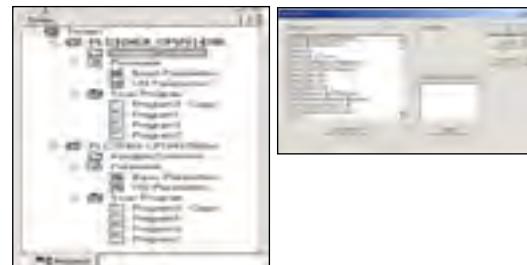


Monitoring



Special module monitoring

Monitoring and test-run of various special modules are available.

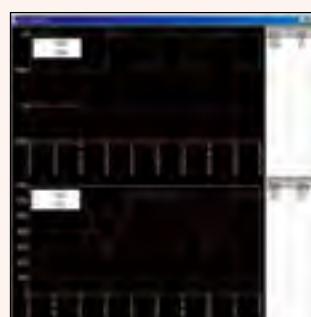


Trend monitoring

The changing value of specific device can be monitored and saved as a file.



System monitoring

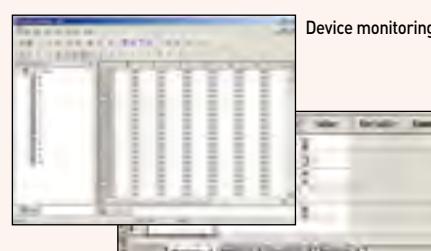


Variable monitoring

System requirement

Item	System requirement
O/S	Windows 2000, XP, VISTA, Win7, Win8(32/64bits) (Limited use in Windows 98, ME)
CPU	IBM compatible PC with Min. 200MHz Pentium processor
Memory	Min. 128M
HDD	100 MB (Free memory space)
Serial port	Communication port for program transmission (RS-232C, USB)
Printer	Compatible with Windows 98 or later
Mouse	Compatible with Windows 98 or later

Variable and programming editing


- Data input like EXCEL
- Cell-unit edit
- Auto Fill function
- Compatible with Microsoft Excel
- Redo and Undo (Unlimited)
- Segment screen edit

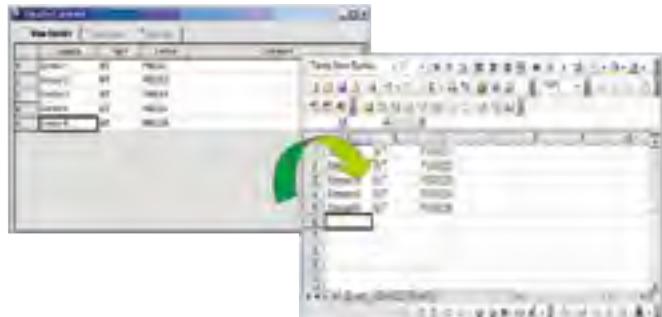

Improved diagnosis and maintenance




Module exchange wizard
It supports safe module exchange during 'RUN' mode.

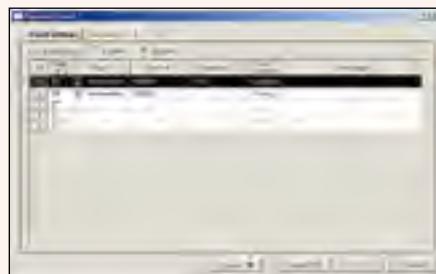

User-defined event
By registering user-defined event, users can read the record of specified event and use it for PLC operation and debugging




Forced I/O
The status of external output device can be checked without program. And when input device breaks down, forced input function specifies ON/OFF and can operate the system without interruption of equipment.

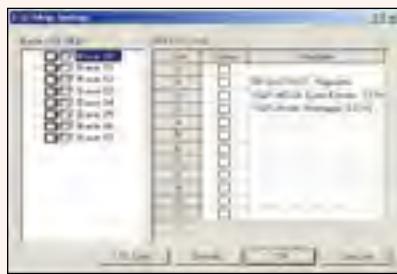


I/O skip, Error Mask
I/O inspection and renewal can be set for specific module and continuous operation is available when an error is occurred.

Program editing

- Start XG5000
- Select [New Project]
- Write project name and select CPU type

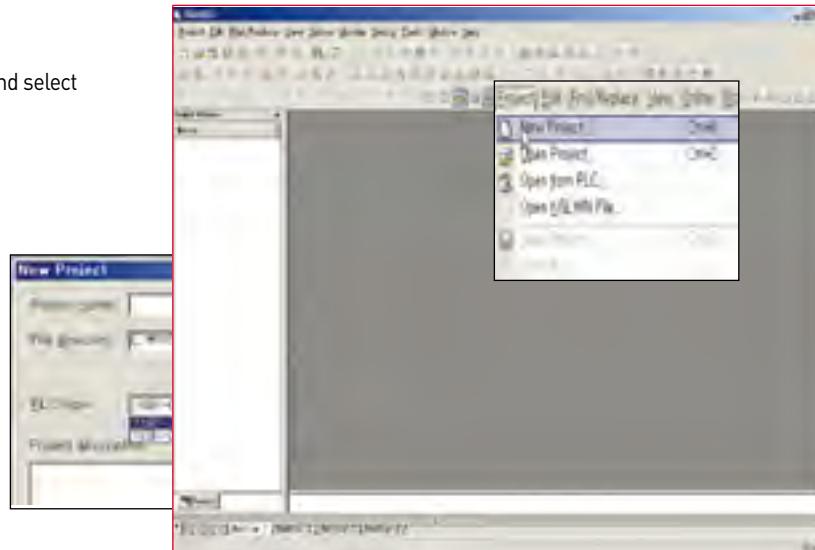**Configure ladder lines as below with ladder input tool bar**

- Select input point and command with ladder tool bar.

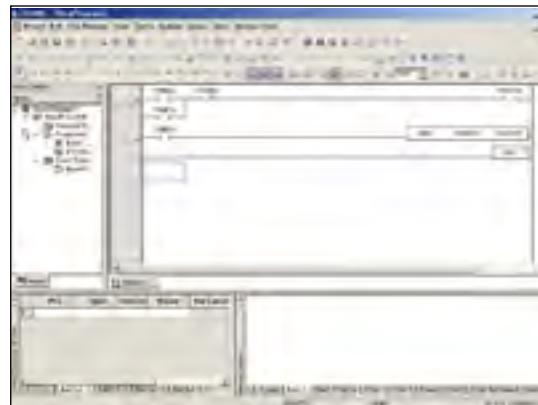

Icon	Description	Short key
[Icon]	Arrow mode	ESC
[Icon]	Normally open contact	F3
[Icon]	Normally closed contact	F4
[Icon]	Positive transition-sensing contact [On for 1 scan when Off On]	Shift+F1
[Icon]	Negative transition-sensing contact[On for 1 scan when On Off]	Shift+F2
[Icon]	Horizontal line	F5
[Icon]	Vertical line	F6
[Icon]	Fill horizontal line	Shift+F8
[Icon]	Coil	F9
[Icon]	NOT instruction contact	Shift+F9
[Icon]	Negated coil	F11
[Icon]	SET coil	Shift+F3
[Icon]	RESET coil	Shift+F4
[Icon]	Positive transition-sensing coil [On for 1 scan when Off On]	Shift+F5
[Icon]	Negative transition-sensing coil [On for 1 scan when On Off]	Shift+F6
[Icon]	Function	F10

Note) Addition of 'EDGE' detection instructions

Develop user-friendly programming through adding D, D NOT instructions (Rising EDGE, dropping EDGE) to contact and output coil.




Program download

Connection setting

- Check a setting for connection between XGT and XG5000
- XGT supports USB and RS-232C


Set up communication port and download speed

- * using 'USB TO RS-232C' converter, 115,200bps connection may be unavailable depending on characteristics of converter. In this case, change the communication speed to 38,400bps.

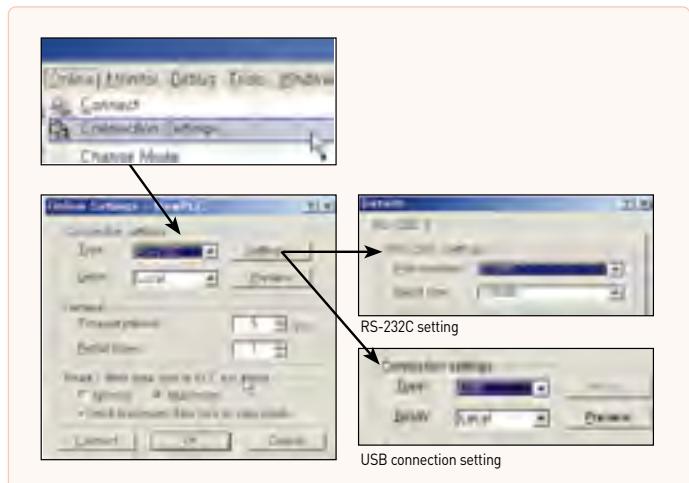


Connection

Connect to PLC and download the program as below.

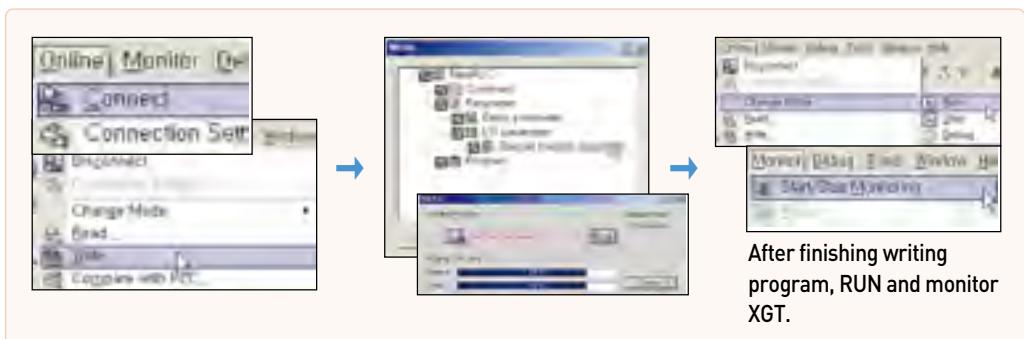


Short icon

* XGT doesn't support collective-writing monitoring for system safety.

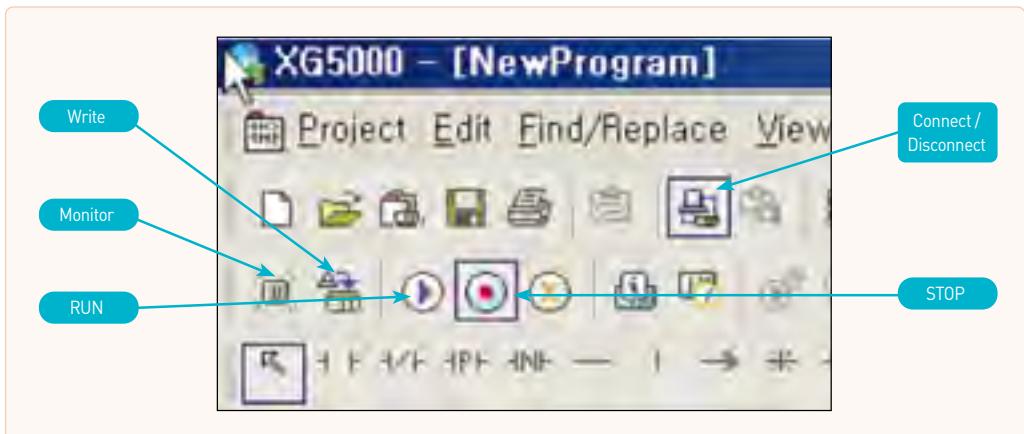


Online Editing

Select [Start Online Editing] in Online menu.

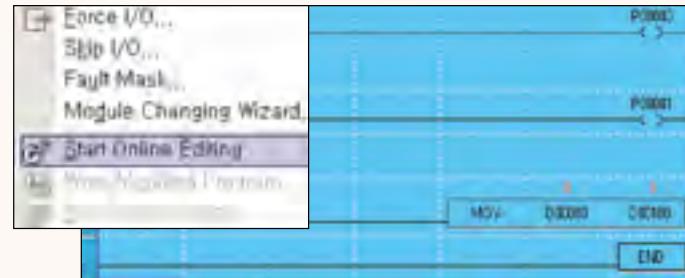


When starting Online Editing, the screen color becomes blue.

Modify the program.

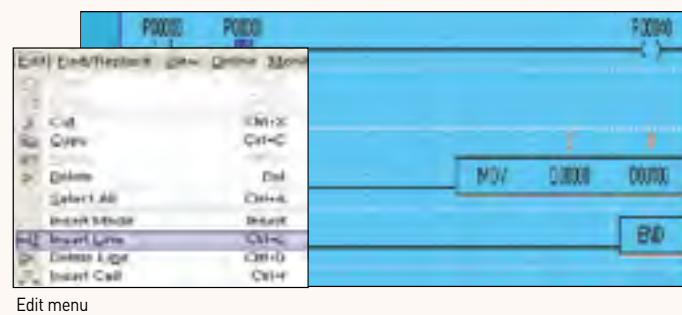


Edit menu

After finishing modifying the program, select [Write Modified Program] and [End Online Editing].

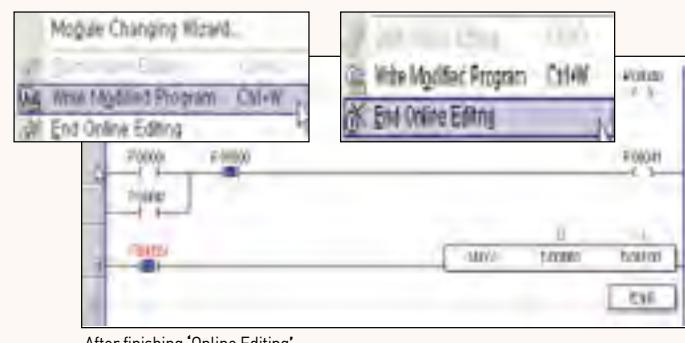

After finishing 'Online Editing'

Open a project written in KGL-WIN

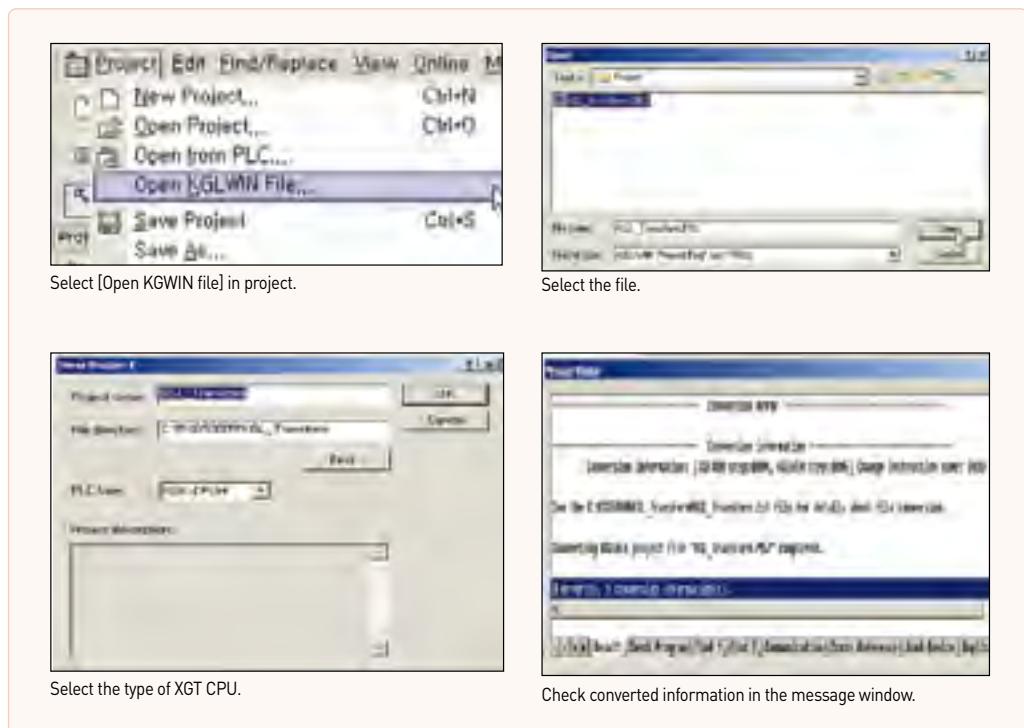

Note Dedicated instructions and special parameters for MASTER-K cannot be converted.
Mostly General instructions and descriptions are converted.
Information impossible to be converted is displayed as ERR.


ERR

Content of main special flag (F) change

MASTER-K	XGT	Specifications
F10	F99	ON regularly
F11	F9A	OFF regularly
F12	F9B	ON during first one scan
F13	F9C	OFF during first one scan


For more detailed information, refer to user's manual.

Data type

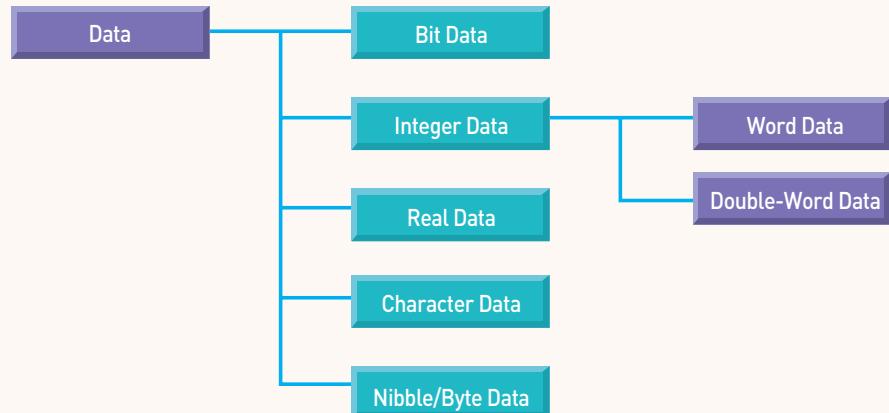


- Nibble: 4-bit unit data
- Byte: 8-bit unit data
- Real Data: 32-bit/64-bit floating point data


Real Number

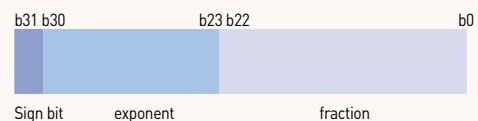

Long Real Number

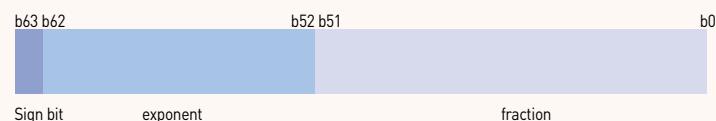

- Character Data: Saving numbers, alphabets, symbols as a type of ASCII code

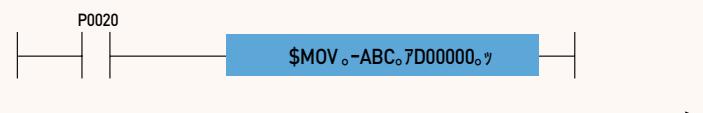

D100
D101
D102
D103
D104


Device type

Device	Size	Bit Contact	Word Data	Name
P	32768 points	P0000 ~ P2047F	P0000 ~ P2047	I/O Relay
M	32768 points	M00000 ~ M2047F	M0000 ~ M2047	Assistant Relay
L	180224 points	L00000 ~ L11263F	L0000 ~ L11263	Link Relay
N ^{*1)}	21K words	N/A	N00000 ~ N21503	Comm. data register
K	32768 points	K00000 ~ K2047F	K0000 ~ K2047	Keep Relay
F	32768 points	F00000 ~ F2047F	F0000 ~ F2047 S	pecial Relay
T ^{*2)}	2048 points	T0000 ~ T2047	T0000 ~ T2047	Timer
C ^{*3)}	2048 points	C0000 ~ C2047	C0000 ~ C2047	Counter
U	3072 words	U00.00.0 ~ U7F.31.F	U00.00 ~ U7F.31	Special Module Counter
Z	128 words	N/A	Z0 ~ Z127	Index Register
S	128 groups	S00.00 ~ S127.99	N/A	Step Control Relay
D	32K words	D00000.0 ~ D32767.F	D00000 ~ D32767	Data Register
R (Internal RAM) ^{*4)}	32K words	R00000.0 ~ R32767.F	R00000 ~ R32767	File Register
ZR (Internal RAM) ^{*5)}	32K words	N/A	ZR00000 ~ ZR65535	File Register
R (Expanded)	1M words	N/A	Available as much as extension size	File Register
ZR (Expanded)	1M words	N/A	Available as much as extension size	File Register

- Note**
1. When communication module is not used, it can be used as internal data area.
 2. Word data in timer shows a current value of relevant bit contact.
 3. Word data in counter shows a current value of relevant bit contact
 4. Even when using more than 32K words internal RAM, bit contact available to display is R00000.0~R32767.F Also word data enable to be displayed in the range of R00000.0~R32767.F
 5. When internal RAM is more than 32K words, bit contact can be in the range of ZR00000.0~ZR32767.F and word data can be displayed as much as the size of internal RAM

Special module register U


Register for reading data from special module mounted in slot

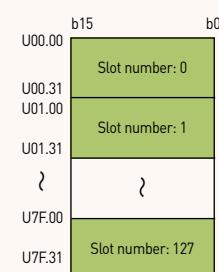

- Assigning 32 words per slot in U area
- Bit type display available
Ex) U93.12.x (x: Bit location, Hexadecimal display)
- Available to read/write internal memory value of special module without using PUT (P), GET (P), PUTS (P), GETS (P)
- Basic display in U area
Ex) Uxy.z
 - x: Base number (0~7)
 - y: Slot number (0~F)
 - z: Word number of special module internal memory

File register R, ZR

Register that a recorded value is not deleted when power failure is occurred. File register is used for data backup or data storage.

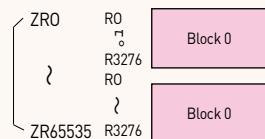


R: Block unit access
ZR: Entire file register access

Internal RAM (Temporary preservation): 32K words
FLASH (Permanent preservation): 1M words

Index register

Index register sets up devices using index function.


The sum of index register value and directly specified device number is real device number.

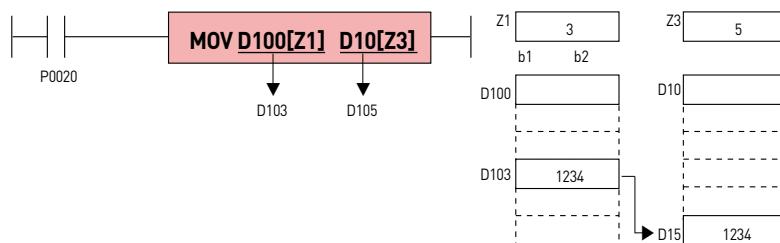

Available Device

- Bit Device: P, M, L, K, F, T, C
 - Word Device: U, D, R, ZR, N, present value of T and present value of C
- Ex) MOV T1[Z1] D10 : If Z1 is 5, present value of T(1+5)=T6 is transmitted to D10.
Ex) LOAD D10[Z1].5 : If Z1 is 5, LOAD(10+5).5 => LOAD D15.5 is set.

Bit specifying method of word device

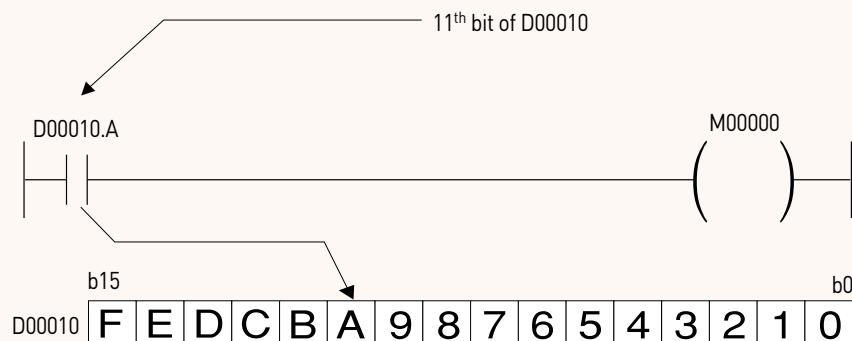



By assigning bit number to word device, bit data is available to use.




In this case, word device number should be addressed as decimal and bit number should be addressed as hexadecimal.

Relevant Device: U, D, R

Instructions

Classification	Designations	Symbol	Description	No. of step
16 Bits transfer	MOV		$(\$) \rightarrow (D)$	2
	MOV P			3
32 Bits	DMOV		$(\$+1, \$) \rightarrow (D+1, D)$	2
	DMOV P		$(\$+3, \$+2, \$+1, \$) \rightarrow (D+1, D)$	5

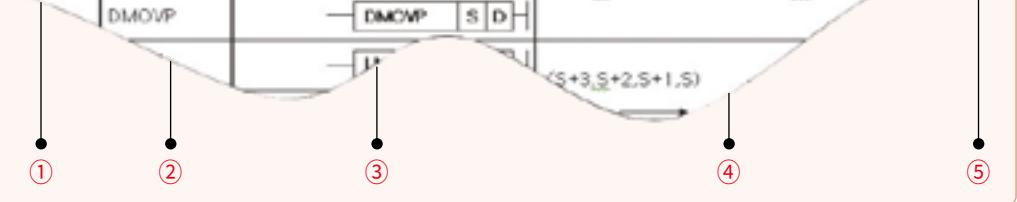

① Classification: Classifies instructions into applications.

② Designations: Displays instruction names to be used in program.

- Display rules: Instructions shall be basically displayed in word unit. According to data size, operation characteristics, real number data process, text process, the rules are as follows;
- Based on Data Size & Type
 - D: Double Word related instruction.
 - R: Real Number related instruction.
 - L: Long Real Number related instruction.
 - However, LMOV is 64 Bits transfer instruction.
 - \$: String related instruction.
 - G: Group calculation.
 - 4: Nibble related instruction, used only at the back of instruction.
 - 8: Byte related instruction, used only at the back of instruction.
 - 3: Instruction that process 3 operands, used only at the back of instruction.
- Based on Operation Characteristics
 - P: Instruction that is executed for 1 scan when input signal is changed OFF => ON

③ Symbol: Displays symbols used in program, showing the number of used operands and the type of Source or Destination. Operand display rules are as follows;

- S: Source, with data value not changed after calculated.
- D: Destination, with data value changeable after calculated.
- N, n: The number to process.
- St, En: Start and End, used only in BSFT & WSFT.
- Sb: Source in case Bit position is specified, mostly used in Nibble/Byte instruction.
- Db: Destination in case Bit position is specified.
- Z: Control word, which means previously specified format as based on each instruction.

④ Description: Describes general functions of instruction.

⑤ No. of step: The number of basic steps of instruction, which means the number of steps in case indirect specification, index formula and direct variable input were not used.

Features

- Default settings of the network and easy of user program
- Network system and provides extensive monitoring and control of the communication module
- Efficient implementation of a fast interface with the CPU to the network management
- Easy access with XGT and Modbus
- Rich built-in diagnostic function (Condition of CPU, Link, Auto SCAN, Frame monitor)




Item	Industrial Ethernet network				Fieldbus network				
	RAPIEnet	EtherNet/IP	Modbus TCP/IP	XGT dedication	Cnet	Fnet	Rnet	DeviceNet	Profibus-DP
Network service	Smart extension	○	○	-	-	-	-	-	-
	High speed link	○	-	-	○	-	○	○	○
	P2P	○	○	○	○	○	-	-	○
	XGT server	-	-	-	○	○	-	-	-
	Modbus server	-	-	○	-	○	-	-	-
Smart extension	Max. station	63	63	-	-	-	-	-	-
	Network cycle time	2~1000ms	2~2,147,483,647ms	-	-	-	-	-	-
	No. of block	64	64	-	-	-	-	-	-
	Data per block	768 bytes	1400 bytes	-	-	-	-	-	-
High speed link	Max. station	64	-	-	64	-	64	63	123
	No. of block	128	-	-	128	-	64	64	123
	Send block	64	-	-	32	-	32	32	123
	Receive block	128 - Send block	-	-	128 - Send block	-	64 - Send block	32	63
	Data per block	200 words	-	-	200 words	-	60 words	60 words	256 bytes
P2P	No. of block	64	64	64	64	-	-	-	64
	Data per block	1400 bytes	1400 bytes	125 bytes	1400 bytes	256 bytes	-	-	244 bytes
Transmission speed Media		100/1,000Mbps	100/1,000Mbps	100/1,000Mbps	100/1,000Mbps	900~115,200Mbps	1Mbps	1Mbps	125/250/500kbps
Topology		Ring, Line, Srat	Line, Srat	Line, Srat	Line, Srat	Bus	Bus	Bus, Srat	Bus, Srat
Configuration Tool		XG5000					XG5000 / N Configurator		

Various network diagnosis and monitoring

- Auto Scan: Searching and displaying each node connected to network
- Ping Test : Indicates the port connection status of other stations connected to the network.
- View Communication Module Log : Communication module history view function of XG5000 program can check whether error occurred and measures
- Remote O/S download : Update OS of the remote module connected to the network.
- Loopback test : This function is to check for port anomalies and performs a loopback test for each port.
- System synchronization : Synchronize current PLC status to system diagnosis
- Frame Monitor: Collecting and displaying sending/receiving frame in real time



Item	Industrial Ethernet network				Fieldbus network				
	RAPIEnet	EtherNet/IP	Modbus TCP/IP	XGT dedication	Cnet	Fnet	Rnet	DeviceNet	Profibus-DP
Communication module status	○	○	○	○	○	○	○	○	○
Service status	○	○	○	○	○	○	○	○	○
Media information	○	○	○	○	○	-	-	-	-
Auto Scan	○	○	○	○	-	○	○	○	○
Ping Test	-	○	○	○	-	-	-	-	-
View Communication Module Log	○	○	○	○	○	○	○	-	○
Remote O/S download	○	-	-	-	-	-	-	-	-
Loopback test	○	○	○	○	○	-	-	-	-
System synchronization	○	○	○	○	○	○	○	○	○
Frame monitor	-	-	-	-	○	-	-	-	-

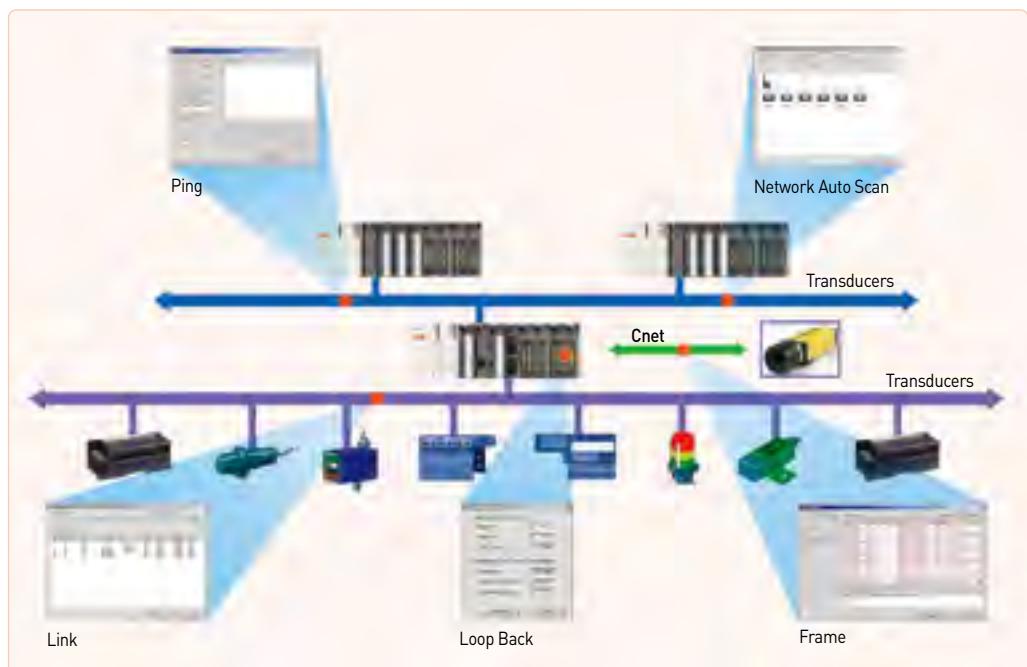



XGT Panel iXP2 Series

Main Specification

- Aluminum body frame, responsive touch screen.
- Easy-to-use Multi-touch, gesture, dual screen, portrait mode.
- Multi connected with 1Gbits 2ch.
- Ethernet between PC to PLC.
- Various interfaces : USB host /device, SD card, HDMI.
- High resolution : 1024 X 768
- IP66, UL type 4x, NEMA 4x standards
- Explosion proof. IECEx, ATEX, KCs



Item	iXP2-0800A/D	iXP2-1000A/D	iXP2-1200A/D	iXP2-1500A/D
Display type		TFT color LCD		
Screen size	8.4"	10.4"	12.1"	15"
Display resolution	800×600		1,024×768	
Color indication		24-bit color [16.7M colors]		
Backlight		LED method, automatic On / Off support		
Backlight lifetime		50,000 hour		
Touch panel		Capacitive touch		
Audio output		Magnetic buzzer [85dB]		
Processor		1GHz, Dual core		
Memory	Flash	1GB		
	Operating RAM	1GB		
	Backup RAM	1 Mbyte		
Backup data		Date / Time data, Logging / Alarm / Recipe data, Non-volatile devices		
Battery		CR2032[3.0V/210mAh, About 3years/25°C]		
Video output		1 × HDMI		
Ethernet		1×10Base-T / 100Base-TX, 1×10Base-T / 100Base-TX / 1000Base-T		
USB host		3 x USB 2.0 [Front X 1, Rear x 2]		
USB device		1 × USB 2.0 [Send / Receive front, PC and project data etc.]		
RS-232C		1 × RS-232C [DSUB 9 / Male type]		
RS-422/485		1 × RS-422/485 [Terminal block]		
Multi-language		Can display 12 languages simultaneously		
Animation		GIF format support		
Recipe		Support		
Data logging		Support		
Script launcher		Support		
Standard certification		CE, KC, UL, IECEx, ATEX, KCs		
Protection standard		IP66, Conform to the UL type 4x, NEMA 4x standard		
Explosion proof		Ex nA IIC T5 Gc, Ex tc IIIC T100°, Dc IP64		
Dimensions (mm)	240×180×60	271×212×60	313×239×60	395×294×66
Panel cut (mm)	228.5×158.5	259.0×201.0	301.5×227.5	383.5×282.5
Power		iXP2-xxxxA : AC100 / 240V, iXP2-xxxxD : DC24V		
Power consumption (W)	25	25	30	30
Weight (Kg)	1.87	2.35	3.0	4.6

Fully compatible with eXP

- Panel cut, interface, design, and drawing file are 100% compatible.

Superior Performance

- ARM Cortex A8 800MHz, eMMC 4G, DDR3

Enhanced product reliability

- LCD Backlight lifespan extended
- Non Battery Type NVRAM

Variety of interfaces and functions

- Various communication drivers and Micro SD I/F available



US LISTED


Item	eXP2-04□*0D	eXP2-05□*0D	eXP2-05□*2D	eXP2-07□*0D	eXP2-07□*1D	eXP2-07□*2D	eXP2-10□*0D	eXP2-10□*1D
Display Type								
Screen Size	10.9cm (4.3")	14.2cm (5.6")		17.8cm (7")			25.9cm (10.1")	
Display Resolution	480 x 272	640 x 480		800 x 480			1024 x 600	
Color Indication	24Bit Color (16.7M)	18Bit Color (262,144)		24Bit Color (16.7M)			24Bit Color (16.7M)	
Indication Degree	Left/Right: 60 deg. Upper: 40 deg. Lower: 50 deg	Left/Right: 60 deg. Upper: 40 deg. Lower: 60 deg.		Left/Right: 70 deg. Upper: 50 deg. Lower: 70 deg.			Left/Right: 70 deg. Upper: 50 deg. Lower: 70 deg.	
Backlight	LED Type (Supports Backlight Auto-off Function)							
Backlight Duration	50,000 Hours	20,000 Hours		50,000 Hours			30,000 Hours	
Touch Panel	4-Wire Resistive, Analog							
Audio Output	Magnetic Buzzer (85dB)							
Process	800MHz	800MHz		800MHz			800MHz	
Memory	Drawing Memory	64MB	64MB	64MB	64MB		64MB	
	Operating RAM	512MB	512MB	512MB	512MB		512MB	
	Operating RAM	128KB	128KB	128KB	128KB		128KB	
Backup Data	Date/Hour Data, Logging/Alarm/Recipe Data and Nonvolatile Device							
Battery Life	Approx. 3 years (Operating Ambient Temperature of 50°C)							
Ethernet	1 Channel, IEEE802.1a, 10Base-T/100Base-TX	-	1 Channel, IEEE802.1a, 10Base-T/100Base-TX	-	1 Channel, IEEE802.1a, 10Base-T/100Base-TX		1 Channel, IEEE802.1a, 10Base-T/100Base-TX	
USB Host	1 Channel, USB 2.0 Host (Mouse, keyboard, printer, USB flash drive, etc.)							
USB Device	-	1 Channel, USB 2.0 Device (for Download and Upload Project)					1 Channel, USB 2.0 Device (for Download and Upload Project File)	
Micro SD Card	-	-	-	1 Channel SDHC Class10	-	-	1 Channel SDHC Class10	
RS-485, RS-232C	1 Channel, RS-232C (DSUB 9/Male Type)							
RS-422/485	1 Channel, RS-422/485 (DSUB 9/Male Type)							
Multi-language	Up to 12 Language Simultaneously							
Animation	GIF Format is Available							
Recipe	Available							
Data Logging	Available							
Script Executor	Available							
Certifications	CE, UL(cUL), UL Type 4X, KC	CE, UL(cUL), KC	CE, UL(cUL), UL Type 4X, KC	CE, UL(cUL), KC	CE, UL(cUL), UL Type 4X, KC			
Protection Standard	IP65 <small>Note 1)</small>	IP65 <small>Note 1)</small>		IP65 <small>Note 1)</small>			IP65 <small>Note 1)</small>	
Dimension (mm)	128 x 102 x 32.5	165 x 132.5 x 36.1		208 x 154 x 44.4			276 x 218 x 35.1	
Panel Cut (mm)	119 x 93	156 x 123.5		192 x 138			260 x 202	
Rated Voltage	DC24V	DC24V		DC24V			DC24V	
Power Consumption (W)	4	5.5	5.5	6	6		6	
Weight (kg)	0.27	0.43	0.43	0.59	0.59	0.58	1.0	1.0

□*:0 (WinCE 7.0 Core), 1 (WinCE 7.0 Pro)

Note 1): IP66 for UL Type 4X models.

Text type XP10


- Screen: 192×64 Graphic STN LCD
- System RAM: 1000 words
- Flash memory: Program/Parameter back up
- Communication: Half-duplex comm.
 - Baud rate: 1200~115200 bps
 - Master/slave setting available
 - RS-232C/RS-485 2 CH separate to use
- Power requirements - 24 V input or 5 V direct input by LS PLC
- Various function key - ESC, ALM, SET, ENT, F1~F4, Arrow keys
- Panel Editor - Easy programming and H/W setting

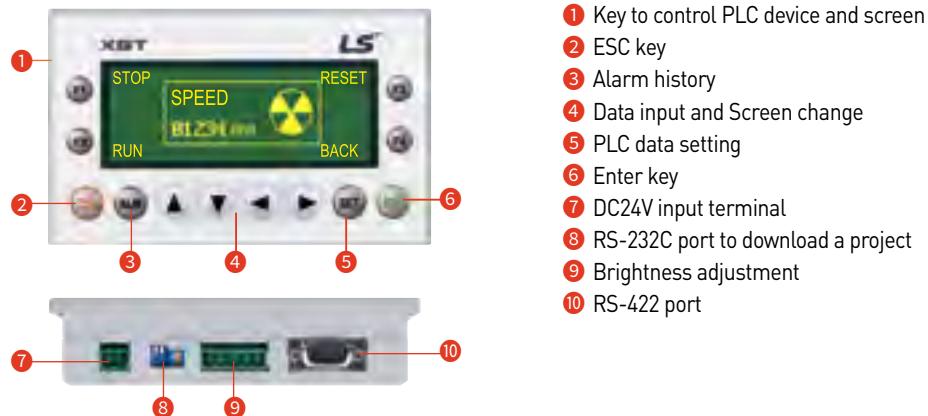

Item	Specifications	
	XP10BKA/DC	XP10BKB/DC
Input voltage	5VDC	DC 4.9 ~ 5.1 [RS-232C port]
	24VDC	DC 21.6 ~ 26.4 [DC Input connector]
	Consumption current	Less than 200mA
Display	LED back-light (192 x 64 Dots)	
Communication interface	RS-232C, RS-422/485	
Flash memory	256K bytes	
Language	Default: English, Can be switched to Korean/Chinese/Russian	
RTC	None	Supports
Download specification	115,200bps	
Keys	12 Keys {F1~F4, ESC, ALM, ▲, ▼, ◀, ▶, SET, ENT}	

Features


- Windows-based easy operation
- Supporting all types of LS APM module
- Improved parameter editing
(Copy, Paste, Initialization, etc.)
- Various monitoring
(Operation type of each axis, etc.)
- Profile trace and operation monitoring
- Profile graph and simulation of circular interpolation
- Available to edit operation parameter in EXCEL

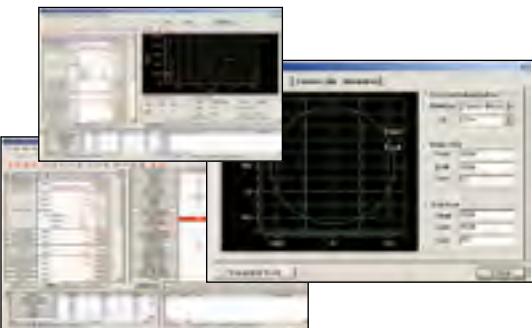

Seq	Axis	Code	Coord	Time	Vel	Interpolation	Acceleration	Vmax	AT%	Interpolation	Curve	Delta
1	A01	001	000	00	1000	00	00	100	00	00	00	00
2	A01	002	000	00	1000	00	00	100	00	00	00	00
3	A01	003	000	00	1000	00	00	100	00	00	00	00
4	A01	004	000	00	1000	00	00	100	00	00	00	00
5	A01	005	000	00	1000	00	00	100	00	00	00	00
6	A01	006	000	00	1000	00	00	100	00	00	00	00
7	A01	007	000	00	1000	00	00	100	00	00	00	00
8	A01	008	000	00	1000	00	00	100	00	00	00	00
9	A01	009	000	00	1000	00	00	100	00	00	00	00
10	A01	010	000	00	1000	00	00	100	00	00	00	00
11	A01	011	000	00	1000	00	00	100	00	00	00	00
12	A01	012	000	00	1000	00	00	100	00	00	00	00
13	A01	013	000	00	1000	00	00	100	00	00	00	00
14	A01	014	000	00	1000	00	00	100	00	00	00	00
15	A01	015	000	00	1000	00	00	100	00	00	00	00
16	A01	016	000	00	1000	00	00	100	00	00	00	00
17	A01	017	000	00	1000	00	00	100	00	00	00	00
18	A01	018	000	00	1000	00	00	100	00	00	00	00
19	A01	019	000	00	1000	00	00	100	00	00	00	00
20	A01	020	000	00	1000	00	00	100	00	00	00	00

Operation Data

Define operation method, target location, operation speed of each axis.

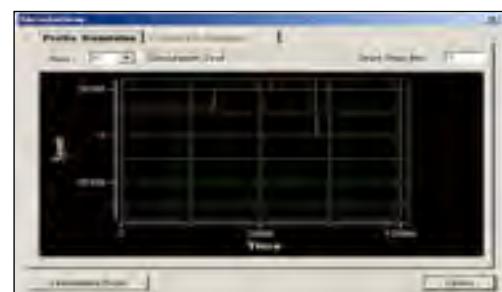


Profile simulation (Off-line)

Monitoring operation speed of each axis with graph type and saving result as image file.




Profile Trace (On-line)

Monitoring operation speed of each axis with graph type and saving result as image file.

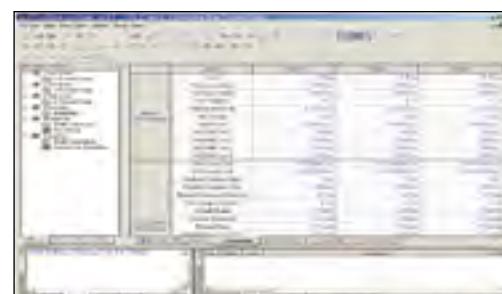


Operation parameter

Setting basic operation characteristics and limit value.

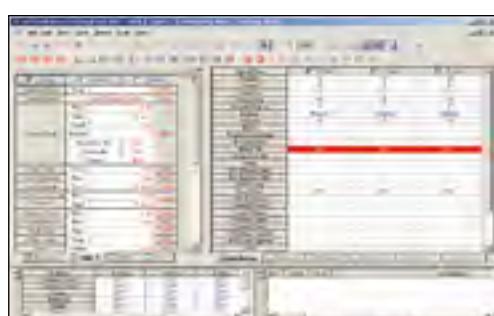

Monitoring (On-line)

Checking basic operation characteristics about each axis and monitoring operation condition.

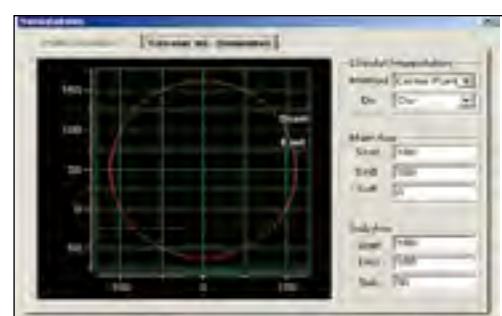

Circular interpolation simulation (Off-line)



Product list

CPU / PWR / Base / I/O

CPU	XGK-CPUH*, CPUU, CPUHN, CPUUN	6,144pt, Program memory : 64Ksteps
	XGK-CPUS*, CPUA, CPUUS	3,072pt, Program memory : 32Ksteps
	XGK-CPUE*	1,536pt, Program memory : 16Ksteps
	XGI-CPUJN, CPUJD, CPUU, CPUH*	9,144pt (IEC type), Program memory:1Mbyte
	XGI-CPUS*	3,072pt (IEC type), Program memory:128kbyte
	XGI-CPUE*	1,536pt (IEC type), Program memory:64kbyte
Power	XGP-ACF1*	Free Voltage/DC5V 3A, DC24V 0.6A
	XGP-ACF2*	Free Voltage/DC5V 6A
	XGP-AC23*	220V/DC5V 8.5A
	XGP-DC42*	DC24V/DC5V 6A
Main base	XGB-M04A*	4 Slot
	XGB-M06A*	6 Slot
	XGB-M08A*	8 Slot
	XGB-M10A*	10 Slot
	XGB-M12A*	12 Slot
Expansion base	XGB-E04A*	4 Slot
	XGB-E06A*	6 Slot
	XGB-E08A*	8 Slot
	XGB-E12A*	12 Slot
Input	XGI-A12A	AC110V, 16pt
	XGI-A21A	AC220V, 8pt
	XGI-A21C	AC 220V Input, 8pt(1COM)
	XGI-D21A	DC24V, 8pt
	XGI-D22A*	DC24V, 16pt, Sink/Source
	XGI-D22B	DC24V, 16pt, Source
	XGI-D24A*	DC24V, 32pt, Sink/Source
	XGI-D24B	DC24V, 32pt, Source
	XGI-D28A*	DC24V, 64pt, Sink/Source
	XGI-D28B	DC24V, 64pt, Source
Output	XGQ-RY1A	Relay, 8pt
	XGQ-RY2A*	Relay, 16pt
	XGQ-RY2B	Relay, 16pt, Surge killer
	XGQ-SS2A	Triac, 16pt
	XGQ-TR1C	Transist, 8pt(2A, 1COM)
	XGQ-TR2A*	Transist, 16pt, Sink
	XGQ-TR2B	Transist, 16pt, Source
	XGQ-TR4A*	Transist, 32pt, Sink
	XGQ-TR4B	Transist, 32pt, Source
	XGQ-TR8A*	Transist, 64pt, Sink
Input/output	XGQ-TR8B	Transist, 64pt, Source
	XGH-DT4A*	DC24V 16pt, Transist, 16pt, Sink

* : G3 Coating Products

Special module

Analog input	XGF-AV8A*	Voltage, 8ch
	XGF-AC8A*	Current, 8ch
	XGF-AD8A*	Voltage /Current, 8ch
	XGF-AD16A*	Insulation Voltage /Current, 16ch
	XGF-AD4S*	Voltage /Current, 4ch
	XGF-AW4S*	2-wire, Voltage/ Current input, 4Ch (Isolated)
Analog output	XGF-DV4A*	Voltage, 4ch
	XGF-DC4A*	Current, 4ch
	XGF-DV8A*	Voltage, 8ch
	XGF-DC8A*	Current, 8ch
	XGF-DV4S*	Voltage, 4ch, Insulation
	XGF-DC4S*	Current, 4ch, Insulation
Analog input/output	XGF-DA4S	Voltage/Current, 4ch, Insulation
	XGF-AH6A*	Input: 4ch, Voltage/ Current Output: 2Ch Voltage/ Current
HART I/F Analog input/output	XGF-AC4H	Input: 4ch
	XGF-DC4H	Output: 4Ch
High speed counter	XGF-HO2A*	Open collector, 2ch
	XGF-HD2A*	Line drive, 2ch
Positioning	XGF-HO8A *	8-channels high speed counter module, 8Ch
	XGF-P01H-P04H	Open collector, 1~4axis
	XGF-PD1H-PD4H	Line drive, 1~4axis
	XGF-PN8A	LS ELECTRIC EtherCAT Network, 8axis
Positioning (Network type)	XGF-PN8B	Standard EtherCAT Network, 8axis
	XGF-PN4B	Standard EtherCAT Network, 4axis
	XGF-M16M	MECHATROLINK-II, 4axis
Motion control	XGF-M32E	Standard EtherCAT, 32axes
	XGF-RD8A	RTD, 8ch
Temperature input	XGF-RD4A*	RTD, 4ch
	XGF-RD4S*	RTD, 4ch, Insulation
	XGF-TC4S*	Thermo couple, 4ch, Insulation
	XGF-TC4UD	Input: 4Ch(Voltage/Current/RTD/TC) Output: 8Ch[TR/Current] 4loops
Temperature controller	XGF-TC4RT	Input:4Ch[RTD] Output: 4Ch[TR] 4loops
	XGF-SOEA	DC24V, 32points
Datalog	XGF-DL16A	USB 2.0, CF2001, Max. 16Gbyte, 32points[input 22points, output 10points]

* : G3 Coating Products

Communication module

OPC UA	XGL-EOPCT	OPC UA, Twisted fair 2Ch
RAPIDnet+ -RAPIDnet v2 -EtherNet/IP -Modbus TCP/IP -Dedicated XGT Network	XGL-EFMTB*	Master/Client, Twisted fair 2ch.
	XGL-EFMFB*	Master/Client, Fiber optic 2ch.
	XGL-EFMHB*	Master/Client, Twisted fair/fiber optic
	XGL-DBDT	Expansion driver-Twisted pair 2ch.
	XGL-DBDF	Expansion driver-Fiber optic 2ch.
	XGL-DBDH	Expansion driver-Fiber optic/Twisted pair
	XOL-ES4T	Stand alone switch twisted pair 4ch.
	XOL-ES4H	Stand alone switch twisted 2ch. fiber 2ch.
	XGL-EH5T	Open Ethernet switching hub
	XGL-CH2B*	RS-232C 1ch, RS-422/485 1ch
Computer Link (Cnet)	XGL-C22B*	RS-232C 2ch
	XGL-C42B*	RS-422/485 2ch
DeviceNet(Dnet)	XGL-DMEB*	DeviceNet, Master
Profibus-DP (Pnet)	XGL-PMEB*	Profibus-DP, Master
	XGL-PSRA	Profibus-DP Slave, Remote interface
	XGL-PSEA	Profibus-DP Slave
Rnet	XGL-RMEB*	Rnet, Master, TP
	GOL-RR8T	Rnet stand alone repeater hub
Fnet	XGL-FMEA	Fnet, Master
BACnet/IP	XGL-BIPT	BACnet client/server
RAPIDnet V1	XGL-EIMT	RAPIDnet, Twisted fair 2ch
	XGL-EIMF	RAPIDnet, Fiber optic 2ch
	XGL-EIMH	RAPIDnet, Twisted fair, Fiber optic
EtherNet/IP	XGL-EIPT	Industrial Ethernet, Twisted fair 2ch

* G3 Coating Products

XGR module


CPU	XGR-CPUH/T*	Twisted pair
	XGR-CPUH/F	Fiber optic(2km)
	XGR-CPUH/S	Fiber optic(15km)
Power	XGR-AC12*	110V, 5.5A(Main base)
	XGR-AC13*	110V, 8.5A(Expansion base)
	XGR-AC22*	220V, 5.5A(Main base)
	XGR-AC23*	220V, 8.5A(Expansion base)
	XGR-DC42*	DC24V/DC5V 7A, Main(Expansion base)
Base	XGR-M06P*	6Slot(Main base)
	XGR-M02P*	2Slot(Main base)
	XGR-E08P	8Slot(Expansion base)
	XGR-E12P*	12Slot(Expansion base)
	XGR-E12H*	12Slot(Expansion base, Drive Redundancy)
Expansion drive	XGR-DBST*	Twisted pair - Twisted
	XGR-DBSF*	Pair Fiber optic - Fiber optic(2km)
	XGR-DBSH*	Twisted pair - Fiber optic(2km)
	XGR-DBSFS	Pair Fiber optic - Fiber optic(15km)
	XGR-DBSHS	Twisted pair - Fiber optic(15km)
Expansion drive redundancy	XGR-DBDT	Twisted pair - Twisted
	XGR-DBDF	Pair Fiber optic - Fiber optic(2km)
	XGR-DBDH	Twisted pair - Fiber optic(2km)

* G3 Coating Products


CPU	Product	Description
Expansion cable	XGC-E041	0.4m
	XGC-E061	0.6m
	XGC-E121	1.2m
	XGC-E301	3.0m
	XGC-E501	5.0m
	XGC-E102	10m
	XGC-E152	15m
Termination connector	XGT-TERA	Termination connector for expansion base download cable
USB cable	USB-301A	USB download cable
RS232C cable	K1C-050A	RS232C download cable
Sync & Expansion cable	XGC-F201	2m (Fiber optic)
	XGC-F501	5m (Fiber optic)
Dummy	XGT-DMMA	Dummy module
	XGR-DMMA	Dummy module

Dimensions


- Base

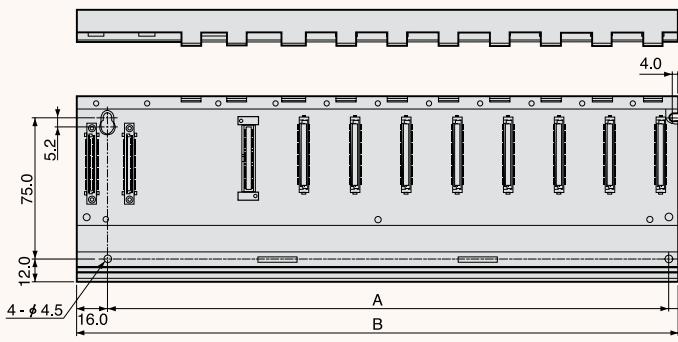

- Power module

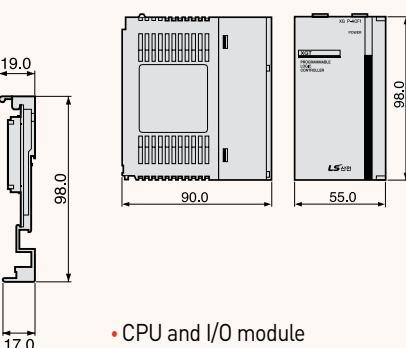


- CPU and I/O module

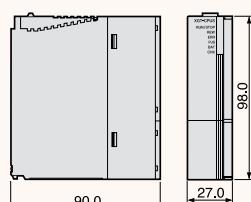


Base Dimensions (W)

Item	XGB-M04A/E04A	XGB-M06A/E06A	XGB-M08A/E08A	XGB-M10A	XGB-M12A/E12A
A	190	244	298	356	406
B	210	264	318	375	426


- Base base

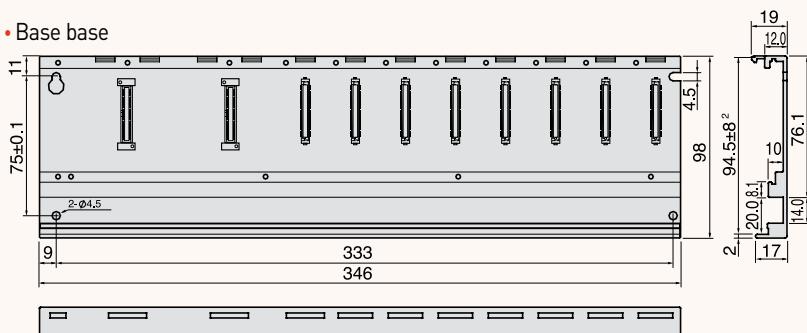


- Expansion base

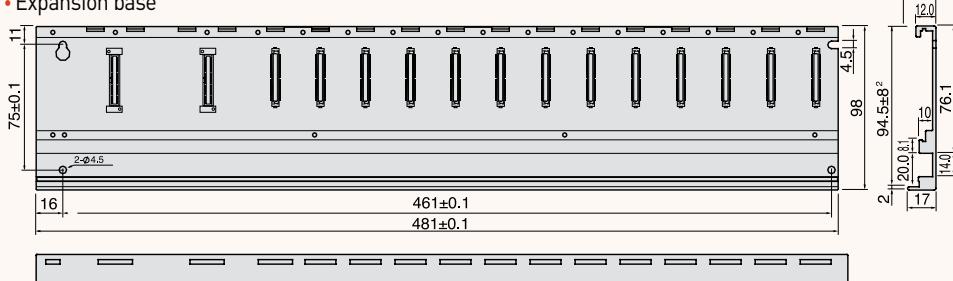

- Power and CPU

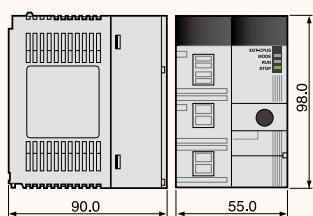

- I/O

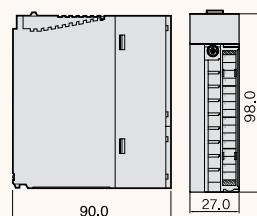

Base Dimensions (W)

Item	XGR-M06P	XGR-E08P	XGR-E12P
A	333	353	461
B	346	373	481

Memo

Programmable Logic Controller 146 / 147



Safety Instructions

- For your safety, please read user's manual thoroughly before operating.
- Contact the nearest authorized service facility for examination, repair, or adjustment.
- Please contact qualified service technician when you need maintenance.
Do not disassemble or repair by yourself!
- Any maintenance and inspection shall be performed by the personnel having expertise concerned.



- According to The WEEE Directive, please do not discard the device with your household waste.



■ Headquarter

LS-ro 127(Hogye-dong) Dongan-gu, Anyang-si, Gyeonggi-Do, 14119, Korea

■ Seoul Office

LS Yongsan Tower, 92, Hangang-daero, Yongsan-gu, Seoul, 04386, Korea
Tel: 82-2-2034-4033, 4888, 4703 Fax: 82-2-2034-4588
E-mail: automation@ls-electric.com

■ Overseas Subsidiaries

- LS ELECTRIC Japan Co., Ltd. (Tokyo, Japan)
Tel: 81-3-6268-8241 E-Mail: japan@ls-electric.com
- LS ELECTRIC (Dalian) Co., Ltd. (Dalian, China)
Tel: 86-411-8730-6495 E-Mail: china.dalian@lselectric.com.cn
- LS ELECTRIC (Wuxi) Co., Ltd. (Wuxi, China)
Tel: 86-510-6851-6666 E-Mail: china.wuxi@lselectric.com.cn
- LS ELECTRIC Middle East FZE (Dubai, U.A.E.)
Tel: 971-4-886-5360 E-Mail: middleeast@ls-electric.com
- LS ELECTRIC Europe B.V. (Hoofddorp, Netherlands)
Tel: 31-20-654-1424 E-Mail: europartner@ls-electric.com
- LS ELECTRIC America Inc. (Chicago, USA)
Tel: 1-800-891-2941 E-Mail: sales.us@lselectricamerica.com
- LS ELECTRIC Türkiye Co., Ltd.
Tel: 90-212-806-1225 E-Mail: Türkiye@ls-electric.com

www.ls-electric.com

■ Overseas Branches

- LS ELECTRIC Tokyo Office (Japan)
Tel: 81-3-6268-8241 E-Mail: tokyo@ls-electric.com
- LS ELECTRIC Beijing Office (China)
Tel: 86-10-5095-1631 E-Mail: china.auto@lselectric.com.cn
- LS ELECTRIC Shanghai Office (China)
Tel: 86-21-5237-9977 E-Mail: china.auto@lselectric.com.cn
- LS ELECTRIC Guangzhou Office (China)
Tel: 86-20-3818-2883 E-Mail: china.auto@lselectric.com.cn
- LS ELECTRIC Chengdu Office (China)
Tel: 86-28-8670-3201 E-Mail: china.auto@lselectric.com.cn
- LS ELECTRIC Qingdao Office (China)
Tel: 86-532-8501-2065 E-Mail: china.auto@lselectric.com.cn
- LS ELECTRIC Nanjing Office (China)
Tel: 86-25-8467-0005 E-Mail: china.auto@lselectric.com.cn
- LS ELECTRIC Bangkok Office (Thailand)
Tel: 66-90-950-9683 E-Mail: thailand@ls-electric.com
- LS ELECTRIC Jakarta Office (Indonesia)
Tel: 62-21-2933-7614 E-Mail: indonesia@ls-electric.com
- LS ELECTRIC Moscow Office (Russia)
Tel: 7-499-682-6130 E-Mail: info@lselectric-ru.com
- LS ELECTRIC America Western Office (Irvine, USA)
Tel: 1-949-333-3140 E-Mail: america@ls-electric.com
- LS ELECTRIC Italy office (Italy)
Tel: 39-030-8081-833 E-Mail: italia@ls-electric.com